



STATE OF UTAH - DEPARTMENT OF ADMINISTRATIVE SERVICES

**Division of Facilities Construction and Management**

**DFCM**

## **STANDARD LOW BID PROJECT**

**January 9, 2007**

# **ROOFING IMPROVEMENTS ADMINISTRATION BUILDING REGION II**

**DEPARTMENT OF TRANSPORTATION  
SALT LAKE CITY, UTAH**

DFCM Project Number 06188900

**Scott P. Evans – Architect & Associates P.C.  
108 W Center St  
Bountiful, Utah 84010**

# TABLE OF CONTENTS

	<u>Page Numbers</u>
Title Page	1
Table of Contents	2
Notice to Contractors	3
Project Description	4
Project Schedule	5
Bid Form	6
Instructions to Bidders	8
Bid Bond	12
Contractors Sublist Form	13
Fugitive Dust Plan	16
Contractor's Agreement	23
Performance Bond	28
Payment Bond	29
Change Order Form	30
Certificate of Substantial Completion	31
 Fairpark Map	

Current copies of the following documents are hereby made part of these contract documents by reference. These documents are available on the DFCM web site at <http://dfcm.utah.gov> or are available upon request from DFCM.

DFCM General Conditions dated May 25, 2005.

DFCM Application and Certification for Payment dated May 25, 2005.

Technical Specifications :

Drawings:

**The Agreement and General Conditions dated May 25, 2005 have been updated from versions that were formally adopted and in use prior to this date. The changes made to the General Conditions are identified in a document entitled Revisions to General Conditions that is available on DFCM's web site at <http://dfcm.utah.gov>**

# NOTICE TO CONTRACTORS

Sealed bids will be received by the Division of Facilities Construction and Management (DFCM) for:

**ROOFING IMPROVEMENTS - ADMINISTRATION BUILDING – REGION II**  
**DEPARTMENT OF TRANSPORTATION – SALT LAKE CITY, UTAH**  
**DFCM PROJECT NO: 06188900**

Bids will be in accordance with the Contract Documents that will be available at 10:00 AM on Tuesday, January 9, 2007, and distributed in electronic format only on CDs from DFCM, 4110 State Office Building, Salt Lake City, Utah and on the DFCM web page at <http://dfcm.utah.gov>. For questions regarding this project, please contact Darrell Hunting, DFCM, at 801 244-7647. No others are to be contacted regarding this bidding process. The construction budget for this project is \$115,000.

A **mandatory** pre-bid meeting will be held at 10:00 A.M. on Tuesday, January 23, 2007 at the UDOT Region II Administration Building, 2010 South 2760 West, Salt Lake City, Utah. All bidders wishing to bid on this project are required to attend this meeting.

Bids will be received until the hour of 1:00 PM on Wednesday, January 31, 2007 at the Wasatch Building at the Utah State Fairpark, approximately 155 North 1000 West, Salt Lake City, Utah. Refer to the map on the DFCM website for directions ([http://dfcm.utah.gov/downloads/fairpark\\_map.pdf](http://dfcm.utah.gov/downloads/fairpark_map.pdf)). Bids will be opened and read aloud in the Wasatch Building at the Utah State Fairpark. Note: Bids must be received at the Wasatch Building at the Utah State Fairpark by the specified time.

A bid bond in the amount of five percent (5%) of the bid amount, made payable to the Division of Facilities Construction and Management on DFCM's bid bond form, shall accompany the bid.

The Division of Facilities Construction and Management reserves the right to reject any or all bids or to waive any formality or technicality in any bid in the interest of DFCM.

DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT

Marla Workman, Contract Coordinator

4110 State Office Building, Salt Lake City, Utah 84114

## **PROJECT DESCRIPTION**

Remove existing single-ply membrane and built-up roofing down to metal decking and replace with new insulation and single-ply membrane. New membrane will be mechanically fastened. There will be some mechanical equipment to be modified.

**PROJECT SCHEDULE**

<b>PROJECT NAME:</b>		<b>ROOFING IMPROVEMENTS – ADMINISTRATION BLDG – REGION II</b>		
		<b>DEPARTMENT OF TRANSPORTATION – SALT LAKE CITY, UTAH</b>		
<b>DFCM PROJECT NO.</b>		<b>06188900</b>		
<b>Event</b>	<b>Day</b>	<b>Date</b>	<b>Time</b>	<b>Place</b>
Bidding Documents Available	Tuesday	January 9, 2007	10:00 AM	DFCM 4110 State Office Bldg SLC, UT and DFCM web site *
<b>Mandatory</b> Pre-bid Site Meeting	Tuesday	January 23, 2007	10:00 AM	UDOT Region II Administration Building 2010 South 2760 West SLC, UT
Last Day to Submit Questions	Thursday	January 25, 2007	4:00 PM	dhunting@utah.gov
Addendum Issued Responding to Questions (if needed)	Monday	January 29, 2007	4:00 PM	DFCM web site *
Prime Contractors Turn In Bid and Bid Bond	Wednesday	January 31, 2007	1:00 PM	Wasatch Building Utah State Fairpark Approx 155 North 1000 West Salt Lake City, UT **
Sub-contractor List Due	Thursday	February 1, 2007	1:00 PM	DFCM 4110 State Office Bldg SLC, UT Fax 801-538-3677
Substantial Completion Date	Friday	July 13, 2007	4:00 PM	Project Site

\* **NOTE:** DFCM's web site address is <http://dfcm.utah.gov>

\*\* **Due to the ongoing construction on Capitol Hill and the anticipated shortage of parking during 2007, all bids will be received and opened at the Wasatch Building at the Utah State Fairpark. Refer to map on the DFCM web site for directions ([http://dfcm.utah.gov/downloads/fairpark\\_map.pdf](http://dfcm.utah.gov/downloads/fairpark_map.pdf))**



STATE OF UTAH - DEPARTMENT OF ADMINISTRATIVE SERVICES

**Division of Facilities Construction and Management**

**DFCM**

## BID FORM

NAME OF BIDDER \_\_\_\_\_ DATE \_\_\_\_\_

To the Division of Facilities Construction and Management  
4110 State Office Building  
Salt Lake City, Utah 84114

The undersigned, responsive to the "Notice to Contractors" and in accordance with the "Instructions to Bidders", in compliance with your invitation for bids for the **ROOFING IMPROVEMENTS - ADMINISTRATION BUILDING - REGION II – DEPARTMENT OF TRANSPORTATION DFCM PROJECT # 06188900** and having examined the Contract Documents and the site of the proposed Work and being familiar with all of the conditions surrounding the construction of the proposed Project, including the availability of labor, hereby proposes to furnish all labor, materials and supplies as required for the Work in accordance with the Contract Documents as specified and within the time set forth and at the price stated below. This price is to cover all expenses incurred in performing the Work required under the Contract Documents of which this bid is a part:

I/We acknowledge receipt of the following Addenda: \_\_\_\_\_

For all work shown on the Drawings and described in the Specifications and Contract Documents, I/we agree to perform for the sum of:

\_\_\_\_\_ DOLLARS (\$\_\_\_\_\_)

(In case of discrepancy, written amount shall govern)

I/We guarantee that the Work will be Substantially Complete by **July 13, 2007**, should I/we be the successful bidder, and agree to pay liquidated damages in the amount of **\$200.00** per day for each day after expiration of the Contract Time as stated in Article 3 of the Contractor's Agreement.

This bid shall be good for 45 days after bid opening.

Enclosed is a 5% bid bond, as required, in the sum of \_\_\_\_\_

The undersigned Contractor's License Number for Utah is \_\_\_\_\_.

Upon receipt of notice of award of this bid, the undersigned agrees to execute the contract within ten (10) days, unless a shorter time is specified in the Contract Documents, and deliver acceptable Performance and Payment bonds in the prescribed form in the amount of 100% of the Contract Sum for faithful performance of the contract.

The Bid Bond attached, in the amount not less than five percent (5%) of the above bid sum, shall become the property of the Division of Facilities Construction and Management as liquidated damages for delay and additional expense caused thereby in the event that the contract is not executed and/or acceptable 100% Performance and Payment bonds are not delivered within the time set forth.

Type of Organization:

\_\_\_\_\_  
(Corporation, Partnership, Individual, etc.)

Any request and information related to Utah Preference Laws:

\_\_\_\_\_

Respectfully submitted,

\_\_\_\_\_  
Name of Bidder

ADDRESS:

\_\_\_\_\_  
\_\_\_\_\_

\_\_\_\_\_  
Authorized Signature

# INSTRUCTIONS TO BIDDERS

## 1. Drawings and Specifications, Other Contract Documents

Drawings and Specifications, as well as other available Contract Documents, may be obtained as stated in the Invitation to Bid.

## 2. Bids

Before submitting a bid, each contractor shall carefully examine the Contract Documents, shall visit the site of the Work; shall fully inform themselves as to all existing conditions and limitations; and shall include in the bid the cost of all items required by the Contract Documents. If the bidder observes that portions of the Contract Documents are at variance with applicable laws, building codes, rules, regulations or contain obvious erroneous or uncoordinated information, the bidder shall promptly notify the DFCM Representative and the necessary changes shall be accomplished by Addendum.

The bid, bearing original signatures, must be typed or handwritten in ink on the Bid Form provided in the procurement documents and submitted in a sealed envelope at the location specified by the Invitation to Bid prior to the deadline for submission of bids.

Bid bond security, in the amount of five percent (5%) of the bid, made payable to the Division of Facilities Construction and Management, shall accompany bid. **THE BID BOND MUST BE ON THE BID BOND FORM PROVIDED IN THE PROCUREMENT DOCUMENTS IN ORDER TO BE CONSIDERED AN ACCEPTABLE BID.**

If the bid bond security is submitted on a bid bond form other than DFCM's required bid bond form, and the bid security meets all other legal requirements, the bidder will be allowed to provide an acceptable bid bond by the close of business on the next business day following notification by DFCM of submission of a defective bid bond security. **NOTE: A cashier's check cannot be used as a substitute for a bid bond.**

## 3. Contract and Bond

The Contractor's Agreement will be in the form found in the specifications. The Contract Time will be as indicated in the bid. The successful bidder, simultaneously with the execution of the Contract Agreement, will be required to furnish a performance bond and a payment bond, both bearing original signatures, upon the forms provided in the procurement documents. The performance and payment bonds shall be for an amount equal to one hundred percent (100%) of the contract sum and secured from a company that meets the requirements specified in the requisite forms. Any bonding requirements for subcontractors will be specified in the Supplementary General Conditions.



**4. Listing of Subcontractors**

Listing of Subcontractors shall be as summarized in the “Instructions and Subcontractor’s List Form”, which are included as part of these Contract Documents. The Subcontractors List shall be delivered to DFCM or faxed to DFCM at (801)538-3677 within 24 hours of the bid opening. Requirements for listing additional subcontractors will be listed in the Contract Documents.

DFCM retains the right to audit or take other steps necessary to confirm compliance with requirements for the listing and changing of subcontractors. Any contractor who is found to not be in compliance with these requirements is subject to a debarment hearing and may be debarred from consideration for award of contracts for a period of up to three years.

**5. Interpretation of Drawings and Specifications**

If any person or entity contemplating submitting a bid is in doubt as to the meaning of any part of the drawings, specifications or other Contract Documents, such person shall submit to the DFCM Project Manager a request for an interpretation thereof. The person or entity submitting the request will be responsible for its prompt delivery. Any interpretation of the proposed documents will be made only by addenda posted on DFCM’s web site at <http://dfcm.utah.gov>. Neither the DFCM nor A/E will be responsible for any other explanations or interpretations of the proposed documents. A/E shall be deemed to refer to the architect or engineer hired by DFCM as the A/E or Consultant for the Project.

**6. Addenda**

Addenda will be posted on DFCM’s web site at <http://dfcm.utah.gov>. Contractors are responsible for obtaining information contained in each addendum from the web site. Addenda issued prior to the submittal deadline shall become part of the bidding process and must be acknowledged on the bid form. Failure to acknowledge addenda may result in disqualification from bidding.

**7. Award of Contract**

The Contract will be awarded as soon as possible to the lowest, responsive and responsible bidder, based on the lowest combination of base bid and acceptable prioritized alternates, provided the bid is reasonable, is in the interests of the State of Utah to accept and after applying the Utah Preference Laws in U.C.A. Title 63, Chapter 56. DFCM reserves the right to waive any technicalities or formalities in any bid or in the bidding. Alternates will be accepted on a prioritized basis with Alternate 1 being highest priority, Alternate 2 having second priority, etc.

**8. DFCM Contractor Performance Rating**

As a contractor completes each DFCM project, DFCM, the architect/engineer and the using agency will evaluate project performance based on the enclosed “DFCM Contractor Performance Rating” form. The ratings issued on this project will not affect this project but may affect the award on future projects.

**9. Licensure**

The Contractor shall comply with and require all of its subcontractors to comply with the license laws as required by the State of Utah.

**10. Right to Reject Bids**

DFCM reserves the right to reject any or all Bids.

**11. Time is of the Essence**

Time is of the essence in regard to all the requirements of the Contract Documents.

**12. Withdrawal of Bids**

Bids may be withdrawn on written request received from bidder prior to the time fixed for opening. Negligence on the part of the bidder in preparing the bid confers no right for the withdrawal of the bid after it has been opened.

**13. Product Approvals**

Where reference is made to one or more proprietary products in the Contract Documents, but restrictive descriptive materials of one or more manufacturer(s) is referred to in the Contract Documents, the products of other manufacturers will be accepted, provided they equal or exceed the standards set forth in the drawings and specifications and are compatible with the intent and purpose of the design, subject to the written approval of the A/E. Such written approval must occur prior to the deadline established for the last scheduled addenda to be issued. The A/E's written approval will be in an issued addendum. If the descriptive material is not restrictive, the products of other manufacturers specified will be accepted without prior approval provided they are compatible with the intent and purpose of the design as determined by the A/E.

**14. Financial Responsibility of Contractors, Subcontractors and Sub-subcontractors**

Contractors shall respond promptly to any inquiry in writing by DFCM to any concern of financial responsibility of the contractor, subcontractor or sub-subcontractor.

**15. Debarment**

By submitting a bid, the Contractor certifies that neither it nor its principals, including project and site managers, have been, or are under consideration for, debarment or suspension, or any action that would exclude such from participation in a construction contract by any governmental department or agency. If the Contractor cannot certify this statement, attach to the bid a detailed written explanation which must be reviewed and approved by DFCM as part of the requirements for award of the Project.

## BID BOND

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

### KNOW ALL PERSONS BY THESE PRESENTS:

That \_\_\_\_\_ hereinafter referred to as the "Principal," and \_\_\_\_\_, a corporation organized and existing under the laws of the State of \_\_\_\_\_, with its principal office in the City of \_\_\_\_\_ and authorized to transact business in this State and U. S. Department of the Treasury Listed, (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the STATE OF UTAH, hereinafter referred to as the "Obligee," in the amount of \$ \_\_\_\_\_ (5% of the accompanying bid), being the sum of this Bond to which payment the Principal and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

**THE CONDITION OF THIS OBLIGATION IS SUCH** that whereas the Principal has submitted to Obligee the accompanying bid incorporated by reference herein, dated as shown, to enter into a contract in writing for the \_\_\_\_\_ Project.

**NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH**, that if the said principal does not execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the principal, then the sum of the amount stated above will be forfeited to the State of Utah as liquidated damages and not as a penalty; if the said principal shall execute a contract and give bond to be approved by the Obligee for the faithful performance thereof within ten (10) days after being notified in writing of such contract to the Principal, then this obligation shall be null and void. It is expressly understood and agreed that the liability of the Surety for any and all defaults of the Principal hereunder shall be the full penal sum of this Bond. The Surety, for value received, hereby stipulates and agrees that obligations of the Surety under this Bond shall be for a term of sixty (60) days from actual date of the bid opening.

**PROVIDED, HOWEVER**, that this Bond is executed pursuant to provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to same extent as if it were copied at length herein.

**IN WITNESS WHEREOF**, the above bounden parties have executed this instrument under their several seals on the date indicated below, the name and corporate seal of each corporate party being hereto affixed and these presents duly signed by its undersigned representative, pursuant to authority of its governing body.

**DATED** this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

**Principal's name and address (if other than a corporation):**

\_\_\_\_\_  
\_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_

**Principal's name and address (if a corporation):**

\_\_\_\_\_  
\_\_\_\_\_

By: \_\_\_\_\_

Title: \_\_\_\_\_  
(Affix Corporate Seal)

**Surety's name and address:**

\_\_\_\_\_  
\_\_\_\_\_

STATE OF \_\_\_\_\_ )  
COUNTY OF \_\_\_\_\_ ) ss.

By: \_\_\_\_\_  
Attorney-in-Fact (Affix Corporate Seal)

On this \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me \_\_\_\_\_, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

My Commission Expires: \_\_\_\_\_

Resides at: \_\_\_\_\_

Agency: \_\_\_\_\_  
Agent: \_\_\_\_\_  
Address: \_\_\_\_\_  
Phone: \_\_\_\_\_

NOTARY PUBLIC

Approved As To Form: May 25, 2005  
By Alan S. Bachman, Asst Attorney General

**Division of Facilities Construction and****INSTRUCTIONS AND SUBCONTRACTORS LIST FORM**

The three low bidders, as well as all other bidders that desire to be considered, are required by law to submit to DFCM within 24 hours of bid opening a list of **ALL** first-tier subcontractors, including the subcontractor's name, bid amount and other information required by Building Board Rule and as stated in these Contract Documents, on the following basis:

**PROJECTS UNDER \$500,000 - ALL SUBS \$20,000 OR OVER MUST BE LISTED**  
**PROJECTS \$500,000 OR MORE - ALL SUBS \$35,000 OR OVER MUST BE LISTED**

- Any additional subcontractors identified in the bid documents shall also be listed.
- The DFCM Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law.
- List subcontractors for base bid as well as the impact on the list that the selection of any alternate may have.
- Bidder may not list more than one subcontractor to perform the same work.
- Bidder must list "Self" if performing work itself.

**LICENSURE:**

The subcontractor's name, the type of work, the subcontractor's bid amount, and the subcontractor's license number as issued by DOPL, if such license is required under Utah Law, shall be listed. Bidder shall certify that all subcontractors, required to be licensed, are licensed as required by State law. A subcontractor includes a trade contractor or specialty contractor and does not include suppliers who provide only materials, equipment, or supplies to a contractor or subcontractor.

**BIDDER LISTING 'SELF' AS PERFORMING THE WORK:**

Any bidder that is properly licensed for the particular work and intends to perform that work itself in lieu of a subcontractor that would otherwise be required to be on the subcontractor list, must insert the term 'Self' for that category on the subcontractor list form. Any listing of 'Self' on the sublist form shall also include the amount allocated for that work.

**'SPECIAL EXCEPTION':**

A bidder may list 'Special Exception' in place of a subcontractor when the bidder intends to obtain a subcontractor to perform the work at a later date because the bidder was unable to obtain a qualified or reasonable bid under the provisions of U.C.A. Section 63A-5-208(4). The bidder shall insert the term 'Special Exception' for that category of work, and shall provide documentation with the subcontractor list describing the bidder's efforts to obtain a bid of a qualified subcontractor at a reasonable cost and why the bidder was unable to obtain a qualified subcontractor bid. The Director must find that the bidder complied in good faith with State law requirements for any 'Special Exception' designation, in order for the bid to be considered. If awarded the contract, the Director shall supervise the bidder's efforts to obtain a qualified subcontractor bid. The amount of the awarded contract may not be adjusted to reflect the actual amount of the subcontractor's bid. Any listing of 'Special Exception' on the sublist form shall also include amount allocated for that work.

**INSTRUCTIONS AND SUBCONTRACTORS LIST FORM**  
**Page No. 2**

**GROUND FOR DISQUALIFICATION:**

The Director may not consider any bid submitted by a bidder if the bidder fails to submit a subcontractor list meeting the requirements of State law. Director may withhold awarding the contract to a particular bidder if one or more of the proposed subcontractors are considered by the Director to be unqualified to do the Work or for such other reason in the best interest of the State of Utah. Notwithstanding any other provision in these instructions, if there is a good faith error on the sublist form, at the sole discretion of the Director, the Director may provide notice to the contractor and the contractor shall have 24 hours to submit the correction to the Director. If such correction is submitted timely, then the sublist requirements shall be considered met.

**CHANGES OF SUBCONTRACTORS SPECIFICALLY IDENTIFIED ON SUBLIST FORM:**

Subsequent to twenty-four hours after the bid opening, the contractor may change its listed subcontractors only after receiving written permission from the Director based on complying with all of the following criteria.

- (1) The contractor has established in writing that the change is in the best interest of the State and that the contractor establishes an appropriate reason for the change, which may include, but not is not limited to, the following reasons: the original subcontractor has failed to perform, or is not qualified or capable of performing, and/or the subcontractor has requested in writing to be released.
- (2) The circumstances related to the request for the change do not indicate any bad faith in the original listing of the subcontractors.
- (3) Any requirement set forth by the Director to ensure that the process used to select a new subcontractor does not give rise to bid shopping.
- (4) Any increase in the cost of the subject subcontractor work is borne by the contractor.
- (5) Any decrease in the cost of the subject subcontractor work shall result in a deductive change order being issued for the contract for such decreased amount.
- (6) The Director will give substantial weight to whether the subcontractor has consented in writing to being removed unless the Contractor establishes that the subcontractor is not qualified for the work.

**EXAMPLE:**

Example of a list where there are only four subcontractors:

TYPE OF WORK	SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION"	SUBCONTRACTOR BID AMOUNT	CONT. LICENSE #
ELECTRICAL	ABCD Electric Inc.	\$350,000.00	123456789000
LANDSCAPING	"Self"	300,000.00	123456789000
CONCRETE (ALTERNATE #1)	XYZ Concrete Inc	298,000.00	987654321000
MECHANICAL	"Special Exception" (attach documentation)	Fixed at: 350,000.00	(TO BE PROVIDED AFTER OBTAINING SUBCONTRACTOR)

**PURSUANT TO STATE LAW - SUBCONTRACTOR BID AMOUNTS CONTAINED IN THIS  
SUBCONTRACTOR LIST SHALL NOT BE DISCLOSED UNTIL THE CONTRACT HAS BEEN AWARDED.**

**SUBCONTRACTORS LIST**

FAX TO 801-538-3677

PROJECT TITLE: \_\_\_\_\_

Caution: You must read and comply fully with instructions.

TYPE OF WORK	SUBCONTRACTOR, "SELF" OR "SPECIAL EXCEPTION"	SUBCONTRACTOR BID AMOUNT	CONT. LICENSE #

We certify that:

1. This list includes all subcontractors as required by the instructions, including those related to the base bid as well as any alternates.
2. We have listed "Self" or "Special Exception" in accordance with the instructions.
3. All subcontractors are appropriately licensed as required by State law.

FIRM: \_\_\_\_\_

DATE: \_\_\_\_\_

SIGNED BY: \_\_\_\_\_

**NOTICE:** FAILURE TO SUBMIT THIS FORM, PROPERLY COMPLETED AND SIGNED, AS REQUIRED IN THESE CONTRACT DOCUMENTS, SHALL BE GROUNDS FOR DFCMS REFUSAL TO ENTER INTO A WRITTEN CONTRACT WITH BIDDER. ACTION MAY BE TAKEN AGAINST BIDDERS BID BOND AS DEEMED APPROPRIATE BY DFCM. ATTACH A SECOND PAGE IF NECESSARY.

# **FUGITIVE DUST PLAN**

The Contractor will fill out the form and file the original with the Division of Air Quality and a copy of the form with the Division of Facilities Construction & Management, prior to the issuance of any notice to proceed.

The Contractor will be fully responsible for compliance with the Fugitive Dust Control Plan, including the adequacy of the plan, any damages, fines, liability, and penalty or other action that results from noncompliance.



**Utah Division of Air Quality**

*April 20, 1999*

**GUIDANCE THAT MUST BE CONSIDERED IN DEVELOPING AND SUBMITTING A  
DUST CONTROL PLAN FOR COMPLIANCE WITH R307-309-3, 4, 5, 6, 7**

Source Information:

1. Name of your operation (source): provide a name if the source is a construction site.
2. Address or location of your operation or construction site.
3. UTM coordinates or Longitude/Latitude of stationary emission points at your operation.
4. Lengths of the project, if temporary (time period).
5. Description of process (include all sources of dust and fugitive dust). Please, if necessary, use additional sheets of paper for this description. Be sure to mark it as an attachment.
6. Type of material processed or disturbed.
7. Amount of material processed (tons per year, tons per month, lbs./hr., and applicable units).

8. Destination of product (where will the material produced be used or transported, be specific, provide address or specific location), information needed for temporary relocation applicants.
9. Identify the individual who is responsible for the implementation and maintenance of fugitive dust control measures. List name(s), position(s) and telephone number(s).
10. List, and attach copies of any contract lease, liability agreement with other companies that may, or will, be responsible for dust control on site or on the project.

**Description of Fugitive Dust Emission Activities**  
**(Things to consider in addressing fugitive dust control strategies.)**

1. Type of activities (drilling and blasting, road construction, development construction, earth moving and excavation, handling and hauling materials, cleaning and leveling, etc).
2. List type of equipment generating the fugitive dust.
3. Diagram the location of each activity or piece of equipment on site. Please attach the diagram.
4. Provide pictures or drawings of each activity. Include a drawing of the unpaved/paved road network used to move loads “on” and “off” property.
5. Vehicle miles travels on unpaved roads associated with the activity (average speed).
6. Type of dust emitted at each source (coal, cement, sand, soil, clay, dust, etc.)
7. Estimate the size of the release area at which the activity occurs (square miles). For haul or dirt roads include total miles of road in use during the activity.

## **Description of Fugitive Dust Emission Controls on Site**

Control strategies must be designed to meet 20% opacity or less on site (a lesser opacity may be defined by Approval Order conditions or federal requirements such as NSPS), and control strategies must prevent exceeding 10% opacity from fugitive dust at the property boundary (site boundary) for compliance with R307-309-3.

1. Types of ongoing emission controls proposed for each activity, each piece of equipment, and haul roads.
2. Types of additional dust controls proposed for bare, exposed surfaces (chemical stabilization, synthetic cover, wind breaks, vegetative cover, etc).
3. Method of application of dust suppressant.
4. Frequency of application of dust suppressant.
5. Explain what triggers the use of a special control measure other than routine measures already in place, such as covered loads or measures covered by a permit condition (increase in opacity, high winds, citizen complaints, dry conditions, etc).
6. Explain in detail what control strategies/measures will be implemented off-hours, i.e., Saturdays/Sundays/Holidays, as well as 6 PM to 6 AM each day.

## **Description of Fugitive Dust Control Off-site**

Prevent, to the maximum extent possible, deposition of materials, which may create fugitive dust on public and private paved roads in compliance with R307-309-5, 6, 7.

1. Types of emission controls initiated by your operation that are in place “off” property (application of water, covered loads, sweeping roads, vehicle cleaning, etc.).
  
2. Proposed remedial controls that will be initiated promptly if materials, which may create fugitive dust, are deposited on public and private paved roads.

Submit the Dust Control Plan to:

Executive Secretary  
Utah Air Quality Board  
POB 144820  
15 North 1950 West  
Salt Lake City, Utah 84114-4820

Phone: (801) 536-4000  
FAX: (801) 536-4099

## **Fugitive Dust Control Plan Violation Report**

When a source is found in violation of R307-309-3 or in violation of the Fugitive Dust Control Plan, the source must submit a report to the Executive Secretary within 15 days after receiving a Notice of Violation. The report must include the following information:

1. Name and address of dust source.
2. Time and duration of dust episode.
3. Meteorological conditions during the dust episode.
4. Total number and type of fugitive dust activities and dust producing equipment within each operation boundary. If no change has occurred from the existing dust control plan, the source should state that the activity/equipment is the same.
5. Fugitive dust activities or dust producing equipment that caused a violation of R-307-309-3 or the source's dust control plan.
6. Reasons for failing to control dust from the dust generating activity or equipment.
7. New and/or additional fugitive dust control strategies necessary to achieve compliance with R307-309-3, 4, 5, 6, or 7.
8. If it can not be demonstrated that the current approved Dust Control Plan can result in compliance with R307-309-3 through 7, the Dust Control Plan must be revised so as to demonstrate compliance with 307-309-3 through 7. Within 30 days of receiving a fugitive dust Notice of Violation, the source must submit the revised Plan to the Executive Secretary for review and approval.

Submit the Dust Control Plan to:

Executive Secretary	Phone: (801) 536-4000
Utah Air Quality Board	FAX: (801) 536-4099
POB 144820	
15 North 1950 West	
Salt Lake City, Utah 84114-4820	

Attachments: DFCM Form FDR R-307-309, Rule 307-309

## CONTRACTOR'S AGREEMENT

FOR:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

THIS CONTRACTOR'S AGREEMENT, made and entered into this \_\_\_\_ day of \_\_\_\_\_, 20\_\_, by and between the DIVISION OF FACILITIES CONSTRUCTION AND MANAGEMENT, hereinafter referred to as "DFCM", and \_\_\_\_\_, incorporated in the State of \_\_\_\_\_ and authorized to do business in the State of Utah, hereinafter referred to as "Contractor", whose address is \_\_\_\_\_.

WITNESSETH: WHEREAS, DFCM intends to have Work performed at \_\_\_\_\_.

WHEREAS, Contractor agrees to perform the Work for the sum stated herein.

NOW, THEREFORE, DFCM and Contractor for the consideration provided in this Contractor's Agreement, agree as follows:

**ARTICLE 1. SCOPE OF WORK.** The Work to be performed shall be in accordance with the Contract Documents prepared by \_\_\_\_\_ and entitled "\_\_\_\_\_"

The DFCM General Conditions ("General Conditions") dated May 25, 2005 on file at the office of DFCM and available on the DFCM website, are hereby incorporated by reference as part of this Agreement and are included in the specifications for this Project. All terms used in this Contractor's Agreement shall be as defined in the Contract Documents, and in particular, the General Conditions.

The Contractor Agrees to furnish labor, materials and equipment to complete the Work as required in the Contract Documents which are hereby incorporated by reference. It is understood and agreed by the parties hereto that all Work shall be performed as required in the Contract Documents and shall be subject to inspection and approval of DFCM or its authorized representative. The relationship of the Contractor to the DFCM hereunder is that of an independent Contractor.

**ARTICLE 2. CONTRACT SUM.** The DFCM agrees to pay and the Contractor agrees to accept in full performance of this Contractor's Agreement, the sum of \_\_\_\_\_ DOLLARS AND NO CENTS (\$\_\_\_\_\_.00), which is the base bid, and which sum also includes the cost of a 100% Performance Bond and a 100%

CONTRACTOR'S AGREEMENT  
PAGE NO. 2

Payment Bond as well as all insurance requirements of the Contractor. Said bonds have already been posted by the Contractor pursuant to State law. The required proof of insurance certificates have been delivered to DFCM in accordance with the General Conditions before the execution of this Contractor's Agreement.

**ARTICLE 3. TIME OF COMPLETION AND DELAY REMEDY.** The Work shall be Substantially Complete by \_\_\_\_\_. Contractor agrees to pay liquidated damages in the amount of \$\_\_\_\_\_ per day for each day after expiration of the Contract Time until the Contractor achieves Substantial Completion in accordance with the Contract Documents, if Contractor's delay makes the damages applicable. The provision for liquidated damages is: (a) to compensate the DFCM for delay only; (b) is provided for herein because actual damages can not be readily ascertained at the time of execution of this Contractor's Agreement; (c) is not a penalty; and (d) shall not prevent the DFCM from maintaining Claims for other non-delay damages, such as costs to complete or remedy defective Work.

No action shall be maintained by the Contractor, including its or Subcontractor or suppliers at any tier, against the DFCM or State of Utah for damages or other claims due to losses attributable to hindrances or delays from any cause whatsoever, including acts and omissions of the DFCM or its officers, employees or agents, except as expressly provided in the General Conditions. The Contractor may receive a written extension of time, signed by the DFCM, in which to complete the Work under this Contractor's Agreement in accordance with the General Conditions.

**ARTICLE 4. CONTRACT DOCUMENTS.** The Contract Documents consist of this Contractor's Agreement, the Conditions of the Contract (DFCM General Conditions, Supplementary and other Conditions), the Drawings, Specifications, Addenda and Modifications. The Contract Documents shall also include the bidding documents, including the Invitation to Bid, Instructions to Bidders/ Proposers and the Bid/Proposal, to the extent not in conflict therewith and other documents and oral presentations that are documented as an attachment to the contract.

All such documents are hereby incorporated by reference herein. Any reference in this Contractor's Agreement to certain provisions of the Contract Documents shall in no way be construed as to lessen the importance or applicability of any other provisions of the Contract Documents.

**ARTICLE 5. PAYMENT.** The DFCM agrees to pay the Contractor from time to time as the Work progresses, but not more than once each month after the date of Notice to Proceed, and only upon Certificate of the A/E for Work performed during the preceding calendar month, ninety-five percent (95%) of the value of the labor performed and ninety-five percent (95%) of the value of materials furnished in place or on the site. The Contractor agrees to furnish to the DFCM invoices for materials purchased and on the site but not installed, for which the Contractor requests payment and agrees to



CONTRACTOR'S AGREEMENT  
PAGE NO. 3

safeguard and protect such equipment or materials and is responsible for safekeeping thereof and if such be stolen, lost or destroyed, to replace same.

Such evidence of labor performed and materials furnished as the DFCM may reasonably require shall be supplied by the Contractor at the time of request for Certificate of Payment on account. Materials for which payment has been made cannot be removed from the job site without DFCM's written approval. Five percent (5%) of the earned amount shall be retained from each monthly payment. The retainage, including any additional retainage imposed and the release of any retainage, shall be in accordance with UCA 13-8-5 as amended. Contractor shall also comply with the requirements of UCA 13-8-5, including restrictions of retainage regarding subcontractors and the distribution of interest earned on the retention proceeds. The DFCM shall not be responsible for enforcing the Contractor's obligations under State law in fulfilling the retention law requirements with subcontractors at any tier.

**ARTICLE 6. INDEBTEDNESS.** Before final payment is made, the Contractor must submit evidence satisfactory to the DFCM that all payrolls, materials bills, subcontracts at any tier and outstanding indebtedness in connection with the Work have been properly paid. Final Payment will be made after receipt of said evidence, final acceptance of the Work by the DFCM as well as compliance with the applicable provisions of the General Conditions.

Contractor shall respond immediately to any inquiry in writing by DFCM as to any concern of financial responsibility and DFCM reserves the right to request any waivers, releases or bonds from Contractor in regard to any rights of Subcontractors (including suppliers) at any tier or any third parties prior to any payment by DFCM to Contractor.

**ARTICLE 7. ADDITIONAL WORK.** It is understood and agreed by the parties hereto that no money will be paid to the Contractor for additional labor or materials furnished unless a new contract in writing or a Modification hereof in accordance with the General Conditions and the Contract Documents for such additional labor or materials has been executed. The DFCM specifically reserves the right to modify or amend this Contractor's Agreement and the total sum due hereunder either by enlarging or restricting the scope of the Work.

**ARTICLE 8. INSPECTIONS.** The Work shall be inspected for acceptance in accordance with the General Conditions.

**ARTICLE 9. DISPUTES.** Any dispute, PRE or Claim between the parties shall be subject to the provisions of Article 7 of the General Conditions. DFCM reserves all rights to pursue its rights and remedies as provided in the General Conditions.

**ARTICLE 10. TERMINATION, SUSPENSION OR ABANDONMENT.** This Contractor's Agreement may be terminated, suspended or abandoned in accordance with the General Conditions.

**ARTICLE 11. DFCM'S RIGHT TO WITHHOLD CERTAIN AMOUNT AND MAKE USE THEREOF.** The DFCM may withhold from payment to the Contractor such amount as, in DFCM's judgment, may be necessary to pay just claims against the Contractor or Subcontractor at any tier for labor and services rendered and materials furnished in and about the Work. The DFCM may apply such withheld amounts for the payment of such claims in DFCM's discretion. In so doing, the DFCM shall be deemed the agent of Contractor and payment so made by the DFCM shall be considered as payment made under this Contractor's Agreement by the DFCM to the Contractor. DFCM shall not be liable to the Contractor for any such payment made in good faith. Such withholdings and payments may be made without prior approval of the Contractor and may be also be prior to any determination as a result of any dispute, PRE, Claim or litigation.

**ARTICLE 12. INDEMNIFICATION.** The Contractor shall comply with the indemnification provisions of the General Conditions.

**ARTICLE 13. SUCCESSORS AND ASSIGNMENT OF CONTRACT.** The DFCM and Contractor, respectively bind themselves, their partners, successors, assigns and legal representatives to the other party to this Agreement, and to partners, successors, assigns and legal representatives of such other party with respect to all covenants, provisions, rights and responsibilities of this Contractor's Agreement. The Contractor shall not assign this Contractor's Agreement without the prior written consent of the DFCM, nor shall the Contractor assign any moneys due or to become due as well as any rights under this Contractor's Agreement, without prior written consent of the DFCM.

**ARTICLE 14. RELATIONSHIP OF THE PARTIES.** The Contractor accepts the relationship of trust and confidence established by this Contractor's Agreement and covenants with the DFCM to cooperate with the DFCM and A/E and use the Contractor's best skill, efforts and judgment in furthering the interest of the DFCM; to furnish efficient business administration and supervision; to make best efforts to furnish at all times an adequate supply of workers and materials; and to perform the Work in the best and most expeditious and economic manner consistent with the interests of the DFCM.

**ARTICLE 15. AUTHORITY TO EXECUTE AND PERFORM AGREEMENT.** Contractor and DFCM each represent that the execution of this Contractor's Agreement and the performance thereunder is within their respective duly authorized powers.

**ARTICLE 16. ATTORNEY FEES AND COSTS.** Except as otherwise provided in the dispute resolution provisions of the General Conditions, the prevailing party shall be entitled to reasonable attorney fees and costs incurred in any action in the District Court and/or appellate body to enforce this Contractor's Agreement or recover damages or any other action as a result of a breach thereof.

CONTRACTOR'S AGREEMENT  
PAGE NO. 5

**IN WITNESS WHEREOF**, the parties hereto have executed this Contractor's Agreement on the day and year stated hereinabove.

**CONTRACTOR:** \_\_\_\_\_

\_\_\_\_\_  
Signature Date

Title: \_\_\_\_\_

State of \_\_\_\_\_)

County of \_\_\_\_\_)

\_\_\_\_\_  
Please type/print name clearly

On this \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me, \_\_\_\_\_, whose identity is personally known to me (or proved to me on the basis of satisfactory evidence) and who by me duly sworn (or affirmed), did say that he (she) is the \_\_\_\_\_ (title or office) of the firm and that said document was signed by him (her) in behalf of said firm.

(SEAL)

\_\_\_\_\_  
**Notary Public**

My Commission Expires \_\_\_\_\_

APPROVED AS TO AVAILABILITY  
OF FUNDS:

\_\_\_\_\_  
David D. Williams, Jr. Date  
DFCM Administrative Services Director

**DIVISION OF FACILITIES  
CONSTRUCTION AND MANAGEMENT**

\_\_\_\_\_  
- Manager Date  
Capital Development/Improvements

APPROVED AS TO FORM:  
ATTORNEY GENERAL  
November 30, 2006  
By: Alan S. Bachman  
Asst Attorney General

APPROVED FOR EXPENDITURE:

\_\_\_\_\_  
Division of Finance Date

**PERFORMANCE BOND**  
(Title 63, Chapter 56, U. C. A. 1953, as Amended)

That \_\_\_\_\_ hereinafter referred to as the "Principal" and \_\_\_\_\_, a corporation organized and existing under the laws of the State of \_\_\_\_\_, with its principal office in the City of \_\_\_\_\_ and authorized to transact business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah, hereinafter referred to as the "Obligee," in the amount of \_\_\_\_\_ DOLLARS (\$ \_\_\_\_\_) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

**WHEREAS**, the Principal has entered into a certain written Contract with the Obligee, dated the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, to construct \_\_\_\_\_ in the County of \_\_\_\_\_, State of Utah, Project No. \_\_\_\_\_, for the approximate sum of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_), which Contract is hereby incorporated by reference herein.

**NOW, THEREFORE**, the condition of this obligation is such that if the said Principal shall faithfully perform the Contract in accordance with the Contract Documents including, but not limited to, the Plans, Specifications and conditions thereof, the one year performance warranty, and the terms of the Contract as said Contract may be subject to Modifications or changes, then this obligation shall be void; otherwise it shall remain in full force and effect.

No right of action shall accrue on this bond to or for the use of any person or corporation other than the state named herein or the heirs, executors, administrators or successors of the Owner.

The parties agree that the dispute provisions provided in the Contract Documents apply and shall constitute the sole dispute procedures of the parties.

**PROVIDED, HOWEVER**, that this Bond is executed pursuant to the Provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

**IN WITNESS WHEREOF**, the said Principal and Surety have signed and sealed this instrument this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

**WITNESS OR ATTESTATION:**

**PRINCIPAL:**

\_\_\_\_\_

\_\_\_\_\_

By: \_\_\_\_\_

(Seal)

Title: \_\_\_\_\_

**WITNESS OR ATTESTATION:**

**SURETY:**

\_\_\_\_\_

\_\_\_\_\_

By: \_\_\_\_\_

Attorney-in-Fact (Seal)

STATE OF \_\_\_\_\_ )  
 ) ss.  
COUNTY OF \_\_\_\_\_ )

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me \_\_\_\_\_, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney in-fact of the above-named Surety Company and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

My commission expires: \_\_\_\_\_

Resides at: \_\_\_\_\_

\_\_\_\_\_  
NOTARY PUBLIC

**Agency:** \_\_\_\_\_  
**Agent:** \_\_\_\_\_  
**Address:** \_\_\_\_\_  
**Phone:** \_\_\_\_\_

Approved As To Form: May 25, 2005  
By Alan S. Bachman, Asst Attorney General

# PAYMENT BOND

(Title 63, Chapter 56, U. C. A. 1953, as Amended)

## KNOW ALL PERSONS BY THESE PRESENTS:

That \_\_\_\_\_ hereinafter referred to as the "Principal," and \_\_\_\_\_, a corporation organized and existing under the laws of the State of \_\_\_\_\_ authorized to do business in this State and U. S. Department of the Treasury Listed (Circular 570, Companies Holding Certificates of Authority as Acceptable Securities on Federal Bonds and as Acceptable Reinsuring Companies); with its principal office in the City of \_\_\_\_\_, hereinafter referred to as the "Surety," are held and firmly bound unto the State of Utah hereinafter referred to as the "Obligee," in the amount of \_\_\_\_\_ Dollars (\$) for the payment whereof, the said Principal and Surety bind themselves and their heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

**WHEREAS**, the Principal has entered into a certain written Contract with the Obligee, dated the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, to construct \_\_\_\_\_ in the County of \_\_\_\_\_, State of Utah, Project No. \_\_\_\_\_ for the approximate sum of \_\_\_\_\_ Dollars (\$ \_\_\_\_\_), which contract is hereby incorporated by reference herein.

**NOW, THEREFORE**, the condition of this obligation is such that if the said Principal shall pay all claimants supplying labor or materials to Principal or Principal's Subcontractors in compliance with the provisions of Title 63, Chapter 56, of Utah Code Annotated, 1953, as amended, and in the prosecution of the Work provided for in said Contract, then, this obligation shall be void; otherwise it shall remain in full force and effect.

That said Surety to this Bond, for value received, hereby stipulates and agrees that no changes, extensions of time, alterations or additions to the terms of the Contract or to the Work to be performed thereunder, or the specifications or drawings accompanying same shall in any way affect its obligation on this Bond, and does hereby waive notice of any such changes, extensions of time, alterations or additions to the terms of the Contract or to the Work or to the specifications or drawings and agrees that they shall become part of the Contract Documents.

**PROVIDED, HOWEVER**, that this Bond is executed pursuant to the provisions of Title 63, Chapter 56, Utah Code Annotated, 1953, as amended, and all liabilities on this Bond shall be determined in accordance with said provisions to the same extent as if it were copied at length herein.

**IN WITNESS WHEREOF**, the said Principal and Surety have signed and sealed this instrument this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

## WITNESS OR ATTESTATION:

\_\_\_\_\_

## PRINCIPAL:

\_\_\_\_\_

By: \_\_\_\_\_ (Seal)

Title: \_\_\_\_\_

## WITNESS OR ATTESTATION:

\_\_\_\_\_

## SURETY:

\_\_\_\_\_

By: \_\_\_\_\_ Attorney-in-Fact (Seal)

STATE OF \_\_\_\_\_ )  
 ) ss.  
COUNTY OF \_\_\_\_\_ )

On this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, personally appeared before me \_\_\_\_\_, whose identity is personally known to me or proved to me on the basis of satisfactory evidence, and who, being by me duly sworn, did say that he/she is the Attorney-in-fact of the above-named Surety Company, and that he/she is duly authorized to execute the same and has complied in all respects with the laws of Utah in reference to becoming sole surety upon bonds, undertakings and obligations, and that he/she acknowledged to me that as Attorney-in-fact executed the same.

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_.

My commission expires: \_\_\_\_\_

Resides at: \_\_\_\_\_

NOTARY PUBLIC

Agency: \_\_\_\_\_  
Agent: \_\_\_\_\_  
Address: \_\_\_\_\_  
Phone: \_\_\_\_\_

Approved As To Form: May 25, 2005  
By Alan S. Bachman, Asst Attorney General



## Division of Facilities Construction and Management

## CHANGE ORDER # \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

AGENCY OR INSTITUTION: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

PROJECT NUMBER: \_\_\_\_\_

CONTRACT NUMBER: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

DATE: \_\_\_\_\_

CONSTRUCTION CHANGE DIRECTIVE NO.	PROPOSAL REQUEST NO.	AMOUNT		DAYS	
		INCREASE	DECREASE	INCREASE	DECREASE

	Amount	Days	Date
ORIGINAL CONTRACT			
TOTAL PREVIOUS CHANGE ORDERS			
TOTAL THIS CHANGE ORDER			
ADJUSTED CONTRACT			

DFCM and Contractor agree that the terms, contract sum, scope of the Work and time specified in this Change Order shall constitute the full accord and satisfaction, and complete adjustment to the Contract and includes all direct and indirect costs and effects related to, incidental to, and/or reasonably implied from such change in the contract terms, sum, scope of the Work and time.

Contractor: \_\_\_\_\_

Date

Architect/Engineer: \_\_\_\_\_

Date

Agency or Institution: \_\_\_\_\_

Date

DFCM: \_\_\_\_\_

Date

Funding Verification: \_\_\_\_\_

Date

Page \_\_\_\_ of \_\_\_\_ page(s)

30

# CERTIFICATE OF SUBSTANTIAL COMPLETION

PROJECT \_\_\_\_\_ PROJECT NO: \_\_\_\_\_  
AGENCY/INSTITUTION \_\_\_\_\_

AREA ACCEPTED

The Work performed under the subject Contract has been reviewed on this date and found to be Substantially Completed as defined in the General Conditions; including that the construction is sufficiently completed in accordance with the Contract Documents, as modified by any change orders agreed to by the parties, so that the State of Utah can occupy the Project or specified area of the Project for the use for which it is intended.

The DFCM - (Owner) accepts the Project or specified area of the Project as Substantially Complete and will assume full possession of the Project or specified area of the Project at \_\_\_\_\_ (time) on \_\_\_\_\_ (date).

The DFCM accepts the Project for occupancy and agrees to assume full responsibility for maintenance and operation, including utilities and insurance, of the Project subject to the itemized responsibilities and/or exceptions noted below:

The Owner acknowledges receipt of the following closeout and transition materials:

- ☐ As-built Drawings      ☐ O & M Manuals      ☐ Warranty Documents      ☐ Completion of Training Requirements

A list of items to be completed or corrected (Punch List) is attached hereto. The failure to include an item on it does not alter the responsibility of the Contractor to complete all the Work in accordance with the Contract Documents, including authorized changes thereof. The amount of \_\_\_\_\_ (Twice the value of the punch list work) shall be retained to assure the completion of the punch list work.

The Contractor shall complete or correct the Work on the list of (Punch List) items appended hereto within \_\_\_\_\_ calendar days from the above date of issuance of this Certificate. The amount withheld pending completion of the list of items noted and agreed to shall be: \$ \_\_\_\_\_. If the list of items is not completed within the time allotted the Owner has the right to be compensated for the delays and/or complete the work with the help of independent contractor at the expense of the retained project funds. If the retained project funds are insufficient to cover the delay/completion damages, the Owner shall be promptly reimbursed for the balance of the funds needed to compensate the Owner.

\_\_\_\_\_  
 CONTRACTOR (include name of firm)

by: \_\_\_\_\_  
 (Signature) \_\_\_\_\_ DATE \_\_\_\_\_

\_\_\_\_\_ by: \_\_\_\_\_  
A/E (include name of firm) (Signature) DATE

by:

USING INSTITUTION OR AGENCY

(Signature)



DATE

by: \_\_\_\_\_

DFCM (Owner) (Signature) DATE

4110 State Office Building, Salt Lake City, Utah 84114 cc:  
telephone 801-538-3018 • facsimile 801-538-3267 • <http://dfcm.utah.gov>

Parties Noted  
DFCM, Director

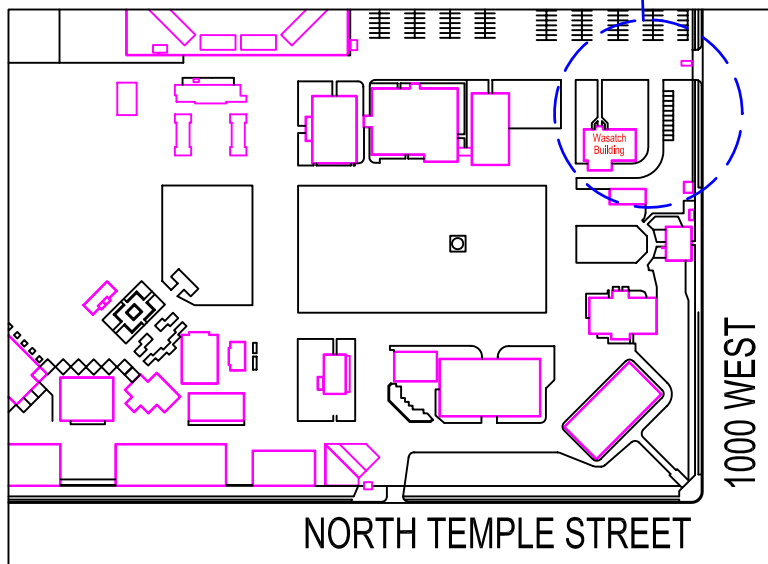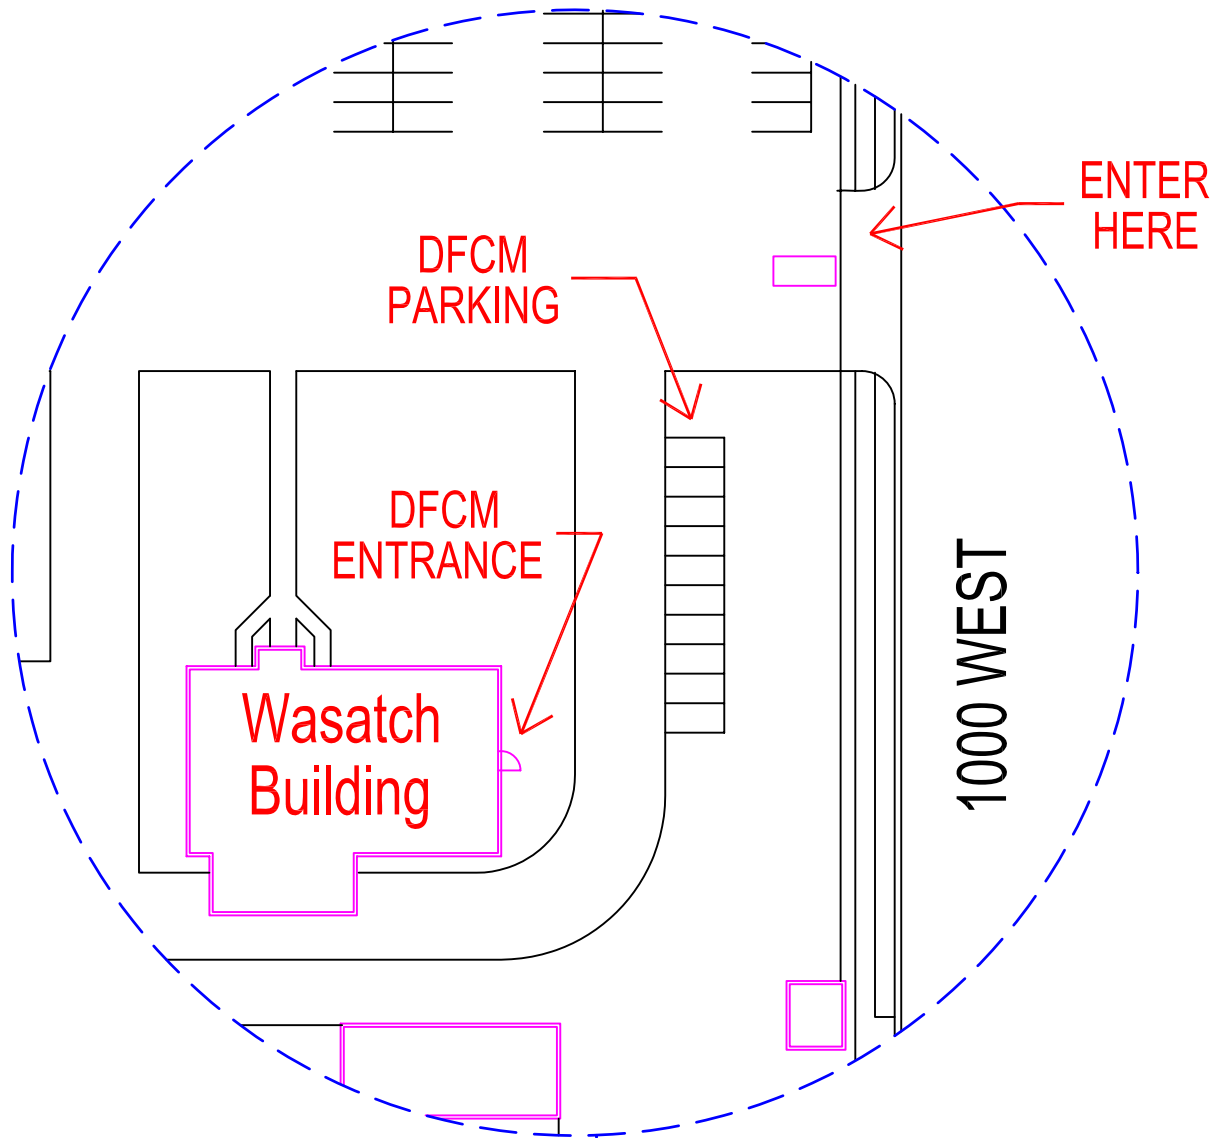

UTAH STATE  
FAIR PARK



DFCM Temporary Location



PROJECT MANUAL

2006 UDOT REGION II

ADMINISTRATION BUILDING

RE-ROOF

DFCM PROJECT #06188900

NOVEMBER 30, 2006



State of Utah—Department of Administrative Services

---

**DIVISION OF FACILITIES CONSTRUCTION  
AND MANAGEMENT**

4110 State Office Building / Salt Lake City, Utah 84114 / 538-3018



---

*"Our Success Is Measured By The Level Of Our Client's Success".*

SCOTT P. EVANS – ARCHITECT & ASSOCIATES P.C.  
108 West Center Street, Bountiful, Utah 84010  
Phone 801-298-1368 Fax 801-298-2192  
E-mail: [info@spe-architect.com](mailto:info@spe-architect.com) Web: [www.spe-architect.com](http://www.spe-architect.com)

# **CONSULTANTS**

## **ARCHITECT**

---

### **SCOTT P. EVANS – Architect & Assoc. P.C.**

108 West Center Street

Bountiful, Utah 84010

(801) 298-1368

Fax (801) 298-2192 / [info@spe-architect.com](mailto:info@spe-architect.com)



## **MECHANICAL ENGINEER**

---

### **VAN BOERUM & FRANK ASSOC.**

330 South 300 East

Salt Lake City, Utah 84111

(801) 530-3148 / [www.vbfa.com](http://www.vbfa.com)



Division .....	Section Title .....	Pages
----------------	---------------------	-------

## **DIVISION 1 - GENERAL REQUIREMENTS**

01100 .....	SUMMARY .....	1
01140 .....	WORK RESTRICTIONS .....	1
01250 .....	CONTRACT MODIFICATION PROCEDURES .....	2
01290 .....	PAYMENT PROCEDURES .....	3
01310 .....	PROJECT MANAGEMENT AND COORDINATION.....	3
01330 .....	SUBMITTAL PROCEDURES .....	5
01420 .....	REFERENCES.....	2
01500 .....	TEMPORARY FACILITIES AND CONTROLS .....	4
01600 .....	PRODUCT REQUIREMENTS .....	5
01700 .....	EXECUTION REQUIREMENTS .....	6
01731 .....	CUTTING AND PATCHING .....	3
01732 .....	SELECTIVE DEMOLITION .....	4
01770 .....	CLOSEOUT PROCEDURES .....	3
01781 .....	PROJECT RECORD DOCUMENTS .....	2

## **DIVISION 2 - SITE CONSTRUCTION**

NOT APPLICABLE

## **DIVISION 3 - CONCRETE**

NOT APPLICABLE

## **DIVISION 4 - MASONRY**

NOT APPLICABLE

## **DIVISION 5 - METALS**

05500 .....	METAL FABRICATIONS.....	7
-------------	-------------------------	---

## **DIVISION 6 - WOOD AND PLASTICS**

06100 .....	ROUGH CARPENTRY .....	5
-------------	-----------------------	---

## **DIVISION 7 - THERMAL AND MOISTURE PROTECTION**

07540 .....	THERMOPLASTIC MEMBRANE ROOFING .....	8
07620 .....	SHEET METAL FLASHING AND TRIM .....	6
07720 .....	ROOF ACCESSORIES .....	5
07920 .....	JOINT SEALANTS.....	6

## **DIVISION 8 - DOORS AND WINDOWS**

08311 .....	ACCESS DOORS AND FRAMES .....	3
-------------	-------------------------------	---

## **DIVISION 9 - FINISHES**

09912 .....	PAINTING (PROFESSIONAL LINE PRODUCTS).....	10
-------------	--	----

## **DIVISION 10 - SPECIALTIES**

NOT APPLICABLE

## **DIVISION 11 - EQUIPMENT**

NOT APPLICABLE

**DIVISION 12 - FURNISHINGS**  
NOT APPLICABLE

**DIVISION 13 - SPECIAL CONSTRUCTION**  
NOT APPLICABLE

**DIVISION 14 - CONVEYING SYSTEMS**  
NOT APPLICABLE

**DIVISION 15 - MECHANICAL**

15100 .....	MECHANICAL REQUIREMENTS.....	7
15300 .....	PIPING SYSTEMS, SPECIALTIES AND VALVES .....	6
15400 .....	PLUMBING SYSTEMS.....	3

**DIVISION 16 - ELECTRICAL**  
NOT APPLICABLE

## **SECTION 01100 - SUMMARY**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 WORK COVERED BY CONTRACT DOCUMENTS**

- A. Project Description: Without force and effect on the requirements of the Contract Documents, the description of the work of the Contract is summarized as follows:
- B. Project Identification: Project consists of Re-roof upgrades to the University of Utah, Medical Library in Salt Lake City, Utah.
  - 1. Project Location:  
UDOT Region II Administration Building  
2010 South 2760 West  
Salt Lake City, Utah 84119
  - 2. DFCM Project No. 06188900
  - 3. Owner: State of Utah - DFCM
- C. Architect Identification: The Contract Documents, dated November 30, 2006 were prepared for Project by: Scott P. Evans, Architect & Associates P.C., - 108 West Center Street, - Bountiful, Utah 84010
- D. The Work consists of but is not limited to:
  - 1. Demolition of the existing roof system down to the structural substrate.
  - 2. Mechanically fasten new insulation to existing roof deck.
  - 3. Install new single ply roofing system.
  - 4. Removal and reinstallation of existing rooftop mounted electrical and mechanical equipment items as indicated on the drawings.
  - 5. Remove and replace all sheet metal flashing and trim as indicated.
  - 6. All other items as designated on the drawings and as called for in the specifications.

#### **1.3 CONTRACT**

- A. Project will be constructed under a general construction contract.

**END OF SECTION 01100**

## **SECTION 01140 - WORK RESTRICTIONS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.
- B. Coordinate mechanical and/or electrical equipment “down time” with the Owner and be guided by his instructions.

#### **1.2 USE OF PREMISES**

- A. Use of Site: Limit use of premises to work in areas indicated. Do not disturb portions of site beyond areas in which the Work is indicated.
  - 1. Limits: Confine constructions operations/staging to areas indicated on the drawings and that allowed by the agency/owner.
  - 2. Owner Occupancy: Allow for Owner occupancy of site and use by the public.
  - 3. Driveways and Entrances: Keep driveways and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials.
    - a. Schedule deliveries to minimize use of driveways and entrances.
    - b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.
- B. Use of Existing Buildings: Maintain existing buildings in a weathertight condition throughout construction period. Repair damage caused by construction operations. Protect buildings and its occupants during construction period.

#### **1.3 OCCUPANCY REQUIREMENTS**

- A. Full Owner Occupancy: Owner will occupy site and existing building during entire construction period. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's operations.
- B. See DFCM RFP for special requirements.

### **PART 2 - PRODUCTS (Not Used)**

### **PART 3 - EXECUTION (Not Used)**

**END OF SECTION 01140**

## **SECTION 01250 - CONTRACT MODIFICATION PROCEDURES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section specifies administrative and procedural requirements for handling and processing Contract modifications.
- B. Related Sections include the following:
  - 1. Division 1 Section "Product Requirements" for administrative procedures for handling requests for substitutions made after Contract award.

#### **1.3 MINOR CHANGES IN THE WORK**

- A. Architect will issue supplemental instructions authorizing Minor Changes in the Work, not involving adjustment to the Contract Sum or the Contract Time.

#### **1.4 PROPOSAL REQUESTS**

- A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.
  - 1. Proposal Requests issued by Architect are for information only. Do not consider them instructions either to stop work in progress or to execute the proposed change.
  - 2. Within 3 days after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.
    - a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
    - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
    - c. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
- B. Contractor-Initiated Proposals: If latent or unforeseen conditions require modifications to the Contract, Contractor may propose changes by submitting a request for a change.

1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
  2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
  3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
  4. Include an updated Contractor's Construction Schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
  5. Comply with requirements in Division 1 Section "Product Requirements" if the proposed change requires substitution of one product or system for product or system specified.
- C. Proposal Request Form: For Change Order proposals, use forms provided by Owner. Sample copies are included at end of this Section.

#### 1.5 CHANGE ORDER PROCEDURES

- A. On Owner's approval of a Proposal Request, Architect will issue a Change Order for signatures of Owner and Contractor. Contractor is to sign and return to the Architects office (all copies).

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

**END OF SECTION 01250**



## **SECTION 01290 - PAYMENT PROCEDURES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section specifies administrative and procedural requirements necessary to prepare and process Applications for Payment.
- B. Related Sections include the following:
  - 1. Division 1 Section "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.
  - 2. Division 1 Section "Construction Progress Documentation" for administrative requirements governing preparation and submittal of Contractor's Construction Schedule and Submittals Schedule.

#### **1.3 DEFINITIONS**

- A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

#### **1.4 SCHEDULE OF VALUES**

- A. Coordination: Coordinate preparation of the Schedule of Values with preparation of Contractor's Construction Schedule.
  - 1. Correlate line items in the Schedule of Values with other required administrative forms and schedules, including the following:
    - a. Application for Payment forms with Continuation Sheets.
    - b. Submittals Schedule.
  - 2. Submit the Schedule of Values to Architect at earliest possible date but no later than seven days before the date scheduled for submittal of initial Applications for Payment.
- B. Format and Content: Use the Project Manual table of contents as a guide to establish line items for the Schedule of Values. Provide at least one line item for each Specification Section.
  - 1. Identification: Include the following Project identification on the Schedule of Values:
    - a. Project name and location.
    - b. Name of Architect.

- c. Architect's project number.
  - d. Contractor's name and address.
  - e. Date of submittal.
- 2. Arrange the Schedule of Values in tabular form with separate columns to indicate the following for each item listed:
  - a. Related Specification Section or Division.
  - b. Description of the Work.
  - c. Change Orders (numbers) that affect value.
  - d. Dollar value.
    - 1) Percentage of the Contract Sum to nearest one-hundredth percent, adjusted to total 100 percent.
- 3. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Coordinate with the Project Manual table of contents. Provide several line items for principal subcontract amounts, where appropriate.
- 4. Round amounts to nearest whole dollar; total shall equal the Contract Sum.
- 5. Provide a separate line item in the Schedule of Values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.
  - a. Differentiate between items stored on-site and items stored off-site. Include evidence of insurance or bonded warehousing if required.
- 6. Provide separate line items in the Schedule of Values for initial cost of materials, for each subsequent stage of completion, and for total installed value of that part of the Work.
- 7. Each item in the Schedule of Values and Applications for Payment shall be complete. Include total cost and proportionate share of general overhead and profit for each item.
  - a. Temporary facilities and other major cost items that are not direct cost of actual work-in-place may be shown either as separate line items in the Schedule of Values or distributed as general overhead expense, at Contractor's option.
- 8. Schedule Updating: Update and resubmit the Schedule of Values before the next Applications for Payment when Change Orders or Construction Change Directives result in a change in the Contract Sum.

## 1.5 APPLICATIONS FOR PAYMENT

- A. Each Application for Payment shall be consistent with previous applications and payments as certified by Architect and paid for by Owner.
  - 1. Initial Application for Payment, Application for Payment at time of Substantial Completion, and final Application for Payment involve additional requirements.
- B. Payment Application Times: The date for each progress payment is indicated in the Agreement between Owner and Contractor. The period of construction Work covered by each Application for Payment is the period indicated in the Agreement.
- C. Payment Application Forms: Use AIA Document G702 and AIA Document G703 Continuation Sheets as form for Applications for Payment.

- D. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Architect will return incomplete applications without action.
1. Entries shall match data on the Schedule of Values and Contractor's Construction Schedule. Use updated schedules if revisions were made.
  2. Include amounts of Change Orders and Construction Change Directives issued before last day of construction period covered by application.
- E. Transmittal: Submit 2 signed and notarized original copies of each Application for Payment to Architect by a method ensuring receipt within 24 hours. One copy shall include waivers of lien and similar attachments if required.
1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.
- F. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:
1. List of subcontractors.
  2. Schedule of Values.
  3. Contractor's Construction Schedule (preliminary if not final).
  4. Certificates of insurance and insurance policies.
  5. Performance and payment bonds.
  6. Data needed to acquire Owner's insurance.
- G. Application for Payment at Substantial Completion: After issuing the Certificate of Substantial Completion, submit an Application for Payment showing 100 percent completion for portion of the Work claimed as substantially complete.
1. Include documentation supporting claim that the Work is substantially complete and a statement showing an accounting of changes to the Contract Sum.
  2. This application shall reflect Certificates of Partial Substantial Completion issued previously for Owner occupancy of designated portions of the Work.
- H. Final Payment Application: Submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:
1. Evidence of completion of Project closeout requirements.
  2. Updated final statement, accounting for final changes to the Contract Sum.
  3. AIA Document G702 Payment Application and AIA Document G703 Continuation Sheets
  4. AIA Document G706, "Contractor's Affidavit of Payment of Debts and Claims."
  5. AIA Document G706A, "Contractor's Affidavit of Release of Liens."
  6. AIA Document G707, "Consent of Surety to Final Payment."
  7. Evidence that claims have been settled.
  8. Final, liquidated damages settlement statement.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

**END OF SECTION 01290**

# **SECTION 01310 - PROJECT MANAGEMENT AND COORDINATION**

## **PART 1 - GENERAL**

### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

### **1.2 SUMMARY**

- A. This Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
  - 1. General project coordination procedures.
  - 2. Coordination Drawings.
  - 3. Administrative and supervisory personnel.
  - 4. Project meetings.
- B. Related Sections: The following Sections contain requirements that relate to this Section:
  - 1. Division 1 Section "Construction Progress Documentation" for preparing and submitting the Contractor's Construction Schedule.
  - 2. Division 1 Section "Execution Requirements" for procedures for coordinating general installation and field-engineering services, including establishment of benchmarks and control points.
  - 3. Division 1 Section "Closeout Procedures" for coordinating Contract closeout.

### **1.3 COORDINATION**

- A. Coordination: Coordinate construction operations included in various Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections, that depend on each other for proper installation, connection, and operation.
  - 1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
  - 2. Coordinate installation of different components with other contractors to ensure maximum accessibility for required maintenance, service, and repair.
  - 3. Make adequate provisions to accommodate items scheduled for later installation.
- B. If necessary, prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
  - 1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.
- C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities and activities of other contractors to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:

1. Preparation of Contractor's Construction Schedule.
2. Preparation of the Schedule of Values.
3. Installation and removal of temporary facilities and controls.
4. Delivery and processing of submittals.
5. Progress meetings.
6. Preinstallation conferences.
7. Project closeout activities.

#### 1.4 SUBMITTALS

- A. Coordination Drawings: Prepare Coordination Drawings if limited space availability necessitates maximum utilization of space for efficient installation of different components or if coordination is required for installation of products and materials fabricated by separate entities.
1. Indicate relationship of components shown on separate Shop Drawings.
  2. Indicate required installation sequences.
  3. Refer to Division 15 Section "Basic Mechanical Materials and Methods" and Division 16 Section "Basic Electrical Materials and Methods" for specific Coordination Drawing requirements for mechanical and electrical installations.

#### 1.5 PROJECT MEETINGS

- A. General: Schedule and conduct meetings and conferences at Project site, unless otherwise indicated.
1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times.
  2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
  3. Minutes: Record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner and Architect, within 3 days of the meeting.
- B. Preconstruction Conference: Schedule a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after execution of the Agreement. Hold the conference at Project site or another convenient location. Conduct the meeting to review responsibilities and personnel assignments.
1. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; manufacturers; suppliers; and other concerned parties shall attend the conference. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
  2. Agenda: Discuss items of significance that could affect progress, including, but not limited to the following:
    - a. Tentative construction schedule.
    - b. Phasing.
    - c. Critical work sequencing.
    - d. Designation of responsible personnel.
    - e. Procedures for processing field decisions and Change Orders.
    - f. Procedures for processing Applications for Payment.
    - g. Distribution of the Contract Documents.
    - h. Submittal procedures.
    - i. Preparation of Record Documents.
    - j. Use of the premises.
    - k. Responsibility for temporary facilities and controls.
    - l. Parking availability.

- m. Office, work, and storage areas.
  - n. Equipment deliveries and priorities.
  - o. First aid.
  - p. Security.
  - q. Progress cleaning.
  - r. Working hours.
  - s. Schedule progress meetings.
- C. Progress Meetings: Conduct progress meetings at days/times agreed upon at the preconstruction conference. Coordinate dates of meetings with preparation of payment requests.
- 1. Attendees: In addition to representatives of Owner and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
  - 2. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
    - a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's Construction Schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
    - b. Review present and future needs of each entity present, including the following:
      - 1) Interface requirements.
      - 2) Sequence of operations.
      - 3) Status of submittals.
      - 4) Hazards and risks.
      - 5) Progress cleaning.
      - 6) Quality and work standards.
      - 7) Change Orders.
      - 8) Documentation of information for payment requests.
  - 3. Reporting: Distribute minutes of the meeting to each party present and to parties who should have been present. Include a brief summary, in narrative form, of progress since the previous meeting and report.
    - a. Schedule Updating: Revise Contractor's Construction Schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

**END OF SECTION 01310**

## **SECTION 01330 - SUBMITTAL PROCEDURES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other miscellaneous submittals.
- B. Related Sections include the following:
  - 1. Division 1 Section "Payment Procedures" for submitting Applications for Payment.
  - 2. Division 1 Section "Construction Progress Documentation" for submitting schedules and reports, including Contractor's Construction Schedule and the Submittals Schedule.
  - 3. Division 1 Section "Closeout Procedures" for submitting warranties Project Record Documents and operation and maintenance manuals.
  - 4. Division 1 Section "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.
  - 5. Division 1 Section "Operation and Maintenance Data" for operation and maintenance manual requirements.

#### **1.3 DEFINITIONS**

- A. Action Submittals: Written and graphic information that requires Architect's responsive action.
- B. Informational Submittals: Written information that does not require Architect's approval. Submittals may be rejected for not complying with requirements.

#### **1.4 SUBMITTAL PROCEDURES**

- A. General: Selected electronic copies of CAD Drawings of the Contract Drawings may be provided by Architect for Contractor's use in preparing submittals at the Architects' option.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
  - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
  - 2. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.
    - a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.

- C. Submittals Schedule: Comply with requirements in Division 1 Section "Construction Progress Documentation" for list of submittals and time requirements for scheduled performance of related construction activities.
- D. Processing Time: Allow enough time for submittal review, including time for re-submittals, as follows. Time for review shall commence on Architect's receipt of submittal.
1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if processing must be delayed to permit coordination with subsequent submittals. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
  2. If intermediate submittal is necessary, process it in same manner as initial submittal.
  3. Allow 15 days for processing each resubmittal.
  4. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing.
- E. Identification: Place a permanent label or title block on each submittal for identification.
1. Indicate name of firm or entity that prepared each submittal on label or title block.
  2. Provide a space approximately 4 by 5 inches on label or beside title block to record Contractor's review and approval markings and action taken by Architect.
  3. Include the following information on label for processing and recording action taken:
    - a. Project name.
    - b. Date.
    - c. Name and address of Contractor.
    - d. Name and address of subcontractor.
    - e. Name and address of supplier.
    - f. Name of manufacturer.
    - g. Number and title of appropriate Specification Section.
    - h. Drawing number and detail references, as appropriate.
    - i. Other necessary identification.
- F. Deviations: Highlight, encircle, or otherwise identify deviations from the Contract Documents on submittals.
- G. Additional Copies: Unless additional copies are required for final submittal, and unless Architect observes noncompliance with provisions of the Contract Documents, initial submittal may serve as final submittal.
1. Submit one copy of submittal to concurrent reviewer in addition to specified number of copies to Architect.
  2. Additional copies submitted for maintenance manuals will be marked with action taken and will be returned.
- H. Transmittal: Package each submittal individually and appropriately for transmittal and handling. Transmit each submittal using a transmittal form. Architect will return submittals, without review, received from sources other than Contractor.
1. Transmittal Form: Provide locations on form for the following information:
    - a. Project name.
    - b. Date.
    - c. Destination (To:).
    - d. Source (From:).
    - e. Names of subcontractor, manufacturer, and supplier.



- f. Category and type of submittal.
  - g. Submittal purpose and description.
  - h. Submittal and transmittal distribution record.
  - i. Remarks.
  - j. Signature of transmitter.
- I. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- J. Use for Construction: Use only final submittals with mark indicating action taken by Architect in connection with construction.

## PART 2 - PRODUCTS

### 2.1 ACTION SUBMITTALS

- A. General: Prepare and submit Action Submittals required by individual Specification Sections.
1. Number of Copies: Submit **six copies** of each submittal, unless otherwise indicated. Architect will return remaining copies after keeping one for his file and distributing a copy to the Owner and Consultants (if required). Mark up and retain one returned copy as a Project Record Document.
- B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
1. If information must be specially prepared for submittal because standard printed data are not suitable for use, submit as Shop Drawings, not as Product Data.
2. Mark each copy of each submittal to show which products and options are applicable.
3. Include the following information:
- a. Compliance with recognized trade association standards.
  - b. Compliance with recognized testing agency standards.
  - c. Application of testing agency labels and seals.
  - d. Standard color charts.
  - e. Manufacturer's catalog cuts.
  - f. Notation of coordination requirements.
  - g. Standard product operating and maintenance manuals.
4. Include the following information only where it differs from or is not described in the Project Documents:
- a. Manufacturer's written recommendations.
  - b. Manufacturer's product specifications.
  - c. Manufacturer's installation instructions.
  - d. Printed performance curves.
  - e. Operational range diagrams.
  - f. Product samples as directed by the Architect (see para. "D" below).
- C. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.

1. Preparation: Include the following information, as applicable:
  - a. Dimensions.
  - b. Identification of products.
  - c. Fabrication and installation drawings.
  - d. Compliance with specified standards.
  - e. Notation of coordination requirements.
  - f. Notation of dimensions established by field measurement.
  - g. Show surface drainage swales and slopes.
2. Wiring Diagrams: Differentiate between manufacturer-installed and field-installed wiring.
3. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches but no larger than 24 by 30 inches.
4. Number of Copies: Submit six blue- or black-line prints of each submittal, unless prints are required for operation and maintenance manuals. Submit eight prints where prints are required for operation and maintenance manuals. Architect will retain two prints; remainder will be returned. Mark up and retain one returned print as a Project Record Drawing.

## 2.2 INFORMATIONAL SUBMITTALS

- A. Contractor's Construction Schedule: Comply with requirements in Division 1 Section "Construction Progress Documentation."
- B. Maintenance Data: Prepare written and graphic instructions and procedures for operation and normal maintenance of products and equipment. Comply with requirements in Division 1 Section "Closeout Procedures."
- C. Design Data: Where manufacturer is responsible for product design, prepare written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.
- D. Manufacturer's Instructions: Prepare written or published information that documents manufacturer's recommendations, guidelines, and procedures for installing or operating a product or equipment. Include name of product and name, address, and telephone number of manufacturer. Include the following, as applicable:
  1. Preparation of substrates.
  2. Required substrate tolerances.
  3. Sequence of installation or erection.
  4. Required installation tolerances.
  5. Required adjustments.
  6. Recommendations for cleaning and protection.

## PART 3 - EXECUTION

### 3.1 CONTRACTOR'S REVIEW

- A. Review each submittal and check for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect.

- B. Approval Stamp: Stamp each submittal with a uniform, approval stamp. Include Project name and location, submittal number, Specification Section title and number, name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

### 3.2 ARCHITECT'S ACTION

- A. General: Architect will not review submittals that do not bear Contractor's approval stamp and will return them without action.
- B. Action Submittals: Architect will review each submittal, make marks to indicate corrections or modifications required, and return it. Architect will stamp each submittal with an action stamp and will mark stamp appropriately to indicate action taken, as follows:
  - 1. "Furnish as Submitted"
  - 2. "Furnish as Corrected"
  - 3. "Rejected – Revise and Resubmit"
- C. Informational Submittals: Architect will review each submittal and will not return it, or will reject and return it if it does not comply with requirements. Architect will forward each submittal to appropriate party.
- D. Submittals not required by the Contract Documents will not be reviewed and may be discarded.

**END OF SECTION 01330**

## **SECTION 01420 - REFERENCES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 DEFINITIONS**

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.
- C. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "approved," "required," and "permitted" have the same meaning as "directed."
- D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Installer": Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, and similar operations.
  - 1. Using a term such as "carpentry" does not imply that certain construction activities must be performed by accredited or unionized individuals of a corresponding generic name, such as "carpenter." It also does not imply that requirements specified apply exclusively to tradespeople of the corresponding generic name.
- J. "Experienced": When used with an entity, "experienced" means having successfully completed a minimum of five previous projects similar in size and scope to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

- K. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

**END OF SECTION 01420**

## **SECTION 01500 - TEMPORARY FACILITIES AND CONTROLS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes requirements for Contractor furnished temporary facilities and controls, including temporary utilities, support facilities, and security and protection facilities.
- B. Temporary utilities include, but are not limited to, the following:
  - 1. Sanitary facilities, including toilets, wash facilities, and drinking-water facilities.
  - 2. Telephone service.
- C. Security and protection facilities include, but are not limited to, the following:
  - 1. Adequate security enclosure and lockup for staging area and materials storage area.
- D. Related Sections include the following:
  - 1. Division 1 Section "Submittal Procedures" for procedures for submitting copies of implementation and termination schedule and utility reports.
  - 2. See DFCM's RFP for special requirements.

#### **1.3 DEFINITIONS**

- A. Permanent Enclosure: As determined by Architect, permanent or temporary roofing is complete, insulated, and weathertight; exterior walls are insulated and weathertight; and all openings are closed with permanent construction or substantial temporary closures.

#### **1.4 USE CHARGES**

- A. General: Cost or use charges for temporary facilities are not chargeable to Owner or Architect and shall be included in the Contract Sum. Allow other entities to use temporary services and facilities without cost, including, but not limited to, the following:
  - 1. Owner's construction forces.
  - 2. Occupants of Project.
  - 3. Architect.
  - 4. Testing agencies.
  - 5. Personnel of authorities having jurisdiction.

## 1.5 QUALITY ASSURANCE

### A. Standards:

1. Comply with ANSI A10.6, NECA's "Temporary Electrical Facilities," and NFPA 241.  
Note: Trade Jurisdictions: Assigned responsibilities for installation and operation of temporary utilities are not intended to interfere with trade regulations and union jurisdictions.

### B. 2. Comply with indicated UL and FM requirements.

### C. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

## 1.6 PROJECT CONDITIONS

### A. Temporary Utilities: At earliest feasible time, when acceptable to Owner, change over from use of temporary service to use of permanent service.

1. Temporary Use of Permanent Facilities: Installer of each permanent service shall assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

### B. Conditions of Use: The following conditions apply to use of temporary services and facilities by all parties engaged in the Work:

1. Keep temporary services and facilities clean and neat.
2. Relocate temporary services and facilities as required by progress of the Work.

## PART 2 - PRODUCTS

## 2.1 MATERIALS

### A. General: Provide new materials. Provide materials suitable for use intended.

### B. Portable Chain-Link Fencing: Minimum 2-inch 9-gage, galvanized steel, chain-link fabric fencing; minimum 6 feet high with galvanized steel pipe posts; minimum 2-3/8-inch- OD line posts and 2-7/8-inch- OD corner and pull posts, with 1-5/8-inch- OD top and bottom rails. Provide galvanized steel bases for supporting posts. Fence is to be lockable and all gaps in fencing material must be kept to less than 4".

### C. Lumber and Plywood: Comply with requirements in Division 6 Section "Rough Carpentry."

### D. Tarpaulins: Fire-resistive labeled canvas with flame-spread rating of 15 or less.

### E. Water: Potable.

## 2.2 EQUIPMENT

### A. General: Provide equipment suitable for use intended.

- B. Fire Extinguishers: Hand carried, portable, UL rated. Provide class and extinguishing agent as indicated or a combination of extinguishers of NFPA-recommended classes for exposures.
  - 1. Comply with NFPA 10 and NFPA 241 for classification, extinguishing agent, and size required by location and class of fire exposure.
- C. Self-Contained Toilet Units: Single-occupant units of chemical, aerated recirculation, or combustion type; vented; fully enclosed with a glass-fiber-reinforced polyester shell or similar nonabsorbent material.
- D. Drinking-Water Fixtures: Containerized, tap-dispenser, bottled-water drinking-water units, including paper cup supply.
  - 1. Where power is accessible, provide electric water coolers to maintain dispensed water temperature at 45 to 55 deg F.
- E. Provide contractor telephone. Do not use Owner's telephone services.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required.
- B. Provide each facility ready for use when needed to avoid delay. Maintain and modify as required. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

#### 3.2 TEMPORARY UTILITY INSTALLATION

- A. General: Engage appropriate local utility company to install temporary service or connect to existing service. Where utility company provides only part of the service, provide the remainder with matching, compatible materials and equipment. Comply with utility company recommendations.
  - 1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
  - 2. Provide adequate capacity at each stage of construction. Before temporary utility is available, provide trucked-in services.
  - 3. Obtain easements to bring temporary utilities to Project site where Owner's easements cannot be used for that purpose.
- B. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking-water fixtures. Comply with regulations and health codes for type, number, location, operation, and maintenance of fixtures and facilities.
  - 1. Disposable Supplies: Provide toilet tissue, paper towels, paper cups, and similar disposable materials for each facility. Maintain adequate supply. Provide covered waste containers for disposal of used material.
  - 2. Toilets: Install self-contained toilet units. Shield toilets to ensure privacy.
  - 3. Drinking-Water Facilities: Provide bottled-water, drinking-water units.
    - a. Where power is accessible, provide electric water coolers to maintain dispensed water temperature at 45 to 55 deg F.



4. Telephone Service: Arrange acceptable communications means approved by the Architect.
  - a. Provide either radio or telephonic communications to the jobsite, which makes reasonable communication with the jobsite available for the Architect, Owner and Contractor's home office.

**END OF SECTION 01500**

## **SECTION 01600 - PRODUCT REQUIREMENTS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes the following administrative and procedural requirements: selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; product substitutions; and comparable products.
- B. Related Sections include the following:
  - 1. Division 1 Section "References" for applicable industry standards for products specified.
  - 2. Division 1 Section "Closeout Procedures" for submitting warranties for contract closeout.
  - 3. Divisions 2 through 16 Sections for specific requirements for warranties on products and installations specified to be warranted.

#### **1.3 DEFINITIONS**

- A. Products: Items purchased for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
  - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation, shown or listed in manufacturer's published product literature, that is current as of date of the Contract Documents.
  - 2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
  - 3. Comparable Product: Product that is demonstrated and approved through submittal process, or where indicated as a product substitution, to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.
- C. Manufacturer's Warranty: Preprinted written warranty published by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
- D. Special Warranty: Written warranty required by or incorporated into the Contract Documents, either to extend time limit provided by manufacturer's warranty or to provide more rights for Owner.

#### 1.4 SUBMITTALS

- A. Substitution Requests: Submit three copies of each request for consideration. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
1. Substitution Request Form: Use CSI Form 13.1A .
  2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
    - a. Statement indicating why specified material or product cannot be provided.
    - b. Coordination information, including a list of changes or modifications needed to other parts of the Work and to construction performed by Owner and separate contractors, that will be necessary to accommodate proposed substitution.
    - c. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
    - d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
    - e. Samples, where applicable or requested.
    - f. Detailed comparison of Contractor's Construction Schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating lack of availability or delays in delivery.
    - g. Cost information, including a proposal of change, if any, in the Contract Sum.
    - h. Contractor's certification that proposed substitution complies with requirements in the Contract Documents and is appropriate for applications indicated.
    - i. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
  3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within one week of receipt of a request for substitution. Architect will notify Contractor of acceptance or rejection of proposed substitution within 15 days of receipt of request, or 7 days of receipt of additional information or documentation, whichever is later.
    - a. Form of Acceptance: Change Order.
    - b. Use product specified if Architect cannot make a decision on use of a proposed substitution within time allocated.

#### 1.5 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, product selected shall be compatible with products previously selected, even if previously selected products were also options.

#### 1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft. Comply with manufacturer's written instructions.
1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.

2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
  3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
  4. Inspect products on delivery to ensure compliance with the Contract Documents and to ensure that products are undamaged and properly protected.
  5. Store products to allow for inspection and measurement of quantity or counting of units.
  6. Store materials in a manner that will not endanger Project structure.
  7. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
  8. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
  9. Protect stored products from damage.
- B. Storage: Provide a secure location and enclosure at Project site for storage of materials and equipment by Owner's construction forces. Coordinate location with Owner.

#### 1.7 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution. Submit a draft for approval before final execution.
1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
  2. Refer to Divisions 2 through 16 Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Division 1 Section "Closeout Procedures."

### PART 2 - PRODUCTS

#### 2.1 PRODUCT OPTIONS

- A. General Product Requirements: Provide products that comply with the Contract Documents, that are undamaged, and unless otherwise indicated, that are new at time of installation.
1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
  2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
  3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
  4. Where products are accompanied by the term "as selected," Architect will make selection.
  5. Where products are accompanied by the term "match sample," sample to be matched is Architect's.

6. Descriptive, performance, and reference standard requirements in the Specifications establish "salient characteristics" of products.

B. Product Selection Procedures: Procedures for product selection include the following:

1. Products: Where Specification paragraphs or subparagraphs titled "Products" introduce a list of names of both products and manufacturers, provide one of the products listed that complies with requirements.
  - a. Substitutions may be considered, unless otherwise indicated.
2. Manufacturers: Where Specification paragraphs or subparagraphs titled "Manufacturers" introduce a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements.
  - a. Substitutions may be considered, unless otherwise indicated.
3. Available Products: Where Specification paragraphs or subparagraphs titled "Available Products" introduce a list of names of both products and manufacturers, provide one of the products listed or another product that complies with requirements. Comply with provisions in "Comparable Products" Article to obtain approval for use of an unnamed product.
4. Available Manufacturers: Where Specification paragraphs or subparagraphs titled "Available Manufacturers" introduce a list of manufacturers' names, provide a product by one of the manufacturers listed or another manufacturer that complies with requirements. Comply with provisions in "Comparable Products" Article to obtain approval for use of an unnamed product.
5. Product Options: Where Specification paragraphs titled "Product Options" indicate that size, profiles, and dimensional requirements on Drawings are based on a specific product or system, provide either the specific product or system indicated or a comparable product or system by another manufacturer. Comply with provisions in "Product Substitutions" Article.

## 2.2 PRODUCT SUBSTITUTIONS

- A. Timing: Architect will consider requests for substitution if received within 60 days after the Notice to Proceed. Requests received after that time may be considered or rejected at discretion of Architect.
- B. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
  1. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
  2. Requested substitution does not require extensive revisions to the Contract Documents.
  3. Requested substitution is consistent with the Contract Documents and will produce indicated results.
  4. Substitution request is fully documented and properly submitted.
  5. Requested substitution will not adversely affect Contractor's Construction Schedule.
  6. Requested substitution has received necessary approvals of authorities having jurisdiction.
  7. Requested substitution is compatible with other portions of the Work.
  8. Requested substitution has been coordinated with other portions of the Work.
  9. Requested substitution provides specified warranty.

## 2.3 COMPARABLE PRODUCTS

- A. Where products or manufacturers are specified by name, submit the following, in addition to other required submittals, to obtain approval of an unnamed product:
1. Evidence that the proposed product does not require extensive revisions to the Contract Documents, that it is consistent with the Contract Documents and will produce the indicated results, and that it is compatible with other portions of the Work.
  2. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant qualities include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
  3. Evidence that proposed product provides specified warranty.
  4. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners, if requested.
  5. Samples, if requested.

## PART 3 - EXECUTION (Not Used)

**END OF SECTION 01600**

## **SECTION 01700 - EXECUTION REQUIREMENTS**

### **PART 1 - GENERAL**

#### **1.1 SUMMARY**

- A. This Section includes general procedural requirements governing execution of the Work including, but not limited to, the following:
  - 1. Construction layout.
  - 2. Field engineering and surveying.
  - 3. General installation of products.
  - 4. Progress cleaning.
  - 5. Starting and adjusting.
  - 6. Protection of installed construction.
  - 7. Correction of the Work.
- B. See Division 1 Section "Closeout Procedures" for submitting final property survey with Project Record Documents, recording of Owner-accepted deviations from indicated lines and levels, and final cleaning.

#### **1.2 SUBMITTALS**

- A. Certificates: Submit certificate signed by land surveyor certifying that location and elevation of improvements comply with requirements.
- B. Landfill Receipts: Submit copy of receipts issued by a landfill facility, licensed to accept hazardous materials, for hazardous waste disposal.
- C. Certified Surveys: Submit two copies signed by land surveyor.
- D. Final Property Survey: Submit five (5) copies showing the Work performed and record survey data.

#### **1.3 QUALITY ASSURANCE**

- A. Land Surveyor Qualifications: A professional land surveyor who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing land-surveying services of the kind indicated.

### **PART 2 - PRODUCTS (Not Used)**

### **PART 3 - EXECUTION**

### 3.1 EXAMINATION

- A. Existing Conditions: The existence and location of site improvements, utilities, and other construction indicated as existing are not guaranteed. Before beginning work, investigate and verify the existence and location of mechanical and electrical systems and other construction affecting the Work.
  - 1. Before construction, verify the location and points of connection of utility services.
- B. Existing Utilities: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities and other construction affecting the Work.
  - 1. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- C. Acceptance of Conditions: Examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
  - 1. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
  - 2. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
  - 3. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

### 3.2 PREPARATION

- A. Existing Utility Information: Furnish information to local utility that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary utility services according to requirements indicated:
  - 1. Notify Owner not less than two days in advance of proposed utility interruptions.
  - 2. Do not proceed with utility interruptions without Architect's written permission.
- C. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- D. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

## EXECUTION REQUIREMENTS



- E. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents, submit a request for information to Architect. Include a detailed description of problem encountered, together with recommendations for changing the Contract Documents. Submit requests on CSI Form 13.2A, "Request for Interpretation."

### 3.3 CONSTRUCTION LAYOUT

- A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks. If discrepancies are discovered, notify Architect promptly.
- B. General: Engage a land surveyor to lay out the Work using accepted surveying practices.
  - 1. Establish benchmarks and control points to set lines and levels at each story of construction and elsewhere as needed to locate each element of Project.
  - 2. Establish dimensions within tolerances indicated. Do not scale Drawings to obtain required dimensions.
  - 3. Inform installers of lines and levels to which they must comply.
  - 4. Check the location, level and plumb, of every major element as the Work progresses.
  - 5. Notify Architect when deviations from required lines and levels exceed allowable tolerances.
  - 6. Close site surveys with an error of closure equal to or less than the standard established by authorities having jurisdiction.
- C. Site Improvements: Locate and lay out site improvements, including pavements, grading, fill and topsoil placement, utility slopes, and invert elevations.
- D. Building Lines and Levels: Locate and lay out control lines and levels for structures, building foundations, column grids, and floor levels, including those required for mechanical and electrical work. Transfer survey markings and elevations for use with control lines and levels. Level foundations and piers from two or more locations.
- E. Record Log: Maintain a log of layout control work. Record deviations from required lines and levels. Include beginning and ending dates and times of surveys, weather conditions, name and duty of each survey party member, and types of instruments and tapes used. Make the log available for reference by Architect.

### 3.4 FIELD ENGINEERING

- A. Reference Points: Locate existing permanent benchmarks, control points, and similar reference points before beginning the Work. Preserve and protect permanent benchmarks and control points during construction operations.
- B. Benchmarks: Establish and maintain a minimum of [two] <Insert number> permanent benchmarks on Project site, referenced to data established by survey control points. Comply with authorities having jurisdiction for type and size of benchmark.
  - 1. Record benchmark locations, with horizontal and vertical data, on Project Record Documents.

## EXECUTION REQUIREMENTS

### 3.5 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
  - 1. Make vertical work plumb and make horizontal work level.
  - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
  - 3. Conceal pipes, ducts, and wiring in finished areas, unless otherwise indicated.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Anchors and Fasteners: Provide anchors and fasteners as required to anchor each component securely in place, accurately located and aligned with other portions of the Work.
  - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
  - 2. Allow for building movement, including thermal expansion and contraction.
- F. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
- G. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

### 3.6 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Coordinate progress cleaning for joint-use areas where more than one installer has worked. Enforce requirements strictly. Dispose of materials lawfully.
  - 1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
  - 2. Do not hold materials more than 7 days during normal weather or 3 days if the temperature is expected to rise above 80 deg F.
  - 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
  - 1. Remove liquid spills promptly.

## EXECUTION REQUIREMENTS

2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
- F. Waste Disposal: Burying or burning waste materials on-site will not be permitted. Washing waste materials down sewers or into waterways will not be permitted.
- G. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
- H. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- I. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

### 3.7 STARTING AND ADJUSTING

- A. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.
- B. Adjust operating components for proper operation without binding. Adjust equipment for proper operation.
- C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

### 3.8 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.

### 3.9 CORRECTION OF THE WORK

- A. Repair or remove and replace defective construction. Restore damaged substrates and finishes. Comply with requirements in Division 1 Section "Cutting and Patching."

1. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment.
- B. Restore permanent facilities used during construction to their specified condition.
- C. Remove and replace damaged surfaces that are exposed to view if surfaces cannot be repaired without visible evidence of repair.
- D. Repair components that do not operate properly. Remove and replace operating components that cannot be repaired.
- E. Remove and replace chipped, scratched, and broken glass or reflective surfaces.

**END OF SECTION 01700**

## **SECTION 01731 - CUTTING AND PATCHING**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes procedural requirements for cutting and patching.
- B. Related Sections include the following:
  - 1. Division 1 Section "Selective Demolition" for demolition of selected portions of the building for alterations.
  - 2. Division 7 Section "Through-Penetration Firestop Systems" for patching fire-rated construction.
  - 3. Divisions 2 through 16 Sections for specific requirements and limitations applicable to cutting and patching individual parts of the Work.
    - a. Requirements in this Section apply to mechanical and electrical installations. Refer to Divisions 15 and 16 Sections for other requirements and limitations applicable to cutting and patching mechanical and electrical installations.

#### **1.3 DEFINITIONS**

- A. Cutting: Removal of existing construction necessary to permit installation or performance of other Work.
- B. Patching: Fitting and repair work required to restore surfaces to original or better conditions after installation of other Work.

#### **1.4 QUALITY ASSURANCE**

- A. Structural Elements: Do not cut and patch structural elements in a manner that could change their load-carrying capacity or load-deflection ratio.
- B. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety.
- C. Miscellaneous Elements: Do not cut and patch the following elements or related components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety.
- D. Visual Requirements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch construction exposed on the exterior or in occupied spaces in

a manner that would, in Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.

1. If possible, retain original Installer or fabricator to cut and patch exposed Work listed below. If it is impossible to engage original Installer or fabricator, engage another recognized, experienced, and specialized firm.

- E Historical Elements: Where Work is to be executed on Historical Buildings, exercise extreme caution in performing construction activities so as to preserve the intrinsic historic building value and character.

## 1.5 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during cutting and patching operations, by methods and with materials so as not to void existing warranties.

## PART 2 - PRODUCTS

### 2.1 MATERIALS

- A. General: Comply with requirements specified in other Sections of these Specifications.
- B. Existing Materials: Use materials identical to existing materials. For exposed surfaces, use materials that visually match existing adjacent surfaces to the fullest extent possible.
1. If identical materials are unavailable or cannot be used, use materials that, when installed, will match the visual and functional performance of existing materials.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine surfaces to be cut and patched and conditions under which cutting and patching are to be performed.
1. Compatibility: Before patching, verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
  2. Proceed with installation only after unsafe or unsatisfactory conditions have been corrected.

### 3.2 PREPARATION

- A. Temporary Support: Provide temporary support of Work to be cut.
- B. Protection: Protect existing construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.
- C. Adjoining Areas: Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.

- D. Existing Services: Where existing services are required to be removed, relocated, or abandoned, bypass such services before cutting to minimize interruption of services to occupied areas.

### 3.3 PERFORMANCE

- A. General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
  - 1. Cut existing construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Cutting: Cut existing construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
  - 1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots as small as possible, neatly to size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
  - 2. Existing Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
  - 3. Concrete or Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
  - 4. Excavating and Backfilling: Comply with requirements in applicable Division 2 Sections where required by cutting and patching operations.
  - 5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
  - 6. Proceed with patching after construction operations requiring cutting are complete.
- C. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other Work. Patch with durable seams that are as invisible as possible. Provide materials and comply with installation requirements specified in other Sections of these Specifications.
  - 1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate integrity of installation.
  - 2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.
  - 3. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove existing floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
    - a. Where patching occurs in a painted surface, apply primer and intermediate paint coats over the patch and apply final paint coat over entire unbroken surface containing the patch. Provide additional coats until patch blends with adjacent surfaces.
  - 4. Ceilings: Patch, repair, or rehang existing ceilings as necessary to provide an even-plane surface of uniform appearance.
  - 5. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition.

**END OF SECTION**

## **SECTION 01732 - SELECTIVE DEMOLITION**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Demolition and removal of existing roof system to bare substrate including but not limited to existing membrane, base, insulation, cants, edge metal, flashing, counter-flashing and some wood nailers. Coordinate with the drawings.
  - 2. Repair procedures for selective demolition operations.
- B. Related Sections include the following:
  - 1. Division 1 Section "Summary" for use of the premises and phasing requirements.
  - 2. Division 1 Section "Work Restrictions" for restrictions on use of the premises due to Owner or tenant occupancy.
  - 3. Division 1 Section "Construction Progress Documentation" for preconstruction photographs taken before selective demolition.
  - 4. Division 1 Section "Temporary Facilities and Controls" for temporary construction and environmental-protection measures for selective demolition operations.
  - 5. Division 15 Sections for demolishing, cutting, patching, or relocating mechanical items.
  - 6. Division 16 Sections for demolishing, cutting, patching, or relocating electrical items.

#### **1.3 DEFINITIONS**

- A. Remove: Detach items from existing construction and legally dispose of them off-site, unless indicated to be removed and salvaged or removed and reinstalled.

#### **1.4 MATERIALS OWNERSHIP**

- A. Except for items or materials indicated to be reused, salvaged, reinstalled, or otherwise indicated to remain Owner's property, demolished materials shall become Contractor's property and shall be removed from Project site.

#### **1.5 PROJECT CONDITIONS**

- A. Maintain existing access ways to building facilities.



- B. Owner assumes no responsibility for condition of areas to be selectively demolished.
  - 1. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.
- C. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
  - 1. If materials suspected of containing hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract or by change order.
- D. Storage or sale of removed items or materials on-site will not be permitted.
- E. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.
  - 1. Maintain fire-protection facilities in service during selective demolition operations.

## PART 2 - PRODUCTS

### 2.1 REPAIR MATERIALS

- A. Use repair materials identical to existing materials.
  - 1. If identical materials are unavailable or cannot be used for exposed surfaces, use materials that visually match existing adjacent surfaces to the fullest extent possible.
  - 2. Use materials whose installed performance equals or surpasses that of existing materials.
- B. Comply with material and installation requirements specified in individual Specification Sections.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Survey existing conditions and correlate with requirements indicated to determine extent of selective demolition required. Detect and advise of hazards that may result from selective demolition activities
- B. When unanticipated mechanical, electrical, or structural elements that conflict with intended function or design are encountered, investigate and measure the nature and extent of conflict. Promptly submit a written report to Architect.

### 3.2 UTILITY SERVICES

- A. Existing Utilities: Maintain services indicated to remain and protect them against damage during selective demolition operations.
- B. Do not interrupt existing utilities serving occupied or operating facilities unless authorized in writing by Owner and authorities having jurisdiction. Provide temporary services during interruptions to existing utilities, as acceptable to Owner and to authorities having jurisdiction.

1. Provide at least 72 hours' notice to Owner if shutdown of service is required during changeover.
- C. Utility Requirements: Refer to Division 15 and 16 Sections, where occurs, for shutting off, disconnecting, removing, and sealing or capping utilities. Do not start selective demolition work until utility disconnecting and sealing have been completed and verified in writing.

### 3.3 PREPARATION

- A. Site Access and Temporary Controls:
  1. Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
  2. Erect temporary protection, complying with OSHA requirements such as walks, fences, railings, canopies, and covered passageways, where required by authorities having jurisdiction.
  3. Protect existing site improvements, appurtenances, and landscaping to remain.
- B. Temporary Shoring: Provide and maintain interior and exterior shoring, bracing, or structural support to preserve stability and prevent movement, settlement, or collapse of construction to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.

### 3.4 POLLUTION CONTROLS

- A Disposal: Remove and transport debris using chutes, hoists, covered trucks and etc. to prevent spillage on adjacent surfaces and the occurrence of excessive dust
- B. Cleaning: Return disturbed adjacent areas to existing or better condition before beginning demolition.

### 3.5 SELECTIVE DEMOLITION

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
  1. Dispose of demolished items and materials promptly.
  2. Return elements of construction and surfaces that are to remain to condition existing before selective demolition operations began.
  3. Do not remove more existing roofing than can be covered in one day by new roofing. Refer to applicable Division 7 Section for new roofing requirements.
  4. Do not use cutting torches until work area is cleared of flammable materials. Do not overload structure.

### 3.5 PATCHING AND REPAIRS

- A. General: Promptly repair damage to adjacent construction caused by selective demolition operations.
- B. Repairs: Where repairs are required, patch to produce matching new surfaces without evidence of patching.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

- A. General: Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.
- B. Burning: Do not burn demolished materials.
- C. Disposal: Transport demolished materials off Owner's property and legally dispose of them.

**END OF SECTION 01732**

## **SECTION 01770 - CLOSEOUT PROCEDURES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
  - 1. Inspection procedures.
  - 2. Project Record Documents.
  - 3. Operation and maintenance manuals.
  - 4. Warranties.
  - 5. Instruction of Owner's personnel.
  - 6. Final cleaning.
- B. Related Sections include the following:
  - 1. Division 1 Section "Payment Procedures" for requirements for Applications for Payment for Substantial and Final Completion.
  - 2. Division 1 Section "Construction Progress Documentation" for submitting Final Completion construction photographs and negatives.
  - 3. Division 1 Section "Execution Requirements" for progress cleaning of Project site.
  - 4. Divisions 2 through 16 Sections for specific closeout and special cleaning requirements for products of those Sections.

#### **1.3 SUBSTANTIAL COMPLETION**

- A. Preliminary Procedures: Before requesting inspection for determining date of Substantial Completion, complete the following. List items below that are incomplete in request.
  - 1. Prepare a list of items to be completed and corrected (punch list), the value of items on the list, and reasons why the Work is not complete.
  - 2. Advise Owner of pending insurance changeover requirements.
  - 3. Submit specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
  - 4. Obtain and submit releases permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
  - 5. Prepare and submit Project Record Documents, operation and maintenance manuals, Final Completion construction photographs, damage or settlement surveys, property surveys, and similar final record information.
  - 6. Complete startup testing of systems.
  - 7. Submit test/adjust/balance records.
  - 8. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.

9. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
10. Complete final cleaning requirements, including touchup painting.
11. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.

B. Inspection: Submit a written request for inspection for Substantial Completion. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.

1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for Final Completion.

#### 1.4 FINAL COMPLETION

A. Preliminary Procedures: Before requesting final inspection for determining date of Final Completion, complete the following:

1. Submit a final Application for Payment according to Division 1 Section "Payment Procedures."
2. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems.

B. Inspection: Submit a written request for final inspection for acceptance. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.

1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

#### 1.5 LIST OF INCOMPLETE ITEMS (PUNCH LIST):

A. The Architect will prepare a List Of Incomplete Items (Punch List) and distribute to the contractor for remedial work.

#### 1.6 PROJECT RECORD DOCUMENTS (see Section 1781)

#### 1.7 WARRANTIES

- A. Submittal Time: Submit written warranties at time of Substantial Completion.
- B. Provide additional copies of each warranty to include in maintenance manuals.

## PART 2 - PRODUCTS

### 2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

## PART 3 - EXECUTION

### 3.1 DEMONSTRATION AND TRAINING

- A. Instruction: Instruct Owner's personnel in maintenance of roof systems.

### 3.2 FINAL CLEANING:

- A. Complete the following cleaning operations before requesting inspection for certification of Substantial own forces. Cleaning provisions in the General Conditions are limited to rubbish removal and similar activities.
  - 1. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
  - 2. Remove tools, construction equipment, machinery, and surplus material from Project site.
  - 3. Do not remove or paint over UL, FM and similar labels and nameplates.
- B. Comply with safety standards for cleaning. Do not burn waste materials. Do not bury debris or excess materials on Owner's property. Do not discharge volatile, harmful, or dangerous materials into drainage systems. Remove waste materials from Project site and dispose of lawfully.

**END OF SECTION 01770**

# **SECTION 01781 - PROJECT RECORD DOCUMENTS**

## **PART 1 - GENERAL**

### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 1 Specification Sections, apply to this Section.

### **1.2 SUMMARY**

- A. This Section includes administrative and procedural requirements for Project Record Documents, including the following:
  - 1. Record Drawings.
- B. Related Sections include the following:
  - 1. Division 1 Section "Closeout Procedures" for general closeout procedures.
  - 2. Division 1 Section "Operation and Maintenance Data" for operation and maintenance manual requirements.
  - 3. Divisions 2 through 16 Sections for specific requirements for Project Record Documents of products in those Sections.

### **1.3 SUBMITTALS**

- A. Record Drawings set(s): Submit one set of marked-up Record Prints.

## **PART 2 - PRODUCTS**

### **2.1 RECORD DRAWINGS**

- A. Record Prints: Maintain one set of blue- or black-line white prints of the Contract Drawings and Shop Drawings.
  - 1. Preparation: Mark Record Prints to show the actual installation where installation varies from that shown originally. Require individual or entity that obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to prepare the marked-up Record Prints.
    - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
    - b. Accurately record information in an understandable drawing technique.
    - c. Record data as soon as possible after obtaining it. Record and check the markup before enclosing concealed installations.
  - 2. Content: Types of items requiring marking include, but are not limited to, the following:
    - a. Dimensional changes to Drawings.
    - b. Revisions to details shown on Drawings.
    - c. Locations and depths of underground utilities.

- d. Revisions to routing of piping and conduits.
  - e. Revisions to electrical circuitry.
  - f. Actual equipment locations.
  - g. Duct size and routing.
  - h. Locations of concealed internal utilities.
  - i. Changes made by Change Order or Construction Change Directive.
  - j. Changes made following Architect's written orders.
  - k. Details not on the original Contract Drawings.
  - l. Field records for variable and concealed conditions.
  - m. Record information on the Work that is shown only schematically.
- 3. Mark the Contract Drawings or Shop Drawings, whichever is most capable of showing actual physical conditions, completely and accurately. If Shop Drawings are marked, show cross-reference on the Contract Drawings.
  - 4. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at the same location.
  - 5. Mark important additional information that was either shown schematically or omitted from original Drawings.
  - 6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.
- B. Format: Identify and date each Record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
- 1. Record Prints: Organize Record Prints and newly prepared Record Drawings into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
  - 2. Identification: As follows:
    - a. Project name.
    - b. Date.
    - c. Designation "PROJECT RECORD DRAWINGS."
    - d. Name of Architect.
    - e. Name of Contractor.

## 2.2 MISCELLANEOUS RECORD SUBMITTALS

# PART 3 - EXECUTION

## 3.1 RECORDING AND MAINTENANCE

- A. Recording: Maintain one copy of each submittal during the construction period for Project Record Document purposes. Post changes and modifications to Project Record Documents as they occur; do not wait until the end of Project.
- B. Maintenance of Record Documents and Samples: Store Record Documents and Samples in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to Project Record Documents for Architect's reference during normal working hours.

**END OF SECTION 01781**



## **SECTION 05500 - METAL FABRICATIONS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Steel framing and supports for applications where framing and supports are not specified in other Sections.
  - 2. Miscellaneous metal trim.
  - 3. Unistrut Metal Framing
- B. Related Sections include the following:
  - 1. Division 6 Section "Rough Carpentry" for metal framing anchors and other rough hardware.

#### **1.3 SUBMITTALS**

- A. Shop Drawings: Detail fabrication and erection of each metal fabrication indicated. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items.
- B. Welder Certificate: Submit current certificate that each welder is AWS qualified for the specific type of welding required. Current certificate must be within one year.

#### **1.4 QUALITY ASSURANCE**

- A. Fabricator Qualifications: A firm experienced in producing metal fabrications similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- B. Welding: Qualify procedures and personnel according to the following:
  - 1. AWS D1.1, "Structural Welding Code--Steel."
  - 2. AWS D1.2, "Structural Welding Code--Aluminum."
  - 3. AWS D1.3, "Structural Welding Code--Sheet Steel."
  - 4. Certify that each welder has satisfactorily passed AWS qualification tests for welding processes involved and, if pertinent, has undergone recertification.

#### **1.5 PROJECT CONDITIONS**

- A. Field Measurements: Where metal fabrications are indicated to fit walls and other construction, verify dimensions by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

1. Established Dimensions: Where field measurements cannot be made without delaying the Work, establish dimensions and proceed with fabricating metal fabrications without field measurements. Coordinate construction to ensure that actual dimensions correspond to established dimensions. Allow for trimming and fitting.

## 1.6 COORDINATION

- A. Coordinate installation of anchorages for metal fabrications. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

## PART 2 - PRODUCTS

### 2.1 METALS, GENERAL

- A. Metal Surfaces, General: For metal fabrications exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.

### 2.2 FERROUS METALS

- A. Steel Plates, Shapes, and Bars: ASTM A 36/A 36M.
- B. Cast-in-Place Anchors in Concrete: Anchors of type indicated below, fabricated from corrosion-resistant materials capable of sustaining, without failure, the load imposed within a safety factor of 4, as determined by testing per ASTM E 488, conducted by a qualified independent testing agency.
  1. Threaded or wedge type; galvanized ferrous castings, either ASTM A 47 malleable iron or ASTM A 27/A 27M cast steel. Provide bolts, washers, and shims as needed, hot-dip galvanized per ASTM A 153/A 153M.
- C. Welding Rods and Bare Electrodes: Select according to AWS specifications for metal alloy welded.

### 2.3 PAINT

- A. Shop Primer for Ferrous Metal: Organic zinc-rich primer, complying with SSPC-Paint 20 and compatible with topcoat.
  1. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the following:
    - a. Carboline 621; Carboline Company.
    - b. Aquapon Zinc-Rich Primer 97-670; PPG Industries, Inc.
    - c. Tneme-Zinc 90-97; Tnemec Company, Inc.
- B. Galvanizing Repair Paint: High-zinc-dust-content paint for regalvanizing welds in steel, complying with SSPC-Paint 20.
- C. Bituminous Paint: Cold-applied asphalt mastic complying with SSPC-Paint 12, except containing no asbestos fibers, or cold-applied asphalt emulsion complying with ASTM D 1187.

## 2.4 FASTENERS

- A. General: Provide Type 304 or 316 stainless-steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B 633, Class Fe/Zn 5, where built into exterior walls. Select fasteners for type, grade, and class required.
- B. Bolts and Nuts: Regular hexagon-head bolts, ASTM A 307, Grade A; with hex nuts, ASTM A 563; and, where indicated, flat washers.
- C. Anchor Bolts: ASTM F 1554, Grade 36.
- D. Machine Screws: ASME B18.6.3.
- E. Lag Bolts: ASME B18.2.1.
- F. Wood Screws: Flat head, carbon steel, ASME B18.6.1.
- G. Plain Washers: Round, carbon steel, ASME B18.22.1.
- H. Lock Washers: Helical, spring type, carbon steel, ASME B18.21.1.
- I. Expansion Anchors: Anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to six times the load imposed when installed in unit masonry and equal to four times the load imposed when installed in concrete, as determined by testing per ASTM E 488, conducted by a qualified independent testing agency.
  - 1. Material: Carbon-steel components zinc-plated to comply with ASTM B 633, Class Fe/Zn 5.
  - 2. Material: Alloy Group 1 or 2 stainless-steel bolts complying with ASTM F 593 and nuts complying with ASTM F 594.
- J. Toggle Bolts: FS FF-B-588, tumble-wing type, class and style as needed.

## 2.5 GROUT

- A. Nonshrink, Metallic Grout: Factory-packaged, ferrous-aggregate grout complying with ASTM C 1107, specifically recommended by manufacturer for heavy-duty loading applications.
- B. Nonshrink, Nonmetallic Grout: Factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C 1107. Provide grout specifically recommended by manufacturer for interior and exterior applications.

## 2.6 FABRICATION, GENERAL

- A. Shop Assembly: Preassemble items in shop to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.
- B. Shear and punch metals cleanly and accurately. Remove burrs.
- C. Ease exposed edges to a radius of approximately 1/32 inch, unless otherwise indicated. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.
- D. Weld corners and seams continuously to comply with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
  2. Obtain fusion without undercut or overlap.
  3. Remove welding flux immediately.
  4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.
- E. Provide for anchorage of type indicated; coordinate with supporting structure. Fabricate and space anchoring devices to secure metal fabrications rigidly in place and to support indicated loads.
- F. Cut, reinforce, drill, and tap metal fabrications as indicated to receive finish hardware, screws, and similar items.
- G. Fabricate joints that will be exposed to weather in a manner to exclude water, or provide weep holes where water may accumulate.
- H. Allow for thermal movement resulting from the following maximum change (range) in ambient and surface temperatures by preventing buckling, opening up of joints, overstressing of components, failure of connections, and other detrimental effects. Base engineering calculation on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.
- I. Form exposed work true to line and level with accurate angles and surfaces and straight sharp edges.
- J. Remove sharp or rough areas on exposed traffic surfaces.
- K. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners where possible. Use exposed fasteners of type indicated or, if not indicated, Phillips flat-head (countersunk) screws or bolts. Locate joints where least conspicuous.

## 2.7 MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Provide steel framing and supports indicated and as necessary to complete the Work.
- B. Fabricate units from structural-steel shapes, plates, and bars of welded construction, unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction retained by framing and supports. Cut, drill, and tap units to receive hardware, hangers, and similar items.
1. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors 1-1/4 inches wide by 1/4 inch thick by 8 inches long at 24 inches o.c., unless indicated otherwise on the Drawings.
  2. Furnish inserts if units must be installed after concrete is placed.
- C. Galvanize miscellaneous framing and supports where indicated.

## 2.8 UNISTRUT METAL FRAMING

- A. General: Fabricate Unistrut system for locations shown, with dimensions, spacings, details, and anchorages as indicated.
1. Provide all Unistrut metal framing material, fittings and related accessories as indicated on the contract drawings.
  2. Provide all labor, supervision, engineering and fabrication required for installation of the strut system in accordance with the contract drawings and as specified herein.

3. All Strut System components must be supplied by a single manufacturer.

B. ACCEPTABLE MANUFACTURERS:

1. All Strut System components shall be as manufactured by Unistrut Corporation or approved equal as determined by the Architect or Engineer of record in writing 10 days prior to bid date.

C. MATERIALS:

1. All channel members shall be fabricated from structural grade steel conforming to one of the following ASTM specifications:

a. A 570, GR 33, A 653 or GR 35.

2. All fittings shall be fabricated from steel conforming to one of the following ASTM specifications:

a. A 575, A 576, A 36 or A 635.

D. FINISHES:

1. Strut System components shall be finished in accordance with the following standards:

a. Pre-Galvanized (PG).

1) Zinc coated by hot-dipped process prior to roll forming. The zinc weight shall be G90 conforming to ASTM A 653.

2.9 MISCELLANEOUS STEEL TRIM

A. Unless otherwise indicated, fabricate units from structural-steel shapes, plates, and bars of profiles shown with continuously welded joints, and smooth exposed edges. Miter corners and use concealed field splices where possible.

B. Provide cutouts, fittings, and anchorages as needed to coordinate assembly and installation with other work. Provide anchors, welded to trim, for embedding in concrete or masonry construction, spaced not more than 6 inches from each end, 6 inches from corners, and 24 inches o.c., unless otherwise indicated.

2.10 FINISHES, GENERAL

A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

B. Finish metal fabrications after assembly.

2.11 STEEL AND IRON FINISHES

A. Galvanizing: Hot-dip galvanize items as indicated to comply with applicable standard listed below:

1. ASTM A 123, for galvanizing steel and iron products.

2. ASTM A 153/A 153M, for galvanizing steel and iron hardware.

B. Preparation for Shop Priming: Prepare uncoated ferrous-metal surfaces to comply with minimum requirements indicated below for SSPC surface-preparation specifications and environmental exposure conditions of installed metal fabrications:

**METAL FABRICATIONS**

1. Exteriors (SSPC Zone 1B): SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
  2. Interiors (SSPC Zone 1A): SSPC-SP 3, "Power Tool Cleaning."
- C. Apply shop primer to uncoated surfaces of metal fabrications, except those with galvanized finishes and those to be embedded in concrete, sprayed-on fireproofing, or masonry, unless otherwise indicated. Comply with SSPC-PA 1, "Paint Application Specification No. 1," for shop painting.
1. Stripe paint corners, crevices, bolts, welds, and sharp edges.

## PART 3 - EXECUTION

### 3.1 INSTALLATION, GENERAL

- A. Fastening to In-Place Construction: Provide anchorage devices and fasteners where necessary for securing metal fabrications to in-place construction. Include threaded fasteners for concrete and masonry inserts, toggle bolts, through-bolts, lag bolts, wood screws, and other connectors.
- B. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.
- C. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.
- D. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.
- E. Field Welding: Comply with the following requirements:
1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
  2. Obtain fusion without undercut or overlap.
  3. Remove welding flux immediately.
  4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.
- F. Corrosion Protection: Coat concealed surfaces of aluminum that will come into contact with grout, concrete, masonry, wood, or dissimilar metals with a heavy coat of bituminous paint.

### 3.2 INSTALLING MISCELLANEOUS FRAMING AND SUPPORTS

- A. General: Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings, if any.

### 3.3 ADJUSTING AND CLEANING

- A. Touchup Painting: Immediately after erection, clean field welds, bolted connections, and abraded areas of shop paint, and paint exposed areas with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.
1. Apply by brush or spray to provide a minimum 2.0-mil dry film thickness.

- B. Touchup Painting: Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Division 9 Section "Painting."
- C. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780.

**END OF SECTION 05500**

## **SECTION 06100 - ROUGH CARPENTRY**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Rooftop equipment bases and support curbs.
  - 2. Wood blocking, cants, and nailers.

#### **1.3 DEFINITIONS**

- A. Rough Carpentry: Carpentry work not specified in other Sections and not exposed, unless otherwise indicated.
- B. Lumber grading agencies, and the abbreviations used to reference them, include the following:
  - 1. NLGA - National Lumber Grades Authority.
  - 2. WCLIB - West Coast Lumber Inspection Bureau.
  - 3. WWPA - Western Wood Products Association.

#### **1.4 SUBMITTALS**

- A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.
  - 1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Indicate type of preservative used, net amount of preservative retained, and chemical treatment manufacturer's written instructions for handling, storing, installing, and finishing treated material.
  - 2. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.
  - 3. Include copies of warranties from chemical treatment manufacturers for each type of treatment.

#### **1.5 DELIVERY, STORAGE, AND HANDLING**

- A. Stack lumber, plywood, and other panels; place spacers between each bundle to provide air circulation. Provide for air circulation around stacks and under canvas coverings.

### **PART 2 - PRODUCTS**



## 2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: DOC PS 20 and applicable rules of lumber grading agencies certified by the American Lumber Standards Committee Board of Review.
  - 1. Factory mark each piece of lumber with grade stamp of grading agency.
  - 2. Where nominal sizes are indicated, provide actual sizes required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry lumber.
  - 3. Provide dressed lumber, S4S, unless otherwise indicated.
  - 4. Provide dry lumber with 19 percent maximum moisture content at time of dressing for 2-inch nominal thickness or less, unless otherwise indicated.
  - 5. Provide dry lumber with 15 percent maximum moisture content at time of dressing for 2-inch nominal thickness or less, unless otherwise indicated.
- B. Wood Structural Panels:
  - 1. Plywood: Either DOC PS 1 or DOC PS 2, unless otherwise indicated.
  - 2. Oriented Strand Board: DOC PS 2.
  - 3. Thickness: As needed to comply with requirements specified but not less than thickness indicated.
  - 4. Comply with "Code Plus" provisions in APA Form No. E30K, "APA Design/Construction Guide: Residential & Commercial."
  - 5. Factory mark panels according to indicated standard.

## 2.2 WOOD-PRESERVATIVE-TREATED MATERIALS

- A. Preservative Treatment by Pressure Process: AWP C2 (lumber) and AWP C9 (plywood), except that lumber that is not in contact with the ground and is continuously protected from liquid water may be treated according to AWP C31 with inorganic boron (SBX).
  - 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and one of the following:
    - a. Chromated copper arsenate (CCA).
    - b. Ammoniacal copper zinc arsenate (ACZA).
    - c. Ammoniacal, or amine, copper quat (ACQ).
    - d. Copper bis (dimethyldithiocarbamate) (CDDC).
    - e. Ammoniacal copper citrate (CC).
    - f. Copper azole, Type A (CBA-A).
    - g. Oxine copper (copper-8-quinolinolate) in a light petroleum solvent.
- B. Kiln-dry material after treatment to a maximum moisture content of 19 percent for lumber and 15 percent for plywood. Do not use material that is warped or does not comply with requirements for untreated material.
- C. Mark each treated item with the treatment quality mark of an inspection agency approved by the American Lumber Standards Committee Board of Review.
- D. Application: Treat items indicated on Drawings, and the following:
  - 1. Wood cants, nailers, curbs, equipment support bases, blocking, stripping, and similar members in connection with roofing, flashing, vapor barriers, and waterproofing.

## 2.3 MISCELLANEOUS LUMBER

- A. General: Provide lumber for support or attachment of other construction, including the following:
  - 1. Rooftop equipment bases and support curbs.
  - 2. Blocking.
  - 3. Cants.
  - 4. Nailers.
- B. For items of dimension lumber size, provide Construction, Stud, or No. 2 grade lumber with 19 percent maximum moisture content and the following species:
  - 1. Hem-fir or Hem-fir (north); NLGA, WCLIB, or WWPA.
- C. For concealed boards, provide lumber with 19 percent maximum moisture content and the following species and grades:
  - 1. Hem-fir or Hem-fir (north), Construction or 2 Common grade; NLGA, WCLIB, or WWPA.

## 2.4 FASTENERS

- A. General: Provide fasteners of size and type indicated that comply with requirements specified in this Article for material and manufacture.
  - 1. Where rough carpentry is exposed to weather, in ground contact, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A 153/A 153M.
- B. Nails, Brads, and Staples: ASTM F 1667.
- C. Power-Driven Fasteners: CABO NER-272.
- D. Wood Screws: ASME B18.6.1.
- E. Screws for Fastening to Cold-Formed Metal Framing: ASTM C 954, except with wafer heads and reamer wings, length as recommended by screw manufacturer for material being fastened.
- F. Lag Bolts: ASME B18.2.1.
- G. Bolts: Steel bolts complying with ASTM A 307, Grade A; with ASTM A 563 hex nuts and, where indicated, flat washers.
- H. Expansion Anchors: Anchor bolt and sleeve assembly of material indicated below with capability to sustain, without failure, a load equal to 6 times the load imposed when installed in unit masonry assemblies and equal to 4 times the load imposed when installed in concrete as determined by testing per ASTM E 488 conducted by a qualified independent testing and inspecting agency.
  - 1. Material: Carbon-steel components, zinc plated to comply with ASTM B 633, Class Fe/Zn 5.
  - 2. Material: Stainless steel with bolts and nuts complying with ASTM F 593 and ASTM F 594, Alloy Group 1 or 2.

## 2.5 METAL FRAMING ANCHORS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- C. Basis-of-Design Products: Subject to compliance with requirements, provide products indicated on Drawings or comparable products by one of the following:
  - 1. Alpine Engineered Products, Inc.
  - 2. Cleveland Steel Specialty Co.
  - 3. Harlen Metal Products, Inc.
  - 4. KC Metals Products, Inc.
  - 5. Simpson Strong-Tie Co., Inc.
  - 6. Southeastern Metals Manufacturing Co., Inc.
  - 7. USP Structural Connectors.
- D. Allowable Design Loads: Provide products with allowable design loads, as published by manufacturer, that meet or exceed those of products of manufacturers listed. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency.
- E. Galvanized Steel Sheet: Hot-dip, zinc-coated steel sheet complying with ASTM A 653/A 653M, G60 coating designation.
  - 1. Use for interior locations where stainless steel is not indicated.
- F. Joist Hangers: U-shaped joist hangers with 2-inch- long seat and 1-1/4-inch- wide nailing flanges at least 85 percent of joist depth.
  - 1. Thickness: 0.062 inch.

## PART 3 - EXECUTION

### 3.1 INSTALLATION, GENERAL

- A. Set rough carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry to other construction; scribe and cope as needed for accurate fit. Locate nailers, blocking, and similar supports to comply with requirements for attaching other construction.
- B. Do not use materials with defects that impair quality of rough carpentry or pieces that are too small to use with minimum number of joints or optimum joint arrangement.
- C. Apply field treatment complying with AWWPA M4 to cut surfaces of preservative-treated lumber and plywood.
- D. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
  - 1. CABO NER-272 for power-driven fasteners.
  - 2. Published requirements of metal framing anchor manufacturer.
  - 3. Table 23-II-B-1, "Nailing Schedule," and Table 23-II-B-2, "Wood Structural Panel Roof Sheathing Nailing Schedule," in the Uniform Building Code.
- E. Use common wire nails, unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood; predrill as required.

- F. Use finishing nails for exposed work, unless otherwise indicated. Countersink nail heads and fill holes with wood filler.

### 3.2 WOOD SLEEPER, BLOCKING, AND NAILER INSTALLATION

- A. Install where indicated and where required for attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.
- B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces, unless otherwise indicated. Build anchor bolts into masonry during installation of masonry work. Where possible, secure anchor bolts to formwork before concrete placement.

**END OF SECTION 06100**

## **SECTION 07540 - THERMOPLASTIC MEMBRANE ROOFING**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Mechanically fastened membrane roofing system.
  - 2. Roof insulation.
- B. Related Sections include the following:
  - 1. Division 6 Section "Rough Carpentry" for wood nailers, curbs, and blocking.
  - 2. Division 7 Section "Sheet Metal Flashing and Trim" for metal roof penetration flashings, flashings, and counterflashings.
  - 3. Division 7 Section "Joint Sealants."

#### **1.3 DEFINITIONS**

- A. Roofing Terminology: Refer to ASTM D 1079 and glossary of NRCA's "The NRCA Roofing and Waterproofing Manual" for definition of terms related to roofing work in this Section.
- B. Design Uplift Pressure: The uplift pressure, calculated according to procedures in SPRI's "Wind Load Design Guide for Fully Adhered and Mechanically Fastened Roofing Systems," before multiplication by a safety factor.
- C. Factored Design Uplift Pressure: The uplift pressure, calculated according to procedures in SPRI's "Wind Load Design Guide for Fully Adhered and Mechanically Fastened Roofing Systems," after multiplication by a safety factor.

#### **1.4 PERFORMANCE REQUIREMENTS**

- A. General: Provide installed roofing membrane and base flashings that remain watertight; do not permit the passage of water; and resist specified uplift pressures, thermally induced movement, and exposure to weather without failure.
- B. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by roofing membrane manufacturer based on testing and field experience.

- C. Roofing System Design: Provide a membrane roofing system that is identical to systems that have been successfully tested by a qualified testing and inspecting agency to resist uplift pressure calculated according to ASCE 7.
  - 1. Corner Uplift Pressure: 25 lbf/sq. ft. (200 min. s.f.)
  - 2. Perimeter Uplift Pressure: 25 lbf/sq. ft. (10' min. width)
  - 3. Field-of-Roof Uplift Pressure: 22 lbf/sq. ft.
- D. FMG Listing: Provide roofing membrane, base flashings, and component materials that comply with requirements in FMG 4450 and FMG 4470 as part of a membrane roofing system and that are listed in FMG's "Approval Guide" for Class 1 or noncombustible construction, as applicable. Identify materials with FMG markings.
  - 1. Fire/Windstorm Classification: Class 1A- 90.
  - 2. Hail Resistance: MH.

#### 1.5 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For roofing system. Include plans, elevations, sections, details, and attachments to other Work.
  - 1. Base flashings and membrane terminations.
  - 2. Tapered insulation, including slopes.
  - 3. Insulation fastening patterns.

#### 1.6 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified firm that is approved, authorized, or licensed by roofing system manufacturer to install manufacturer's product and that is eligible to receive manufacturer's warranty.
- B. Installer must also be on the pre-selected list previously selected by the Owner.
- C. Manufacturer Qualifications: A qualified manufacturer that has UL listing and FMG approval for membrane roofing system identical to that used for this Project. See part 2 for other qualification requirements.
- D. Testing Agency Qualifications: An independent testing agency with the experience and capability to conduct the testing indicated, as documented according to ASTM E 548.
- E. Source Limitations: Obtain components for membrane roofing system from or approved by roofing membrane manufacturer.
- F. Fire-Test-Response Characteristics: Provide membrane roofing materials with the fire-test-response characteristics indicated as determined by testing identical products per test method below by UL, FMG, or another testing and inspecting agency acceptable to authorities having jurisdiction. Materials shall be identified with appropriate markings of applicable testing and inspecting agency.
  - 1. Exterior Fire-Test Exposure: Class A; ASTM E 108, for application and roof slopes indicated.
  - 2. Fire-Resistance Ratings: ASTM E 119, for fire-resistance-rated roof assemblies of which roofing system is a part.

## 1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, and directions for storing and mixing with other components.
- B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.
  - 1. Discard and legally dispose of liquid material that cannot be applied within its stated shelf life.
- C. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location. Comply with insulation manufacturer's written instructions for handling, storing, and protecting during installation.
- D. Handle and store roofing materials and place equipment in a manner to avoid permanent deflection of deck.

## 1.8 PROJECT CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.

## 1.9 WARRANTY

- A. Special Warranty: See attached "GUARANTEE FOR SINGLE PLY ROOFING" included in the Owner's RFP. (This document can also be found on the State/DFCM web site.)
- B. Special Project Warranty: See attached "CONTRACTOR ROOFING WARRANTY" included in the Owner's RFP. (This document can also be found on the State/DFCM web site.)

## PART 2 - PRODUCTS

### 2.1 MANUFACTURERS

- A. In other Part 2 articles where titles below introduce lists, the following requirements apply for product selection:
  - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the manufacturers specified.

### 2.2 PVC ROOFING MEMBRANE

- A. PVC Sheet: ASTM D 4434, Type III, fabric reinforced.
  - 1. Manufacturers:

- a. Manufacture must be listed in NRCA's low slope roofing materials guide.
- b. Manufacture must have a successful 15-year history.
- c. Manufacture must agree to and be willing to sign the appropriate State of Utah (DFCM) manufacturers warranty for the roofing system.
- d. Manufacturer will provide at no additional cost to Owner, progress inspections as conditions require and a final warranty inspection at project completion by a full-time technical representative.

## 2. PVC Requirements

- a. 15-year minimum performance history
- b. No documented failures in the above 15 year history
- c. Only balanced sheets will be acceptable. Scrim must be in center of membrane with no less than 20 mils polymer above scrim.
- d. Only sheets that use an extrusion or spread coating manufacturing process will be acceptable.
- e. Thickness: 60 mils (57 mil minimum) polymer thickness not over all thickness.
- f. Exposed Face Color: White.

## 2.3 AUXILIARY MATERIALS

- A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with membrane roofing.
  - 1. Liquid-type auxiliary materials shall meet VOC limits of authorities having jurisdiction.
- B. Sheet Flashing: Manufacturer's standard sheet flashing of same material, type, reinforcement, thickness, and color as PVC sheet membrane.
- C. Bonding Adhesive: Manufacturer's standard solvent-based bonding adhesive for membrane, and solvent-based bonding adhesive for base flashings.
- D. Metal Termination Bars: Manufacturer's standard predrilled stainless-steel or aluminum bars, approximately 1 by 1/8 inch thick; with anchors.
- E. Metal Battens: Manufacturer's standard aluminum-zinc-alloy-coated or zinc-coated steel sheet, approximately 1 inch wide by 0.05 inch thick, pre-punched.
- F. Fasteners: Factory-coated steel fasteners and metal or plastic plates meeting corrosion-resistance provisions in FMG 4470, designed for fastening membrane to substrate, and acceptable to membrane roofing system manufacturer.
- G. Miscellaneous Accessories: Provide pourable sealers, preformed cone and vent sheet flashings, preformed inside and outside corner sheet flashings, T-joint covers, termination reglets, cover strips, and other accessories.

## 2.4 ROOF INSULATION

- A. General: Provide preformed roof insulation boards that comply with requirements and referenced standards, selected from manufacturer's standard sizes and of thicknesses indicated.
- B. Polyisocyanurate Board Insulation: ASTM C 1289, Type II, felt or glass-fiber mat facer on both major surfaces. ***R-20 Min.***



1. Available Manufacturers:

- a. Atlas Roofing Corporation.
- b. Carlisle SynTec Incorporated.
- c. Celotex Corporation.
- d. Firestone Building Products Company.
- e. GAF Materials Corporation.
- f. GenFlex Roofing Systems.
- g. Johns Manville International, Inc.
- h. RMAX.

- C. Tapered Insulation: Provide factory-tapered insulation boards fabricated to slope of 1/4 inch per 12 inches, unless otherwise indicated.
- D. Provide preformed saddles, crickets, tapered edge strips, and other insulation shapes where indicated for sloping to drain. Fabricate to slopes indicated.

2.5 INSULATION ACCESSORIES

- A. General: Roof insulation accessories recommended by insulation manufacturer for intended use and compatible with membrane roofing.
- B. Fasteners: Factory-coated steel fasteners and metal or plastic plates meeting corrosion-resistance provisions in FMG 4470, designed for fastening roof insulation to substrate, and acceptable to roofing system manufacturer.

2.6 WALKWAYS

- A. Flexible Walkways: Factory-formed, nonporous, heavy-duty, solid-rubber, slip-resisting, surface-textured walkway pads or rolls, approximately 3/16 inch thick, and acceptable to membrane roofing system manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with the following requirements and other conditions affecting performance of roofing system:
  - 1. Verify that roof openings and penetrations are in place and set and braced and that roof drains are securely clamped in place.
  - 2. Verify that wood blocking, curbs, and nailers are securely anchored to roof deck at penetrations and terminations and that nailers match thicknesses of insulation.
  - 3. Verify that surface plane flatness and fastening of steel roof deck comply with requirements in Division 5 Section "Steel Deck."
  - 4. Verify that minimum concrete drying period recommended by roofing system manufacturer has passed.
  - 5. Verify that concrete substrate is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method according to ASTM D 4263.
  - 6. Verify that concrete curing compounds that will impair adhesion of roofing components to roof deck have been removed.

7. Proceed with installation only after unsatisfactory conditions have been corrected.

### 3.2 PREPARATION

- A. Clean substrate of dust, debris, moisture, and other substances detrimental to roofing installation according to roofing system manufacturer's written instructions. Remove sharp projections.
- B. Prevent materials from entering and clogging roof drains and conductors and from spilling or migrating onto surfaces of other construction. Remove roof-drain plugs when no work is taking place or when rain is forecast.
- C. Complete terminations and base flashings and provide temporary seals to prevent water from entering completed sections of roofing system at the end of the workday or when rain is forecast. Remove and discard temporary seals before beginning work on adjoining roofing.
- D. Install acoustical roof deck rib insulation strips, specified in Division 5 Section "Steel Deck," according to acoustical roof deck manufacturer's written instructions.

### 3.3 INSULATION INSTALLATION

- A. Coordinate installing membrane roofing system components so insulation is not exposed to precipitation or left exposed at the end of the workday.
- B. Comply with membrane roofing system manufacturer's written instructions for installing roof insulation.
- C. Install tapered insulation under area of roofing to conform to slopes indicated.
- D. Install one or more layers of insulation under area of roofing to achieve required thickness. Where overall insulation thickness is 1-1/2 inches or greater, install 2 or more layers with joints of each succeeding layer staggered from joints of previous layer a minimum of 6 inches in each direction.
- E. Trim surface of insulation where necessary at roof drains so completed surface is flush and does not restrict flow of water.
- F. Install insulation with long joints of insulation in a continuous straight line with end joints staggered between rows, abutting edges and ends between boards. Fill gaps exceeding 1/4 inch with insulation.
  1. Cut and fit insulation within 1/4 inch of nailers, projections, and penetrations.
- G. Mechanically Fastened Insulation: Install each layer of insulation and secure to deck using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to deck type.
  1. Fasten insulation according to requirements in FMG's "Approval Guide" for specified Windstorm Resistance Classification.

### 3.4 MECHANICALLY FASTENED ROOFING MEMBRANE INSTALLATION

- A. Install roofing membrane over area to receive roofing according to roofing system manufacturer's written instructions. Unroll roofing membrane and allow to relax before installing.
  1. Install sheet according to ASTM D 5082.

- B. Start installation of roofing membrane in presence of roofing system manufacturer's technical personnel.
- C. Accurately align roofing membranes and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.
- D. Mechanically or adhesively fasten roofing membrane securely at terminations, penetrations, and perimeter of roofing.
- E. Apply roofing membrane with side laps shingled with slope of roof deck where possible.
- F. Seams: Clean seam areas, overlap roofing membrane, and hot-air weld side and end laps of roofing membrane according to manufacturer's written instructions to ensure a watertight seam installation.
  - 1. Test lap edges with probe to verify seam weld continuity. Apply lap sealant to seal cut edges of roofing membrane.
  - 2. Verify field strength of seams a minimum of twice daily and repair seam sample areas.
  - 3. Repair tears, voids, and lapped seams in roofing membrane that does not meet requirements.
- G. Spread sealant or mastic bed over deck drain flange at deck drains and securely seal roofing membrane in place with clamping ring.
- H. In-Splice Attachment: Secure one edge of roofing membrane using fastening plates or metal battens centered within membrane splice and mechanically fasten roofing membrane to roof deck. Field-splice seam.
- I. Install roofing membrane and auxiliary materials to tie in to existing roofing.

### 3.5 BASE FLASHING INSTALLATION

- A. Install sheet flashings and preformed flashing accessories and adhere to substrates according to membrane roofing system manufacturer's written instructions.
- B. Apply solvent-based bonding adhesive to substrate and underside of sheet flashing at required rate and allow to partially dry. Do not apply bonding adhesive to seam area of flashing.
- C. Flash penetrations and field-formed inside and outside corners with sheet flashing.
- D. Clean seam areas and overlap and firmly roll sheet flashings into the adhesive. Weld side and end laps to ensure a watertight seam installation.
- E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

### 3.6 WALKWAY INSTALLATION

- A. Flexible Walkways: Install walkway products in locations indicated. Heat weld to substrate or adhere walkway products to substrate with compatible adhesive according to roofing system manufacturer's written instructions.

### 3.7 FIELD QUALITY CONTROL

- A. Testing Agency: Owner will engage a qualified independent testing and inspecting agency to perform roof tests and inspections and to prepare test reports.

- B. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion and submit report to Architect.
  - 1. Notify Architect or Owner 48 hours in advance of date and time of inspection.
- C. Repair or remove and replace components of membrane roofing system where test results or inspections indicate that they do not comply with specified requirements.
- D. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

### 3.8 PROTECTING AND CLEANING

- A. Protect membrane roofing system from damage and wear during remainder of construction period. When remaining construction will not affect or endanger roofing, inspect roofing for deterioration and damage, describing its nature and extent in a written report, with copies to Architect and Owner.
- B. Correct deficiencies in or remove membrane roofing system that does not comply with requirements, repair substrates, and repair or reinstall membrane roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.
- C. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

**END OF SECTION 07540**

## **SECTION 07620 - SHEET METAL FLASHING AND TRIM**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes sheet metal flashing and trim in the following categories:
  - 1. Roof-drainage systems.
  - 2. Exposed trim, gravel stops, and fascia.
  - 3. Copings.
  - 4. Metal flashing.
  - 5. Reglets.
- B. Related Sections: The following Sections contain requirements that relate to this Section:
  - 1. Division 7 Section "Roof Accessories" for set-on-type curbs, equipment supports, roof hatches, vents, and other manufactured roof accessory units.
  - 2. Division 7 Section "Joint Sealants" for elastomeric sealants.
  - 3. Division 7 Roofing Sections for flashing and roofing accessories installed integral with roofing membrane as part of roofing-system work.

#### **1.3 PERFORMANCE REQUIREMENTS**

- A. General: Install sheet metal flashing and trim to withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failing.
- B. Fabricate and install roof edge flashing and copings capable of resisting the following forces:
  - 1. Exposure type "C" – Importance factor 1 – Capable of withstanding wind velocity of 90 mph for a 3 second gust.

#### **1.4 SUBMITTALS**

- A. General: Submit each item in this Article according to the Conditions of the Contract and Division 1 Specification Sections.
- B. Product Data including manufacturer's material and finish data, installation instructions, and general recommendations for each specified flashing material and fabricated product.
- C. Shop Drawings of each item specified showing layout, profiles, methods of joining, and anchorage details.

## 1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Engage an experience Installer who has completed sheet metal flashing and trim work similar in material, design, and extent to that indicated for this Project and with a record of successful in-service performance.

## 1.6 PROJECT CONDITIONS

- A. Coordinate Work of this Section with interfacing and adjoining Work for proper sequencing of each installation. Ensure best possible weather resistance, durability of Work, and protection of materials and finishes.
- B. FACTORY FINISHED COLOR COATING WARRANTY:
- C. Provide 20 year NDL Factory Finish Color Coating Warranty as follows:
  - 1. Color change: less than 5-Delta-E (Hunter) units per ASTM D2244-85.
  - 2. Chalking : less than No. 8 per ASTM D659-86.
  - 3. Film integrity: no cracking or delamination.

## PART 2 - PRODUCTS

### 2.1 METALS

- A. Color coated steel: Fluoropolymer coating factory applied to 24 gage commercial quality, extra smooth, AISI G90, hot dipped galvanized steel, ASTM A 446-76, Grade A, primed and finished one side with fluoropolymer coating, 1.0 plus or minus 0.1 mil total dry film thickness and a wash coat of 0.3 to 0.4 mil dry film thickness applied to reverse side.
- B. Zinc-Coated Steel: Commercial quality with 0.20% copper, ASTM A 525 except use ASTM A 527 for lock-forming G90 hot-dip galvanized, mill phosphatized where indicated for painting; 0.0359" thick (20 gage) except as otherwise indicated. Treat with copper acetate solution and shop coat of gray zinc dust primer, Federal Specification TT-P-641e, Type II, to be used at locations specifically indicated.
- C. Lead-Coated Copper: ASTM B 101, cold-rolled copper sheet, not less than 20 oz./sq. ft., both sides coated with lead weighing not less than 12 nor more than 15 lb/100 sq. ft., unless otherwise indicated.
- D. Aluminum-Zinc Alloy-Coated Steel Sheet: ASTM A 792, Class AZ-50 coating, Grade 40 or to suit project conditions, with 55 percent aluminum, not less than 0.0396 inch thick, unless otherwise indicated.
- E. Lead Sheet: ASTM B 749, Type L51121, copper-bearing lead sheet, with a minimum thickness of 0.0625 inch except not less than 0.0937 inch thick for applications where burning (welding) is involved.

### 2.2 REGLETS

- A. General: Units of type, material, and profile indicated, formed to provide secure interlocking of separate reglet and counterflashing pieces and compatible with flashing indicated.
- B. Surface-Mounted Type: Provide with slotted holes for fastening to substrate, with neoprene or other suitable weatherproofing washers, and with channel for sealant at top edge.

- C. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated in the Work include, but are not limited to, the following:

1. Fry Reglet Corporation.
2. Hickman: W.P. Hickman Co.
3. Keystone Flashing Company.

## 2.3 FACTORY FINISH COLOR COATING PRODUCTS:

- A. Hylar 5000
- B. Kynar 500.

## 2.4 MISCELLANEOUS MATERIALS AND ACCESSORIES

- A. Burning Rod for Lead: Same composition as lead sheet.
- B. Solder: ASTM B 32, Grade Sn50, used with rosin flux.
- C. Fasteners: Same metal as sheet metal flashing or other noncorrosive metal as recommended by sheet metal manufacturer. Match finish of exposed heads with material being fastened.
- D. Asphalt Mastic: SSPC-Paint 12, solvent-type asphalt mastic, nominally free of sulfur and containing no asbestos fibers, compounded for 15-mil dry film thickness per coat.
- E. Mastic Sealant: Polyisobutylene; nonhardening, nonskinning, nondrying, nonmigrating sealant.
- F. Elastomeric Sealant: Generic type recommended by sheet metal manufacturer and fabricator of components being sealed and complying with requirements for joint sealants as specified in Division 7 Section "Joint Sealants."
- G. Epoxy Seam Sealer: 2-part, noncorrosive, aluminum seam-cementing compound, recommended by aluminum manufacturer for exterior and interior nonmoving joints, including riveted joints.
- H. Adhesives: Type recommended by flashing sheet metal manufacturer for waterproof and weather-resistant seaming and adhesive application of flashing sheet metal.
- I. Metal Accessories: Provide sheet metal clips, straps, anchoring devices, and similar accessory units as required for installation of Work, matching or compatible with material being installed; noncorrosive; size and thickness required for performance.
- J. Roofing Cement: ASTM D 4586, Type I, asbestos free, asphalt based.

## 2.5 FABRICATION, GENERAL

- A. Sheet Metal Fabrication Standard: Fabricate sheet metal flashing and trim to comply with recommendations of SMACNA's "Architectural Sheet Metal Manual" that apply to the design, dimensions, metal, and other characteristics of the item indicated.
- B. Comply with details shown to fabricate sheet metal flashing and trim that fit substrates and result in waterproof and weather-resistant performance once installed. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.

- C. Form exposed sheet metal Work that is without excessive oil canning, buckling, and tool marks and that is true to line and levels indicated, with exposed edges folded back to form hems.
- D. Seams: Fabricate nonmoving seams in sheet metal with flat-lock seams. Tin edges to be seamed, form seams, and solder.
- E. Expansion Provisions: Space movement joints at maximum of 10 feet with no joints allowed within 24 inches of corner or intersection. Where lapped or bayonet-type expansion provisions in Work cannot be used or would not be sufficiently weatherproof and waterproof, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with mastic sealant (concealed within joints).
- F. Sealed Joints: Form non-expansion, but movable, joints in metal to accommodate elastomeric sealant to comply with SMACNA standards.
- G. Separate metal from noncompatible metal or corrosive substrates by coating concealed surfaces at locations of contact with asphalt mastic or other permanent separation as recommended by manufacturer.
- H. Conceal fasteners and expansion provisions where possible. Exposed fasteners are not allowed on faces of sheet metal exposed to public view.
- I. Fabricate cleats and attachment devices from same material as sheet metal component being anchored or from compatible, noncorrosive metal recommended by sheet metal manufacturer.
  - 1. Size: As recommended by SMACNA manual or sheet metal manufacturer for application but never less than thickness of metal being secured.

## 2.6 SHEET METAL FABRICATIONS

- A. General: Fabricate sheet metal items in thickness or weight needed to comply with performance requirements but not less than that listed below for each application and metal.
- B. Roof-Drain Flashing: Fabricate from the following material:
  - 1. Lead: 4.0 lb/sq. ft., hard tempered.
- C. Scuppers: Fabricate from the following material:
  - 1. Lead-Coated Copper: 16 oz./sq. ft..
  - 2. Galvanized Steel: 0.0276 inch thick.
- D. Exposed Trim, Gravel Stops, and Fasciae: Fabricate from the following material:
  - 1. Aluminum-Zinc Alloy-Coated Steel: 0.0276 inch thick.
- E. Copings: Fabricate from the following material:
  - 1. Aluminum-Zinc Alloy-Coated Steel: 0.0396 inch thick.
- F. Counterflashing: Fabricate from the following material:
  - 1. Galvanized Steel: 0.0217 inch thick.
- G. Flashing Receivers: Fabricate from the following material:



1. Galvanized Steel: 0.0217 inch thick.
- H. Roof-Penetration Flashing: Fabricate from the following material:
1. Lead: 4.0 lb/sq. ft., hard tempered.
  2. Galvanized Steel: 0.0276 inch thick.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine substrates and conditions under which sheet metal flashing and trim are to be installed and verify that Work may properly commence. Do not proceed with installation until unsatisfactory conditions have been corrected.

### 3.2 FACTORY FINISH COLOR COATING UAGAGE:

- A. Factory Finish Color Coated metal shall be used at all locations that are visible to pedestrian traffic and other locations as specifically indicated on the Drawings.

### 3.3 INSTALLATION

- A. General: Unless otherwise indicated, install sheet metal flashing and trim to comply with performance requirements, manufacturer's installation instructions, and SMACNA's "Architectural Sheet Metal Manual." Anchor units of Work securely in place by methods indicated, providing for thermal expansion of metal units; conceal fasteners where possible, and set units true to line and level as indicated. Install Work with laps, joints, and seams that will be permanently watertight and weatherproof.
- B. Install exposed sheet metal Work that is without excessive oil canning, buckling, and tool marks and that is true to line and levels indicated, with exposed edges folded back to form hems. Install sheet metal flashing and trim to fit substrates and to result in waterproof and weather-resistant performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
- C. Roof-Edge Flashings: Secure metal flashings at roof edges according to FM Loss Prevention Data Sheet 1-49 for specified wind zone.
- D. Expansion Provisions: Provide for thermal expansion of exposed sheet metal Work. Space movement joints at maximum of 10 feet with no joints allowed within 24 inches of corner or intersection. Where lapped or bayonet-type expansion provisions in Work cannot be used or would not be sufficiently weatherproof and waterproof, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with mastic sealant (concealed within joints).
- E. Soldered Joints: Clean surfaces to be soldered, removing oils and foreign matter. Pretin edges of sheets to be soldered to a width of 1-1/2 inches, except where pretinned surface would show in finished Work.
1. Pretinching is not required for the following metals:
    - a. Lead.
    - b. Lead-coated copper.

2. Do not use torches for soldering. Heat surfaces to receive solder and flow solder into joint. Fill joint completely. Completely remove flux and spatter from exposed surfaces.
- F. Sealed Joints: Form nonexpansion, but movable, joints in metal to accommodate elastomeric sealant to comply with SMACNA standards. Fill joint with sealant and form metal to completely conceal sealant.
1. Use joint adhesive for nonmoving joints specified not to be soldered.
- G. Seams: Fabricate nonmoving seams in sheet metal with flat-lock seams. Tin edges to be seamed, form seams, and solder.
- H. Separations: Separate metal from noncompatible metal or corrosive substrates by coating concealed surfaces, at locations of contact, with asphalt mastic or other permanent separation as recommended by manufacturer.
1. Bed flanges of Work in a thick coat of roofing cement where required for waterproof performance.
- I. Counterflashings: Coordinate installation of counterflashings with installation of assemblies to be protected by counterflashing. Install counterflashings in reglets or receivers. Secure in a waterproof manner by means of snap-in installation and sealant, lead wedges and sealant, interlocking folded seam, or blind rivets and sealant. Lap counterflashing joints a minimum of 2 inches and bed with sealant.
- J. Roof-Drainage System: Install drainage items fabricated from sheet metal, with straps, adhesives, and anchors recommended by SMACNA's Manual or the item manufacturer, to drain roof in the most efficient manner. Coordinate roof-drain flashing installation with roof-drainage system installation. Coordinate flashing and sheet metal items for steep-sloped roofs with roofing installation.
- K. Roof-Penetration Flashing: Coordinate roof-penetration flashing installation with roofing and installation of items penetrating roof. Install flashing as follows:
1. Turn lead flashing down inside vent piping, being careful not to block vent piping with flashing.
  2. Seal and clamp flashing to pipes penetrating roof, other than lead flashing on vent piping.

### 3.4 CLEANING AND PROTECTION

- A. Clean exposed metal surfaces, removing substances that might cause corrosion of metal or deterioration of finishes.
- B. Provide final protection and maintain conditions that ensure sheet metal flashing and trim Work during construction is without damage or deterioration other than natural weathering at the time of Substantial Completion.

**END OF SECTION 07620**

## **SECTION 07720 - ROOF ACCESSORIES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Safety rail system.
  - 2. Telescoping ladder safety post.
- B. Related Sections include the following:
  - 1. Division 5 Section "Metal Fabrications" for metal vertical ladders.
  - 2. Division 6 Section "Rough Carpentry" for wood nailers.
  - 3. Division 7 Section "Sheet Metal Flashing and Trim" for shop- and field-fabricated metal flashing and counterflashing, roof expansion-joint covers, and miscellaneous sheet metal trim and accessories.

#### **1.3 SUBMITTALS**

- A. Product Data: For each type of roof accessory indicated. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

#### **1.4 QUALITY ASSURANCE**

- A. Sheet Metal Standard: Comply with SMACNA's "Architectural Sheet Metal Manual" details for fabrication of units, including flanges and cap flashing to coordinate with type of roofing indicated.

#### **1.5 DELIVERY, STORAGE, AND HANDLING**

- A. Pack, handle, and ship roof accessories properly labeled in heavy-duty packaging to prevent damage.

#### **1.6 PROJECT CONDITIONS**

- A. Field Measurements: Verify required openings for each type of roof accessory by field measurements before fabrication and indicate measurements on Shop Drawings.

#### **1.7 COORDINATION**

- A. Coordinate layout and installation of roof accessories with roofing membrane and base flashing and interfacing and adjoining construction to provide a leakproof, weathertight, secure, and noncorrosive installation.
  - 1. With Architect's approval, adjust location of roof accessories that would interrupt roof drainage routes.

## PART 2 - PRODUCTS

### 2.1 MANUFACTURERS

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, manufacturers listed in other Part 2 articles.

### 2.2 METAL MATERIALS

- A. Galvanized Steel Sheet: ASTM A 653/A 653M, G90 coated.
- B. Stainless-Steel Shapes or Sheet: ASTM A 240/A 240M or ASTM A 666, Type 304 or Type 316, No. 2D finish.
- C. Steel Shapes: ASTM A 36/A 36M, hot-dip galvanized to comply with ASTM A 123/A 123M, unless otherwise indicated.
- D. Steel Tube: ASTM A 500, round tube, baked-enamel finished.
- E. Galvanized Steel Tube: ASTM A 500, round tube, hot-dip galvanized to comply with ASTM A 123/A 123M.
- F. Galvanized Steel Pipe: ASTM A 53/A 53M.

### 2.3 MISCELLANEOUS MATERIALS

- A. Cellulosic-Fiber Board Insulation: ASTM C 208, Type II, Grade 1, 1 inch thick.
- B. Glass-Fiber Board Insulation: ASTM C 726, 1 inch thick.
- C. Polyisocyanurate Board Insulation: ASTM C 1289, 1 inch thick.
- D. Bituminous Coating: Cold-applied asphalt mastic, SSPC-Paint 12, compounded for 15-mil dry film thickness per coat. Provide inert-type noncorrosive compound free of asbestos fibers, sulfur components, and other deleterious impurities.
- E. Polyethylene Sheet: 6-mil- thick, polyethylene sheet complying with ASTM D 4397.
- F. Felt: ASTM D 226, Type II (No. 30), asphalt-saturated organic felt, nonperforated.
  - 1. Slip Sheet: Rosin-sized paper, minimum 3 lb/100 sq. ft..

- G. Fasteners: Same metal as metals being fastened, or nonmagnetic stainless steel or other noncorrosive metal as recommended by roof accessory manufacturer. Match finish of exposed fasteners with finish of material being fastened. Provide nonremovable fastener heads to exterior exposed fasteners.
- H. Gaskets: Manufacturer's standard tubular or fingered design of neoprene, EPDM, or PVC; or flat design of foam rubber, sponge neoprene, or cork.
- I. Elastomeric Sealant: ASTM C 920, polyurethane sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.
- J. Butyl Sealant: ASTM C 1311, single-component, solvent-release butyl rubber sealant, polyisobutylene plasticized, and heavy bodied for hooked-type expansion joints with limited movement.
- K. Roofing Cement: ASTM D 4586, nonasbestos, fibrated asphalt cement designed for trowel application or other adhesive compatible with roofing system.

## 2.4 ROOF HATCH SAFETY RAIL

- A. Safety Railing System: Complete system including rails, clamps, fasteners, safety barrier at railing opening, and all accessories required for a complete installation.
  - 1. Consult authorities having jurisdiction for minimum test load criteria.
  - 2. Test Load: Per A.H.J.
  - 3. 42 inches (1060 mm) is typical standard height. Consult authorities having jurisdiction.
  - 4. Height: 42 inches above finished roof deck.
  - 5. Two subparagraphs below are typical pipe and toe guard flat bar dimensions. Other diameters and thicknesses may be specified.
  - 6. Pipe or Tube: 1-1/4-inch ID galvanized pipe or 1-5/8-inch OD galvanized tube. (*Fiberglass system will not be allowed*)
  - 7. Flat Bar: 2-inch- high by 3/8-inch- thick galvanized steel.
  - 8. Select one of first two subparagraphs below.
  - 9. Chain Passway Enclosure: Galvanized proof coil chain with quick link on fixed end.
  - 10. Self-Latching Gate: Fabricated of same materials and rail spacing as safety railing system. Provide manufacturer's standard hinges and self-latching mechanism.
  - 11. Pipe Ends and Tops: Covered or plugged with weather-resistant material.
  - 12. Provide weep holes or another means to drain entrapped water in hollow sections of handrail and railing members that are exposed to exterior or to moisture from condensation or other sources.
  - 13. Fabricate joints that will be exposed to weather in a watertight manner.
  - 14. Close exposed ends of handrail and railing members with prefabricated end fittings.
  - 15. Fasteners: Manufacturer's standard.
  - 16. Finish: Paint

## 2.5 LADDER SAFETY POST

- A. Furnish and install where indicated on plans ladder safety post. The ladder safety post shall be pre-assembled from the manufacturer,
- B. Performance characteristics:
  - 1. Tubular post shall lock automatically when fully extended.
  - 2. Safety post shall have controlled upward and downward movement.
  - 3. Release lever shall disengage the post to allow it to be returned to its lowered position.

- 4. Post shall have adjustable mounting brackets to fit ladder rung spacing up to 14" on center and clamp brackets to accommodate ladder rungs up to 1-3/4" in diameter.
- C. Post: Shall be manufactured of high strength square tubing. A pull up loop shall be provided at the upper end of the post to facilitate raising the post.
- D. Material of construction: Shall be steel.
- E. Balancing spring: A stainless steel spring balancing mechanism shall be provided to provide smooth, easy, controlled operation when raising and lowering the safety post.
- F. Hardware: All mounting hardware shall be Type 316 stainless steel.
- G. Finishes: Factory finish shall be black enamel steel.

### PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, to verify actual locations, dimensions, and other conditions affecting performance of work.
  - 1. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored and is ready to receive roof accessories.
  - 2. Verify dimensions of roof openings for roof accessories.
  - 3. Proceed with installation only after unsatisfactory conditions have been corrected.

#### 3.2 INSTALLATION

- A. General: Install roof accessories according to manufacturer's written instructions. Anchor roof accessories securely in place and capable of resisting forces specified. Use fasteners, separators, sealants, and other miscellaneous items as required for completing roof accessory installation. Install roof accessories to resist exposure to weather without failing, rattling, leaking, and fastener disengagement.
- B. Install roof accessories to fit substrates and to result in watertight performance.
- C. Metal Protection: Where dissimilar metals will contact each other or corrosive substrates, protect against galvanic action by painting contact surfaces with bituminous coating or by other permanent separation as recommended by manufacturer.
  - 1. Underlayment: Where installing exposed-to-view components of roof accessories directly on cementitious or wood substrates, install a course of felt underlayment and cover with a slip sheet, or install a course of polyethylene underlayment.
  - 2. Bed flanges in thick coat of asphalt roofing cement where required by roof accessory manufacturers for waterproof performance.
- D. Install roof accessories level, plumb, true to line and elevation, and without warping, jogs in alignment, excessive oil canning, buckling, or tool marks.
- E. Seal joints with elastomeric sealant as required by manufacturer of roof accessories.

3.3 TOUCH UP

- A. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A 780.

3.4 CLEANING

- A. Clean exposed surfaces according to manufacturer's written instructions.

**END OF SECTION 07720**

## **SECTION 07920 - JOINT SEALANTS**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes sealants for the following applications, including those specified by reference to this Section:
  - 1. Exterior metal to metal joints
  - 2. Exterior metal to Masonry or concrete.
  - 3. All other exterior joints exposed to the elements.

#### **1.3 PERFORMANCE REQUIREMENTS**

- A. Provide elastomeric joint sealants that establish and maintain watertight and airtight continuous joint seals without staining or deteriorating joint substrates.
- B. Provide joint sealants for interior applications that establish and maintain airtight and water-resistant continuous joint seals without staining or deteriorating joint substrates.

#### **1.4 SUBMITTALS**

- A. Product Data: For each joint-sealant product indicated.
- B. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.
- C. Samples for Verification: For each type and color of joint sealant required. Install joint sealants in 1/2-inch- wide joints formed between two 6-inch- long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.
- D. Qualification Data: For firms and persons specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include lists of completed projects with project names and addresses, names and addresses of architects and owners, and other information specified.

#### **1.5 QUALITY ASSURANCE**

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.



## 1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in original unopened containers or bundles with labels indicating manufacturer, product name and designation, color, expiration date, pot life, curing time, and mixing instructions for multi-component materials.
- B. Store and handle materials in compliance with manufacturer's written instructions to prevent their deterioration or damage due to moisture, high or low temperatures, contaminants, or other causes.

## 1.7 PROJECT CONDITIONS

- A. Environmental Limitations: Do not proceed with installation of joint sealants under the following conditions:
  - 1. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer.
  - 2. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 40 deg F.
  - 3. When joint substrates are wet.
- B. Joint-Width Conditions: Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.
- C. Joint-Substrate Conditions: Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

## 1.8 WARRANTY

- A. General Warranty: Special warranties specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of the Contract Documents.
- B. Special Installer's Warranty: Written warranty, signed by Installer agreeing to repair or replace elastomeric joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
  - 1. Warranty Period: Five years from date of Substantial Completion.
- C. Special Manufacturer's Warranty: Written warranty, signed by elastomeric sealant manufacturer agreeing to furnish elastomeric joint sealants to repair or replace those that do not comply with performance and other requirements specified in this Section within specified warranty period.
  - 1. Warranty Period shall be as indicated in paragraph 2.3B but not less than 50 years from date of Substantial Completion.
- D. Special warranties specified in this Article exclude deterioration or failure of elastomeric joint sealants from the following:
  - 1. Movement of the structure resulting in stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression caused by structural settlement or errors attributable to design or construction.
  - 2. Disintegration of joint substrates from natural causes exceeding design specifications.
  - 3. Mechanical damage caused by individuals, tools, or other outside agents.
  - 4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

## PART 2 - PRODUCTS

### 2.1 PRODUCTS AND MANUFACTURERS

- A. Available Products: Subject to compliance with requirements, products that may be incorporated into the Work include, but are not limited to, the products specified in the sealant schedules at the end of Part 3.

### 2.2 MATERIALS, GENERAL

- A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
- B. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range for this characteristic.

### 2.3 ELASTOMERIC JOINT SEALANTS

- A. Elastomeric Sealant Standard: Comply with ASTM C 920 and other requirements indicated for each liquid-applied chemically curing sealant in the Elastomeric Joint-Sealant Schedule at the end of Part 3, including those referencing ASTM C 920 classifications for type, grade, class, and uses.
- B. Approved Manufacturers and Products:
- C.
  - 1. **New sealant** at new and existing exterior and interior weather resistant joints shall be DAP "ADVANCED LATEX CAULK FORMULA 230" having a 50 year warranty except where the Roofing Manufacturer's sealant must be used to obtain the specified roof system warranty.
- D.
  - a. Use at existing joints replace only sealant beads that are gapped, dished to hold water, disturbed by construction or otherwise defective.
  - 2. **Other Sealant** may be used with written Architect approval in the following order of preference:
    - a. DAP "ACRYLIC LATEX PLUS SILICONE" having a 35 year warranty.
    - b. SONNEBORNE SONOLASTIC NP1 having a 20 year warranty.
    - c. KOSH PROTECTIVE TREATMENT INC. "Pti 7130" having a 20 year warranty.

### 2.4 JOINT-SEALANT BACKING

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C 1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
  - 1. Type C: Closed-cell material with a surface skin.
  - 2. Type O: Open-cell material.
  - 3. Type B: Bicellular material with a surface skin.
  - 4. Type: Any material indicated above.

## 2.5 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants with joint substrates.
- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting joint-sealant performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

### 3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint sealant manufacturer's written instructions and the following requirements:
  - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
  - 2. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
    - a. Concrete.
    - b. Masonry.
    - c. Unglazed surfaces of ceramic tile.
  - 3. Remove laitance and form-release agents from concrete.
  - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
    - a. Metal.
    - b. Glass.
    - c. Porcelain enamel.
    - d. Glazed surfaces of ceramic tile.
- B. Joint Priming: Prime joint substrates where recommended in writing by joint sealant manufacturer, based on preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint

sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

- C. Masking Tape: Use masking tape where required to prevent contact of sealant with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

### 3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. Sealant Installation Standard: Comply with recommendations of ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install sealant backings of type indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
  - 1. Do not leave gaps between ends of sealant backings.
  - 2. Do not stretch, twist, puncture, or tear sealant backings.
  - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- D. Install sealants by proven techniques to comply with the following and at the same time backings are installed:
  - 1. Place sealants so they directly contact and fully wet joint substrates.
  - 2. Completely fill recesses provided for each joint configuration.
  - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- E. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
  - 1. Remove excess sealants from surfaces adjacent to joint.
  - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
  - 3. Provide concave joint configuration per Figure 5A in ASTM C 1193, unless otherwise indicated.

### 3.4 CLEANING

- A. Clean off excess sealants or sealant smears as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

### 3.5 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from the original work.

### 3.6 ELASTOMERIC JOINT-SEALANT SCHEDULE

- A. Single-Component Nonsag Polysulfide Sealant: Where joint sealants of this type are indicated, provide the following: products listed in order of preference:

1. **Approve Manufacturers and Products:**

- a. **DYNAFLEX 230 PREMIUM ELASTOMERIC LATEX SEALANT BY DAP (50 YEAR WARRANTY)**

2. **Other Sealant** may be used with written Architect approval in the flowing order of preference:

- a. DAP “ACRYLIC LATEX PLUS SILICONE” having a 35 year warranty.  
b. SONNEBORNE SONOLASTIC NP1 having a 20 year warranty.  
c. KOSH PROTECTIVE TREATMENT INC. “Pti 7130” having a 50 year warranty.

- B. Type and Grade: S (single component) and NS (nonsag).

- C. Class: 25.

- D. Use Related to Exposure: NT (non-traffic).

- E. Uses Related to Joint Substrates: M, G, A, and, as applicable to joint substrates indicated O.

1. Below are examples of Use O substrates. Retain only those that apply or insert others.

- a. Use O Joint Substrates: Coated glass, color anodic aluminum, aluminum coated with a high-performance coating, galvanized steel, brick, granite, limestone, marble, ceramic tile, and wood.

1) Applications:

- a) Wall joints (exterior)  
b) Flashing and coping joints  
c) Interior wall and ceiling joints

**END OF SECTION 07920**

## **SECTION 08311 - ACCESS DOORS AND FRAMES**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawing and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes the following:
  - 1. Ceiling access doors and frames.
- B. Related Sections include the following:
  - 1. Division 7 Section "Roof Accessories" for roof hatches.

#### **1.3 SUBMITTALS**

- A. Product Data: For each type of door and frame indicated. Include construction details relative to materials, individual components and profiles, finishes, and fire ratings (if required) for access doors and frames.

#### **1.4 QUALITY ASSURANCE**

- A. Source Limitations: Obtain doors and frames through one source from a single manufacturer.
- B. Size Variations: Obtain Architect's acceptance of manufacturer's standard-size units, which may vary slightly from sizes indicated.

### **PART 2 - PRODUCTS**

#### **2.1 MANUFACTURERS**

- A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
  - 1. Access Doors:
    - a. Cendrex, Inc.
    - b. J. L. Industries, Inc.
    - c. Karp Associates, Inc.
    - d. Larsen's Manufacturing Company.
    - e. Milcor Limited Partnership.

- f. Williams Bros. Corporation of America (The).

## 2.2 MATERIALS

- A. Hot-Rolled Steel Sheets: ASTM A 569/A 569M, Commercial Steel (CS), Type B; free of scale, pitting, and surface defects; pickled and oiled; with minimum thickness indicated representing specified nominal thickness according to ASTM A 568/A 568M.
- B. Cold-Rolled Steel Sheets: ASTM A 366/A 366M, Commercial Steel (CS), or ASTM A 620/A 620M, Drawing Steel (DS), Type B; stretcher-leveled standard of flatness; with minimum thickness indicated representing specified nominal thickness according to ASTM A 568/A 568M. Electrolytic zinc-coated steel sheet, complying with ASTM A 591/A 591M, Class C coating, may be substituted at fabricator's option.

## 2.3 PAINT

- A. Shop Primer for Ferrous Metal: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with performance requirements in FS TT-P-664; selected for good resistance to normal atmospheric corrosion, compatibility with finish paint systems indicated, and capability to provide a sound foundation for field-applied topcoats despite prolonged exposure.

## 2.4 ACCESS DOORS AND FRAMES

- A. Flush Access Doors and Frames with Exposed Trim: Fabricated from steel sheet.
1. Locations: ceiling surfaces.
  2. Door: Minimum 0.060-inch- thick sheet metal, set flush with exposed face flange of frame.
  3. Frame: Minimum 0.060-inch- thick sheet metal with 1-1/4-inch- wide, surface-mounted trim.
  4. Hinges: Continuous piano hinge.
  5. Latch: Screwdriver-operated cam latch.

## 2.5 FABRICATION

- A. General: Provide access door assemblies manufactured as integral units ready for installation.
- B. Metal Surfaces: For metal surfaces exposed to view in the completed Work, provide materials with smooth, flat surfaces without blemishes. Do not use materials with exposed pitting, seam marks, roller marks, rolled trade names, or roughness.
- C. Steel Doors and Frames: Grind exposed welds smooth and flush with adjacent surfaces. Furnish attachment devices and fasteners of type required to secure access panels to types of supports indicated.
1. Exposed Flanges: As indicated.
  2. Provide mounting holes in frames to attach frames to metal or wood framing in plaster and drywall construction and to attach masonry anchors in masonry construction. Furnish adjustable metal masonry anchors.
- D. Latching Mechanisms: Furnish number required to hold doors in flush, smooth plane when closed.

## 2.6 FINISHES, GENERAL

- A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.
- B. Finish metal fabrications after assembly.

## 2.7 STEEL FINISHES

- A. Surface Preparation: Prepare uncoated ferrous-metal surfaces to comply with minimum requirements indicated below for SSPC surface-preparation specifications and environmental exposure conditions of installed metal fabrications:
  - 1. Exteriors (SSPC Zone 1B): SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
  - 2. Interiors (SSPC Zone 1A): SSPC-SP 3, "Power Tool Cleaning."
- B. Apply shop primer to uncoated surfaces of metal fabrications. Comply with SSPC-PA 1, "Paint Application Specification No. 1," for shop painting.

## PART 3 - EXECUTION

### 3.1 PREPARATION

- A. Advise installers of other work about specific requirements relating to access door and floor door installation, including sizes of openings to receive access door and frame, as well as locations of supports, inserts, and anchoring devices.

### 3.2 INSTALLATION

- A. Comply with manufacturer's written instructions for installing access doors and frames.
- B. Set frames accurately in position and attach securely to supports with plane of face panels aligned with adjacent finish surfaces.

### 3.3 ADJUSTING AND CLEANING

- A. Adjust doors and hardware after installation for proper operation.
- B. Remove and replace doors and frames that are warped, bowed, or otherwise damaged.

**END OF SECTION 08311**



## **SECTION 09912 - PAINTING (PROFESSIONAL LINE PRODUCTS)**

### **PART 1 - GENERAL**

#### **1.1 RELATED DOCUMENTS**

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

#### **1.2 SUMMARY**

- A. This Section includes surface preparation and field painting of exposed exterior and interior items and surfaces.
  - 1. Surface preparation, priming, and finish coats specified in this Section are in addition to shop priming and surface treatment specified in other Sections.
- B. Paint exposed surfaces, except where these Specifications indicate that the surface or material is not to be painted or is to remain natural. If an item or a surface is not specifically mentioned, paint the item or surface the same as similar adjacent materials or surfaces. If a color of finish is not indicated, Architect will select from standard colors and finishes available.
  - 1. Painting includes field painting of exposed bare and covered pipes and ducts (including color coding), hangers, exposed steel and iron supports, and surfaces of mechanical and electrical equipment that do not have a factory-applied final finish.
- C. Do not paint prefinished items, concealed surfaces, finished metal surfaces, operating parts, and labels.
  - 1. Prefinished items including, but not limited to, the following factory-finished components:
    - a. Architectural woodwork.
    - b. Finished mechanical and electrical equipment.
    - c. Light fixtures.
  - 2. Concealed surfaces include walls or ceilings in the following generally inaccessible spaces:
    - a. Foundation spaces.
    - b. Furred areas.
    - c. Ceiling plenums.
    - d. Pipe spaces.
    - e. Duct shafts.
    - f. Dumbwaiter shafts.
  - 3. Finished metal surfaces include the following:
    - a. Anodized aluminum.
    - b. Stainless steel.
    - c. Chromium plate.
    - d. Copper and copper alloys.
    - e. Bronze and brass.

4. Operating parts include moving parts of operating equipment and the following:
  - a. Valve and damper operators.
  - b. Linkages.
  - c. Sensing devices.
  - d. Motor and fan shafts.
5. Labels: Do not paint over UL, FMG, or other code-required labels or equipment name, identification, performance rating, or nomenclature plates.

D. Related Sections include the following:

1. Division 2 Section "Hot-Mix Asphalt Paving" for traffic-marking paint.
2. Division 5 Section "Structural Steel" for shop priming structural steel.
3. Division 5 Section "Metal Fabrications" for shop priming ferrous metal.
4. Division 8 Section "Steel Doors and Frames" for factory priming steel doors and frames.
5. Division 9 Section "Gypsum Board Assemblies" for surface preparation of gypsum board.

E. Alternates: Refer to Division 1 Section "Alternates" for description of Work in this Section affected by alternates.

### 1.3 DEFINITIONS

A. General: Standard coating terms defined in ASTM D 16 apply to this Section.

1. Eggshell refers to low-sheen finish with a gloss range between 20 and 35 when measured at a 60-degree meter.
2. Semigloss refers to medium-sheen finish with a gloss range between 35 and 70 when measured at a 60-degree meter.
3. Full gloss refers to high-sheen finish with a gloss range more than 70 when measured at a 60-degree meter.

### 1.4 SUBMITTALS

A. Product Data: For each paint system indicated. Include block fillers and primers.

1. Material List: An inclusive list of required coating materials. Indicate each material and cross-reference specific coating, finish system, and application. Identify each material by manufacturer's catalog number and general classification.
2. Manufacturer's Information: Manufacturer's technical information, including label analysis and instructions for handling, storing, and applying each coating material.

B. Samples for Initial Selection: For each type of finish-coat material indicated.

1. After color selection, Architect will furnish color chips for surfaces to be coated.

### 1.5 QUALITY ASSURANCE

A. Applicator Qualifications: A firm or individual experienced in applying paints and coatings similar in material, design, and extent to those indicated for this Project, whose work has resulted in applications with a record of successful in-service performance.

- B. Source Limitations: Obtain primers (where occurs) for each coating system from the same manufacturer as the finish coats.

## 1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in manufacturer's original, unopened packages and containers bearing manufacturer's name and label and the following information:
  - 1. Product name or title of material.
  - 2. Product description (generic classification or binder type).
  - 3. Manufacturer's stock number and date of manufacture.
  - 4. Contents by volume, for pigment and vehicle constituents.
  - 5. Thinning instructions.
  - 6. Application instructions.
  - 7. Color name and number.
  - 8. VOC content.
- B. Store materials not in use in tightly covered containers in a well-ventilated area at a minimum ambient temperature of 45 deg F. Maintain storage containers in a clean condition, free of foreign materials and residue.
  - 1. Protect from freezing. Keep storage area neat and orderly. Remove oily rags and waste daily.

## 1.7 PROJECT CONDITIONS

- A. Apply waterborne paints only when temperatures of surfaces to be painted and surrounding air are between 50 and 90 deg F.
- B. Apply solvent-thinned paints only when temperatures of surfaces to be painted and surrounding air are between 45 and 95 deg F.
- C. Do not apply paint in snow, rain, fog, or mist; or when relative humidity exceeds 85 percent; or at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.
  - 1. Painting may continue during inclement weather if surfaces and areas to be painted are enclosed and heated within temperature limits specified by manufacturer during application and drying periods.

## PART 2 - PRODUCTS

### 2.1 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide one of the products listed in other Part 2 articles.
- B. Manufacturers' Names: Shortened versions (shown in parentheses) of the following manufacturers' names are used in other Part 2 articles:
  - 1. Benjamin Moore & Co. (Benjamin Moore).
  - 2. Kelly-Moore Paint Co. (Kelly-Moore).
  - 3. PPG Industries, Inc. (Pittsburgh Paints).

4. Sherwin-Williams Co. (Sherwin-Williams).

## 2.2 PAINT MATERIALS, GENERAL

- A. Material Compatibility: Provide block fillers, primers, and finish-coat materials that are compatible with one another and with the substrates indicated under conditions of service and application, as demonstrated by manufacturer based on testing and field experience.
- B. Material Quality: Provide manufacturer's best-quality paint material of the various coating types specified that are factory formulated and recommended by manufacturer for application indicated. Paint-material containers not displaying manufacturer's product identification will not be acceptable.
  1. Proprietary Names: Use of manufacturer's proprietary product names to designate colors or materials is not intended to imply that products named are required to be used to the exclusion of equivalent products of other manufacturers. Furnish manufacturer's material data and certificates of performance for proposed substitutions.
- C. Colors: As selected by Architect from manufacturer's full range.

## 2.3 EXTERIOR PRIMERS

- A. Exterior Ferrous-Metal Primer: Factory-formulated rust-inhibitive metal primer for exterior application.
  1. Benjamin Moore; Moore's IMC Alkyd Metal Primer No. M06: Applied at a dry film thickness of not less than 2.0 mils.
  2. Kelly-Moore; 1711 Kel-Guard Alkyd White Rust Inhibitive Primer: Applied at a dry film thickness of not less than 2.0 mils.
  3. Pittsburgh Paints; 90-712 Pitt-Tech One Pack Interior/Exterior Primer Finish DTM Industrial Enamel: Applied at a dry film thickness of not less than 3.0 mils.
  4. Sherwin-Williams; Kem Kromik Universal Metal Primer B50NZ6/B50WZ1: Applied at a dry film thickness of not less than 3.0 mils.

## 2.4 INTERIOR PRIMERS

- A. Interior Gypsum Board Primer: Factory-formulated latex-based primer for interior application.
  1. Benjamin Moore; Moorcraft Super Spec Latex Enamel Undercoater & Primer Sealer No. 253: Applied at a dry film thickness of not less than 1.2 mils.
  2. Kelly-Moore; 971 Acry-Prime Interior Latex Primer/Sealer: Applied at a dry film thickness of not less than 1.6 mils.
  3. Pittsburgh Paints; 6-2 SpeedHide Interior Quick-Drying Latex Sealer: Applied at a dry film thickness of not less than 1.0 mil.
  4. Sherwin-Williams; PrepRite 200 Latex Wall Primer B28W200 Series: Applied at a dry film thickness of not less than 1.6 mils.
- B. Interior Ferrous-Metal Primer: Factory-formulated quick-drying rust-inhibitive alkyd-based metal primer.
  1. Benjamin Moore; Moore's IMC Alkyd Metal Primer No. M06: Applied at a dry film thickness of not less than 2.0 mils.
  2. Kelly-Moore; 1711 Kel-Guard Alkyd White Rust Inhibitive Primer: Applied at a dry film thickness of not less than 2.0 mils.

3. Pittsburgh Paints; 90-709 Pitt-Tech One Pack Interior/Exterior Primer/Finish DTM Industrial Enamel: Applied at a dry film thickness of not less than 1.5 mils.
4. Sherwin-Williams; Kem Kromik Universal Metal Primer B50NZ6/B50WZ1: Applied at a dry film thickness of not less than 3.0 mils.

## 2.5 EXTERIOR FINISH COATS

- A. Exterior Full-Gloss Alkyd Enamel: Factory-formulated full-gloss alkyd enamel for exterior application.
  1. Benjamin Moore; Moore's IMC Urethane Alkyd Enamel M22: Applied at a dry film thickness of not less than 2.0 mils.
  2. Kelly-Moore; 1700 Kel-Guard Gloss Alkyd Rust Inhibitive Enamel: Applied at a dry film thickness of not less than 2.0 mils.
  3. Pittsburgh Paints; 7-814 Pittsburgh Paints Industrial Gloss-Oil Interior/Exterior Enamel: Applied at a dry film thickness of not less than 1.5 mils.
  4. Sherwin-Williams; Industrial Enamel B-54 Series: Applied at a dry film thickness of not less than 2.0 mils.

## 2.6 INTERIOR FINISH COATS

- A. Interior Low-Luster Acrylic Enamel: Factory-formulated eggshell acrylic-latex interior enamel.
  1. Benjamin Moore; Moorcraft Super Spec Latex Eggshell Enamel No. 274: Applied at a dry film thickness of not less than 1.3 mils.
  2. Kelly-Moore; 1610 Sat-N-Sheen Interior Latex Low Sheen Wall and Trim Finish: Applied at a dry film thickness of not less than 1.6 mils.
  3. Kelly-Moore; 1686 Dura-Poxy Eggshell Acrylic Enamel: Applied at a dry film thickness of not less than 1.6 mils.
  4. Pittsburgh Paints; 6-400 Series SpeedHide Eggshell Acrylic Latex Enamel: Applied at a dry film thickness of not less than 1.25 mils.
  5. Sherwin-Williams; ProMar 200 Interior Latex Egg-Shell Enamel B20W200 Series: Applied at a dry film thickness of not less than 1.6 mils.
- B. Interior Semigloss Alkyd Enamel: Factory-formulated semigloss alkyd enamel for interior application.
  1. Benjamin Moore; Moorcraft Super Spec Alkyd Semi-Gloss Enamel No. 271: Applied at a dry film thickness of not less than 1.4 mils.
  2. Kelly-Moore; 1630--Kel-Cote Interior Alkyd Semi-Gloss Enamel: Applied at a dry film thickness of not less than 2.2 mils.
  3. Pittsburgh Paints; 6-1110 Series SpeedHide Interior Enamel Wall & Trim Semi-Gloss Oil: Applied at a dry film thickness of not less than 1.4 mils.
  4. Sherwin-Williams; ProMar 200 Interior Alkyd Semi-Gloss Enamel B34W200 Series: Applied at a dry film thickness of not less than 1.7 mils.

## 2.7 INTERIOR WOOD STAINS AND VARNISHES

- A. Open-Grain Wood Filler: Factory-formulated paste wood filler applied at spreading rate recommended by manufacturer.
  1. Benjamin Moore; Benwood Paste Wood Filler No. 238.
  2. Kelly-Moore; none required.
  3. Pittsburgh Paints; none required.

4. Sherwin-Williams; Sher-Wood Fast-Dry Filler.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Applicator present, for compliance with requirements for paint application. Comply with procedures specified in PDCA P4.
  1. Proceed with paint application only after unsatisfactory conditions have been corrected and surfaces receiving paint are thoroughly dry.
  2. Start of painting will be construed as Applicator's acceptance of surfaces and conditions within a particular area.
- B. Coordination of Work: Review other Sections in which primers are provided to ensure compatibility of the total system for various substrates. On request, furnish information on characteristics of finish materials to ensure use of compatible primers.
  1. Notify Architect about anticipated problems when using the materials specified over substrates primed by others.

### 3.2 PREPARATION

- A. General: Remove hardware and hardware accessories, plates, machined surfaces, lighting fixtures, and similar items already installed that are not to be painted. If removal is impractical or impossible because of size or weight of the item, provide surface-applied protection before surface preparation and painting.
  1. After completing painting operations in each space or area, reinstall items removed using workers skilled in the trades involved.
- B. Cleaning: Before applying paint or other surface treatments, clean substrates of substances that could impair bond of the various coatings. Remove oil and grease before cleaning.
  1. Schedule cleaning and painting so dust and other contaminants from the cleaning process will not fall on wet, newly painted surfaces.
- C. Surface Preparation: Clean and prepare surfaces to be painted according to manufacturer's written instructions for each particular substrate condition and as specified.
  1. Provide barrier coats over incompatible primers or remove and reprime.
  2. Wood: Clean surfaces of dirt, oil, and other foreign substances with scrapers, mineral spirits, and sandpaper, as required. Sand surfaces exposed to view smooth and dust off.
    - a. Scrape and clean small, dry, seasoned knots, and apply a thin coat of white shellac or other recommended knot sealer before applying primer. After priming, fill holes and imperfections in finish surfaces with putty or plastic wood filler. Sand smooth when dried.
    - b. Prime, stain, or seal wood to be painted immediately on delivery. Prime edges, ends, faces, undersides, and back sides of wood, including cabinets, counters, cases, and paneling.
    - c. If transparent finish is required, backprime with spar varnish.
    - d. Backprime paneling on interior partitions where masonry, plaster, or other wet wall construction occurs on back side.

- e. Seal tops, bottoms, and cutouts of unprimed wood doors with a heavy coat of varnish or sealer immediately on delivery.
- 3. Ferrous Metals: Clean ungalvanized ferrous-metal surfaces that have not been shop coated; remove oil, grease, dirt, loose mill scale, and other foreign substances. Use solvent or mechanical cleaning methods that comply with SSPC's recommendations.
  - a. Blast steel surfaces clean as recommended by paint system manufacturer and according to SSPC-SP 6/NACE No. 3.
  - b. Treat bare and sandblasted or pickled clean metal with a metal treatment wash coat before priming.
  - c. Touch up bare areas and shop-applied prime coats that have been damaged. Wire-brush, clean with solvents recommended by paint manufacturer, and touch up with same primer as the shop coat.
- D. Material Preparation: Mix and prepare paint materials according to manufacturer's written instructions.
  - 1. Maintain containers used in mixing and applying paint in a clean condition, free of foreign materials and residue.
  - 2. Stir material before application to produce a mixture of uniform density. Stir as required during application. Do not stir surface film into material. If necessary, remove surface film and strain material before using.
  - 3. Use only thinners approved by paint manufacturer and only within recommended limits.
- E. Tinting: Tint each undercoat a lighter shade to simplify identification of each coat when multiple coats of same material are applied. Tint undercoats to match the color of the finish coat, but provide sufficient differences in shade of undercoats to distinguish each separate coat.

### 3.3 APPLICATION

- A. General: Apply paint according to manufacturer's written instructions. Use applicators and techniques best suited for substrate and type of material being applied.
  - 1. Paint colors, surface treatments, and finishes are indicated in the paint schedules.
  - 2. Do not paint over dirt, rust, scale, grease, moisture, scuffed surfaces, or conditions detrimental to formation of a durable paint film.
  - 3. Provide finish coats that are compatible with primers used.
  - 4. The term "exposed surfaces" includes areas visible when permanent or built-in fixtures, grilles, convector covers, covers for finned-tube radiation, and similar components are in place. Extend coatings in these areas, as required, to maintain system integrity and provide desired protection.
  - 5. Paint surfaces behind movable equipment and furniture the same as similar exposed surfaces. Before final installation of equipment, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
  - 6. Paint interior surfaces of ducts with a flat, nonspecular black paint where visible through registers or grilles.
  - 7. Paint back sides of access panels and removable or hinged covers to match exposed surfaces.
  - 8. Finish exterior doors on tops, bottoms, and side edges the same as exterior faces.
  - 9. Finish interior of wall and base cabinets and similar field-finished casework to match exterior.
  - 10. Sand lightly between each succeeding enamel or varnish coat.
- B. Scheduling Painting: Apply first coat to surfaces that have been cleaned, pretreated, or otherwise prepared for painting as soon as practicable after preparation and before subsequent surface deterioration.

1. The number of coats and film thickness required are the same regardless of application method. Do not apply succeeding coats until previous coat has cured as recommended by manufacturer. If sanding is required to produce a smooth, even surface according to manufacturer's written instructions, sand between applications.
  2. Omit primer over metal surfaces that have been shop primed and touchup painted.
  3. If undercoats, stains, or other conditions show through final coat of paint, apply additional coats until paint film is of uniform finish, color, and appearance. Give special attention to ensure that edges, corners, crevices, welds, and exposed fasteners receive a dry film thickness equivalent to that of flat surfaces.
  4. Allow sufficient time between successive coats to permit proper drying. Do not recoat surfaces until paint has dried to where it feels firm, and does not deform or feel sticky under moderate thumb pressure, and until application of another coat of paint does not cause undercoat to lift or lose adhesion.
- C. Application Procedures: Apply paints and coatings by brush, roller, spray, or other applicators according to manufacturer's written instructions.
1. Brushes: Use brushes best suited for type of material applied. Use brush of appropriate size for surface or item being painted.
  2. Rollers: Use rollers of carpet, velvet-back, or high-pile sheep's wool as recommended by manufacturer for material and texture required.
  3. Spray Equipment: Use airless spray equipment with orifice size as recommended by manufacturer for material and texture required.
- D. Minimum Coating Thickness: Apply paint materials no thinner than manufacturer's recommended spreading rate to achieve dry film thickness indicated. Provide total dry film thickness of the entire system as recommended by manufacturer.
- E. Mechanical and Electrical Work: Painting of mechanical and electrical work is limited to items exposed in equipment rooms and occupied spaces.
- F. Mechanical items to be painted include, but are not limited to, the following:
1. Uninsulated metal piping.
  2. Uninsulated plastic piping.
  3. Pipe hangers and supports.
  4. Tanks that do not have factory-applied final finishes.
  5. Visible portions of internal surfaces of metal ducts, without liner, behind air inlets and outlets.
  6. Duct, equipment, and pipe insulation having "all-service jacket" or other paintable jacket material.
  7. Mechanical equipment that is indicated to have a factory-primed finish for field painting.
- G. Electrical items to be painted include, but are not limited to, the following:
1. Switchgear (when exposed to occupied areas).
  2. Panelboards (when exposed to occupied areas).
  3. Electrical equipment that is indicated to have a factory-primed finish for field painting.
- H. Prime Coats: Before applying finish coats, apply a prime coat, as recommended by manufacturer, to material that is required to be painted or finished and that has not been prime coated by others. Recoat primed and sealed surfaces where evidence of suction spots or unsealed areas in first coat appears, to ensure a finish coat with no burn-through or other defects due to insufficient sealing.
- I. Pigmented (Opaque) Finishes: Completely cover surfaces as necessary to provide a smooth, opaque surface of uniform finish, color, appearance, and coverage. Cloudiness, spotting, holidays, laps, brush marks, runs, sags, ropiness, or other surface imperfections will not be acceptable.



- J. Transparent (Clear) Finishes: Use multiple coats to produce a glass-smooth surface film of even luster. Provide a finish free of laps, runs, cloudiness, color irregularity, brush marks, orange peel, nail holes, or other surface imperfections.
  - 1. Provide satin finish for final coats.
- K. Stipple Enamel Finish: Roll and redistribute paint to an even and fine texture. Leave no evidence of rolling, such as laps, irregularity in texture, skid marks, or other surface imperfections.
- L. Completed Work: Match approved samples for color, texture, and coverage. Remove, refinish, or repaint work not complying with requirements.

### 3.4 FIELD QUALITY CONTROL

- A. Owner reserves the right to invoke the following test procedure at any time and as often as Owner deems necessary during the period when paint is being applied:
  - 1. Owner may engage a qualified independent testing agency, at the Owners expense, to sample paint material being used. Samples of material delivered to Project may be taken, identified, sealed, and certified in the presence of Contractor.
  - 2. Owner may direct Contractor to stop painting if test results show material being used does not comply with specified requirements. Contractor shall remove noncomplying paint from Project site, pay for testing, and repaint surfaces previously coated with the noncomplying paint. If necessary, Contractor may be required to remove noncomplying paint from previously painted surfaces if, on repainting with specified paint, the two coatings are incompatible.

### 3.5 CLEANING

- A. Cleanup: At the end of each workday, remove empty cans, rags, rubbish, and other discarded paint materials from Project site.
  - 1. After completing painting, clean glass and paint-spattered surfaces. Remove spattered paint by washing and scraping without scratching or damaging adjacent finished surfaces.

### 3.6 PROTECTION

- A. Protect work of other trades, whether being painted or not, against damage from painting. Correct damage by cleaning, repairing or replacing, and repainting, as approved by Architect.
- B. Provide "Wet Paint" signs to protect newly painted finishes. After completing painting operations, remove temporary protective wrappings provided by others to protect their work.
  - 1. After work of other trades is complete, touch up and restore damaged or defaced painted surfaces. Comply with procedures specified in PDCA P1.

### 3.7 EXTERIOR PAINT SCHEDULE

- A. Ferrous Metal: Provide the following finish systems over exterior ferrous metal. Primer is not required on shop-primed items.
  - 1. Full-Gloss Alkyd-Enamel Finish: Two finish coats over a rust-inhibitive primer.

- a. Primer: Exterior ferrous-metal primer.
  - b. Finish Coats: Exterior full-gloss alkyd enamel.
- 2. Galvanized Ferrous Metal-Alkyd-Gloss
  - a. 1 Coat protective coating galvanized metal primer
  - b. 2 Coats enamel

### 3.8 INTERIOR PAINT SCHEDULE

- A. Gypsum Board: Provide the following finish systems over interior gypsum board surfaces:
  - 1. Low-Luster Acrylic-Enamel Finish: Two finish coats over a primer.
    - a. Primer: Interior gypsum board primer.
    - b. Finish Coats: Interior low-luster acrylic enamel.
- B. Ferrous Metal: Provide the following finish systems over ferrous metal:
  - 1. Semi-gloss Alkyd-Enamel Finish: Two finish coats over a primer.
    - a. Primer: Interior ferrous-metal primer.
    - b. Finish Coats: Interior semi-gloss alkyd enamel.

**END OF SECTION 09912**

DIVISION 15 - MECHANICAL

SECTION 15100

MECHANICAL REQUIREMENTS

GENERAL CONDITIONS:

The General Conditions of the Contract, with the amendments, supplements, forms and requirements in Division 1, and herewith made a part of this Division.

All sections of Division 15 shall comply with the Mechanical General Requirements. The standards established in this section as to quality of materials and equipment, the type and quality of workmanship, mode of operations, safety rules, code requirements, etc., shall apply to all sections of this Division as though they were repeated in each Division.

SCOPE OF WORK:

The project described herein is for the 2006 UDOT Region II, Administration Building Reroof. This work shall include all labor, materials, equipment, fixtures, and devices for the entire mechanical / plumbing work and a complete operating and tested installation as required for this project.

Section 15100 Mechanical General Requirements

Section 15300 Piping Systems

Section 15400 Plumbing Systems

SYSTEM DESCRIPTION:

Install secondary roof drains with no new hub fixtures.

Remove and re-install existing mechanical/plumbing piping systems as needed to accommodate the reroofing.

CODES & ORDINANCES:

All work shall be executed in accordance with all underwriters, public utilities, local and state rules and regulations applicable to the trade affected. Should any change in the plans and Specifications be required to comply with these regulations, the Contractor shall notify the Architect before the time of submitting his bid. After entering into contract, the Contractor will be held to complete all work necessary to meet these requirements without extra expense to the Owner. Where work required by drawings or specifications is above the standard required, it shall be done as shown or specified.

Applicable codes are as follows:

2003	International Mechanical Code
2003	International Building Code
2003	International Plumbing Code

## UTILITIES & FEES:

All charges for fees and permits required by this work shall be included in the Contractor's proposal. All utility connection fees shall also be included in the proposal. Unless noted otherwise, all systems furnished and or installed by this Contractor, shall be complete with all utilities, components, commodities and accessories required for a fully functioning system.

## SUBMITTALS AND SHOP DRAWINGS:

### Submittals:

As soon as possible after the contract is awarded, but in no case more than 14 calendar days thereafter, the Contractor shall submit to the Architect six (6) copies of the descriptive literature covering products and materials to be used in the installation of mechanical systems for this project. The review of the submitted data will require a minimum of 7 days. If the Contractors schedule requires return of submitted literature in less than the allotted time, the Contractor shall accelerate his submittal delivery date. The Contractor shall resubmit all items requiring re-review within 5 days of returned submittals. Refer to each specification section for items requiring submittal review. Written approval of the Owner's Representative shall be obtained before installing any such equipment or materials for the project. The submittals shall be prepared in an orderly manner, contained in a binder with index and identification tabs each item or group of items and for each specification section. All items shall be submitted at one time except seismic restraint drawings which may be submitted separately within 30 days of the contract award date. Partial submittals will not be reviewed until the complete submittal is received.

Submitted literature shall bear the Contractor's stamp, indicating that he has checked all equipment being submitted; that each item will fit into the available space with the accesses shown on the drawings; and, further, that each item conforms to the capacity and quality standards given in the contract documents.

Submitted literature shall clearly indicate performance, quality, and utility requirements; shall show dimension and size of connection points. Equipment must fit into the available space with allowance for operation, maintenance, etc.

Review by the Owner's Representative is for general conformance of the submitted equipment to the project specification. In no way does such review relieve this Contractor of his obligation to furnish equipment and materials that comply in detail to the specification nor does it relieve the Contractor of his obligation to determine actual field dimensions and conditions that may affect his work. Regardless of any items overlooked by the submittal review, the requirements of the contract drawings and specifications must be followed and are not waived or superseded in any way by the review.

By description, catalog number, and manufacturer's names, standards of quality have been established by the Architect and the Engineer for certain manufactured equipment items and specialties that are to be furnished by this Division. Alternate products and equipment may be proposed for use only if specifically named in the specifications or if given written prior approval in published addenda. Design equipment is the equipment listed on the drawings or if not listed on the drawings is the equipment first named in the specifications.

### Alternate Equipment:

The Contractor should protect himself with the supplier of alternate named equipment. Alternate named equipment will be reviewed only one time.

Should alternate equipment be submitted and be rejected, it shall not be resubmitted for review and it shall be the responsibility of this contractor. The contractor shall only submit on design equipment on future submittals. Incomplete submittal data will be rejected.

If the Engineer is required to do additional design work to incorporate changes caused by submitting equipment or products, different than the design equipment specified, as defined above, the contractor shall reimburse the engineer for additional time and expenses at the engineers current, recognized, hourly rates.

#### DRAWINGS AND MEASUREMENTS:

##### Drawings:

The contract document drawings show the general design, arrangements, and extent of the system. In certain cases, the drawings may include details that show more nearly exact locations and arrangements; however, the locations, as shown diagrammatically, are to be regarded as general.

It shall be the work of this Section to make such alterations as may be necessary to make adjustable parts fit to fixed parts, leaving all complete and in proper shape when done. All dimensions given on the drawings shall be verified as related to this work and with the Architect's office before work is started.

This Section shall carefully study building sections, space, clearances, etc., and then provide offsets in piping as required to accommodate the building structure and other existing conditions without additional cost to the Owner. In any case and at any time, a change in location required by obstacles, existing conditions or the installation of other trades not shown on the mechanical plans shall be made without charge.

The drawings shall not be scaled for roughing in measurements nor shall they be used as shop drawings. Where drawings are required for these purposes or where drawings must be made from field measurements, the Contractor shall take the necessary measurements and prepare the drawings. Shop drawings of the various subcontractors shall be coordinated to eliminate all interferences and to provide sufficient space for the installation of all equipment, piping, ductwork, etc.

The drawings and specifications have been prepared to supplement each other and they shall be interpreted as an integral unit with items shown on one and not the other being furnished and installed as though shown and called out on both.

##### Record Drawings:

Record drawings for all systems and sections of this Division shall be furnished as work of this Section. Blue-line white prints of floor plans shall be furnished by the Architect's office. These prints shall be accurately and neatly marked in colored pencil, showing all changes from schematics.

These drawings shall be reviewed with the Architect at least once each month, shall be submitted at time of final inspection, and shall be checked for accuracy. Failure to keep record drawings up-to-date shall be cause for withholding monthly payments.

#### CONTRACTOR'S USE OF BUILDING EQUIPMENT:

The Contractor may use equipment such as electric motors, fans, heat exchangers, filters, etc., with the written permission of the Owner. As each piece of equipment is used (such as electric motors and fans), maintenance procedures approved by the manufacturer are to be followed. A careful record is to be kept of the length of the time the equipment is used, maintenance procedures followed, and any difficulty encountered. The record is to be submitted to the Owner upon acceptance. All fan belts and filter media

(such as bearings) shall be carefully inspected just prior to acceptance. Any excessive wear noted shall require replacement.

#### EXISTING CONDITIONS:

The Contractor shall carefully examine all existing conditions that might affect the mechanical / plumbing systems and shall compare these conditions with all drawings and specifications for work included under this contract. He shall, at such time, ascertain and check all conditions that may affect his work. No allowance shall subsequently be made in his behalf for an extra expense incurred as a result of his failure or neglect to make such examination. This Contractor shall include in his bid proposal all necessary allowances to repair or replace any item that will remain or will be removed, and any item that will be damaged or destroyed by new construction.

The Contractor shall remove all abandoned piping, etc., required by new construction and cap or plug openings. No capping, etc., shall be exposed in occupied areas. All openings of items removed shall be sealed to match adjacent surfaces.

The Contractor shall verify the exact location of all existing services, utilities, piping, etc., and make connections to existing systems as required or as shown on the drawings. The exact location of each utility line, together with size and elevation, shall be established before any on-site lines are installed. Should elevation or size of existing main utility lines make connections to them impossible as shown on drawings, then notification of such shall immediately be given to the Owners Representative for a decision.

#### EQUIPMENT CAPACITIES:

Capacities shown for equipment in the specifications and on the drawings are the minimum acceptable. No equipment shall be considered as an alternate which has capacities or performance less than that of design equipment.

#### COOPERATION WITH OTHER TRADES:

The Contractor shall refer to other drawings and parts of this specification that cover work of other trades that is carried on in conjunction with the mechanical work such that all work can proceed without interference resulting from lack of coordination.

The Contractor shall properly size and locate all openings, chases, sleeves, and accesses. He shall provide accurate wiring diagrams to the Electrical Contractor for all equipment furnished under this Division.

The mechanical Contractor shall insure that the installation of all piping, with Articles 110-16 and 384-4 of the National Electrical Code relative to proper clearances in front of and over all electrical panels and equipment. No piping will be allowed to run over electrical panel.

#### RESPONSIBILITY OF CONTRACTOR:

The Contractor is responsible for the installation of a satisfactory piece of work in accordance with the true intent of the drawings and specifications. He shall provide, as a part of his work and without expense, all incidental items required even though these items are not particularly specified or indicated. The installation shall be made so that its several component parts will function together as a workable system and shall be left with all equipment properly adjusted and in working order. The Contractor shall familiarize the Owner's Representative with maintenance instructions as prepared by the Contractor and shall explain and fully instruct him relative to operating, servicing, and maintenance of them. The contractor shall repair or replace all ceilings damaged or removed during the construction process.

#### UNFIT OR DAMAGED WORK:

Any part of this installation that fails, is unfit, or becomes damaged during construction, shall be replaced or otherwise made good. The cost of such remedy shall be the responsibility of this Division.

#### WORKMANSHIP:

Workmanship shall be the best quality of its kind for the respective industries, trades, crafts, and practices, and shall be acceptable in every respect to the Owner's representative. Nothing contained herein shall relieve the Contractor from making good and perfect work in all details in construction.

#### SAFETY REGULATION:

The Contractor shall comply with all local and OSHA safety requirements in performance with this work. (See General Conditions). This Contractor shall be required to provide equipment, supervision, construction, procedures, and all other necessary items to assure safety to life and property.

#### WORK, MATERIALS, AND QUALITY OF EQUIPMENT:

Unless otherwise specified, all materials shall be new and of the best quality of their respective kinds and all labor shall be done in a most thorough and workmanlike manner.

Products or equipment of any of the manufacturers cited herein or any of the products approved by the Addenda may be used. However, where lists of products are cited herein, the one first listed is the design equipment used in drawings and schedules to establish size, quality, function, and capacity standards. If other than design equipment is used, it shall be carefully checked for access to equipment, electrical and control requirements, valving, and piping. Should changes or additions occur in piping, valving, electrical work, etc., or if the work of other Contractors would be revised by the alternate equipment, the cost of all changes shall be borne as work of this Division.

Pipe of foreign manufacture will not be acceptable.

The access to equipment shown on the drawings are the minimum acceptable space requirements. No equipment that reduces or restricts accessibility to this or any other equipment will be considered.

All major items of equipment are specified in the equipment schedules on the drawings or in these specifications and shall be furnished complete with all accessories normally supplied with the catalog item listed and all other accessories necessary for a complete and satisfactory installation.

All mechanics shall be capable journeymen, skilled in the work assigned to them. No one unskilled in the work which he is given to do shall be employed, and all work shall be executed in a skillful and workmanlike manner. All men employed upon this work shall be competent, faithful, orderly, and satisfactory to the Owner.

All welders shall be certified in accordance with Section IX of the ASME Boiler and Pressure Vessel Code, latest Edition.

#### PROTECTION AGAINST WEATHER AND STORING OF MATERIALS:

All equipment and materials shall be properly stored and protected against moisture, dust, and wind. Coverings or other protection shall be used on all items that may be damaged or rusted or may have

performance impaired by adverse weather or moisture conditions. Damage or defect developing before acceptance of the work shall be made good at the Contractor's expense.

All pipe openings shall be adequately covered at all times.

#### CUTTING AND PATCHING:

No cutting or drilling in structural members shall be done without written approval of the Architect. The work shall be carefully laid out in advance, and cutting, channeling, chasing, or drilling of floors, walls, partitions, ceilings, or other surfaces necessary for the mechanical work shall be carefully done. Any damage to building, piping, or equipment shall be repaired by professional plasterers, masons, concrete workers, etc., and all such work shall be paid for as work of this Division.

When concrete, grading, etc., is disturbed, it shall be restored to original condition as described in the applicable Division of this Specification.

#### FLASHING:

Roof drains which penetrate roofs or exterior walls shall be flashed. All existing plumbing vents shall be extended to not less than 12 inches above the roof. Roof flashings shall be furnished by this Contractor and installed by the Roofing Contractor. Flashings shall be seamless 4-pound sheet lead or of the type required by the Roofing Contractor. Flashings shall be of the size required by the Roofing Contractor and shall extend horizontally not less than 12 inches all around. The Mechanical Contractor shall furnish flashings for all services and shall flash and counterflash all ducts through roofs and exterior walls.

#### CLEANING AND PAINTING:

##### Cleaning:

After all tests and adjustments have been made and all systems pronounced satisfactory for permanent operation, this Contractor shall clean all exposed piping, ductwork, insulated members, fixture, and equipment installed under this Section and leave them ready for painting. He shall refinish any damaged finish and leave everything in proper working order. The Contractor shall remove all stains or grease marks on walls, floors, glass, hardware, fixtures, or elsewhere, caused by his workman or for which he is responsible. He shall remove all stickers on plumbing fixtures, do all required patching up and repair all work of others damaged by this division of the work, and leave the premises in a clean and orderly condition.

##### Removal of Debris, Etc:

Upon completion of this division of the work, remove all surplus material and rubbish resulting from this work, and leave the premises in a clean and orderly condition.

#### ALLOWANCE:

Provide a cash allowance of \$1000.00 to cover the cost of miscellaneous pipe, valves, ductwork, insulation, and accessories. This miscellaneous account will be used as directed by the Architect and Mechanical Engineer. Detailed accounting of the cost and accounts and the balance remaining shall be available to the Architect, Engineer and Owner at any time on demand. Any balance not used at the conclusion of the project shall be reimbursed to the Owner.



CONTRACT COMPLETION:

Incomplete and Unacceptable Work:

If additional site visits or design work is required by the Engineer or Architect because of the use of incomplete or unacceptable work by the Contractor, then the Contractor shall reimburse the Engineer and Architect for all additional time and expenses involved.

Guarantee:

By the acceptance of any contract award for the work herein described or shown on the drawings, the Contractor assumes the full responsibility imposed by the guarantee as set forth herein and in the General Conditions, and should protect himself through proper guarantees from equipment and special equipment Contractors and from subcontractors as their interests may appear.

The guarantee so assumed by the Contractor and as work of this Section is as follows:

That the entire mechanical system shall be quiet in operation.

That all pipes shall be perfectly free from foreign matter and pockets and that all other obstructions to the free passage of water shall be removed.

That he shall make promptly and free of charge, upon notice from the Owner, any necessary repairs due to defective workmanship or materials that may occur during a period of one year from date of Substantial Completion.

That all specialties, mechanical, and patent devices incorporated in these systems shall be adjusted in a manner that each shall develop its maximum efficiency in the operation of the system.

All equipment and the complete mechanical system shall be guaranteed for a period of one year from the date of the Architect's Certificate of Substantial Completion. Any equipment supplier not willing to comply with this guarantee period shall not submit a bid price for this project. The Contractor shall be responsible for a 100-percent guarantee for the system and all items of equipment for this period.

END OF SECTION

DIVISION 15 - MECHANICAL

SECTION 15300

PIPING SYSTEMS, SPECIALTIES AND VALVES

GENERAL CONDITIONS:

All pertinent sections of Section 15100, Division 15, are a part of the work described in this section. Division 1 is a part of this and all other sections of these specifications.

SCOPE OF WORK:

This work includes furnishing all labor and materials to complete roof drainage systems.

This work includes removal and re-installation of existing mechanical piping systems.

RELATED WORK:

Refer to Section 15100 and 15400 for piping system tests.

SUBMITTALS:

Submit product data in accordance with Division 1 and Section 15100. Submit the following:

Pipe, couplings, and fittings  
Hangers and insulated pipe supports

PIPE AND FITTINGS:

NO PIPE OF A FOREIGN MANUFACTURER WILL BE ACCEPTABLE.

All piping, fittings, flanges, etc. shall be free from defects and shall comply with the appropriate ASTM specifications.

Soil, waste and vent lines 2" and larger inside building shall be standard weight cast iron. Lines smaller than 2" shall be standard weight galvanized steel pipe with drainage type fittings. All soil, waste, and vent piping below ground shall be hub and spigot standard weight cast iron with Ty-Seal neoprene gaskets. No-Hub standard weight cast iron pipe with either M-G couplings or ABI BEST couplings may also be used below ground where approved by local jurisdiction. Waste and vent joints for cast-iron waste and vent piping above ground shall be Ty-Seal neoprene gaskets or Tyler No-Hub with high torque Clamp-All stainless steel couplings and neoprene gaskets.

Downspouts and rain water conductors above ground shall be either standard weight galvanized steel with Durham drainage fittings or standard weight cast iron with Ty-Seal gasketed joint fittings or Tyler No-Hub with high torque Clamp-All stainless steel couplings and neoprene gaskets. Under ground conductors shall be standard weight cast iron with joints as specified for under ground soil lines.

Roof drains and storm drainage lines outside of the building shall be Utah Fire Clay tile with wedge lock mechanical joint or concrete pipe or reinforced concrete pipe where shown on drawings.

## ROOF DRAIN PIPING:

Downspouts and rain water conductors above ground shall be standard service weight "No Hub" cast iron with Ty-Seal gasketed joint fittings or Tyler No-Hub with high torque Clamp-All stainless steel couplings and neoprene gaskets.

Schedule 40 galvanized steel pipe with drainage pattern cast iron screwed fittings (above ground only).

Cleanout plugs and ferrules: Cleanouts shall be of the same size as pipe, except that cleanout plugs larger than connection with cast iron soil pipe shall consist of a long sweep quarter bend or one or two eighth bends extended to an easily accessible place, or as indicated on the drawings.

## Vents / Flasing:

Vent pipes shall be flashed and made watertight at the roof as required. Vent pipes shall extend at least 12" above roof.

## PIPE HANGERS AND SUPPORTS:

All necessary structural members, hangers, and supports of approved design shall be provided to keep piping in proper alignment and to prevent transmission of injurious thrusts and vibrations. Pipe hangers shall generally be of the clevis pipe-clamp type with suspension bolts. All bolts shall have provision for vertical adjustment and shall be equipped with locknuts. Where concrete inserts are used, they shall be suitably reinforced. The Contractor shall obtain approval of the Architect for the location of such inserts prior to their installation. Spring and spring roller hangers shall be used wherever vertical movement of pipe occurs so that pipe and pipe supports shall always be in absolute contact. No hanger shall be welded directly to steel joists. Where joists occur, clips shall be installed and hanger rod attached to clips. All piping hung from joists shall be hung from joist panel points. Protective saddles shall be provided on all insulated piping at point of hanger. Hangers shall not contact pipe where pipe is specified to be insulated and hangers shall not penetrate insulation.

The following is a schedule of maximum spacing for hangers or other supports and sizes of suspension rods for piping. In addition to the spacing listed, an additional hanger shall be provided 1 foot 0 inches from each pipe drop, rise, or turn.

<u>Pipe Size</u>	<u>Rod Diameter</u>	<u>Maximum Spacing</u>
1-1/2 in. and 2 in.	1/2 in.	9 ft.
2-1/2 in. and 3 in.	5/8 in.	10 ft.
4 in. and 6 in.	3/4 in.	10 ft.
8 in. and 10 in.	7/8 in.	10 ft.
12 in. and 814 in.	1 in.	10 ft.

Pipes larger than 3 inches in diameter must be hung from beams. Where beam spacing is greater than a 10 foot 0 inch span for pipes, intermediate beams must be installed to support pipes. Groups of pipes anchored to floor slabs shall not exceed a 300-pound load between beams. Intermediate beams shall be provided to support pipes if a 300-pound load is exceeded.

Pipes larger than 3 inches which must be supported from roof joists shall be hung from every joist (max. 7'-0" o.c.). the hangers shall be within 3 inches of panel points or the mechanical Contractor shall add a brace to the joist as per the structural general notes or as directed by the architect.

Pipe hangers shall not be welded to metal pan floor. Pipe hangers shall be concrete inserts installed in holes drilled in concrete.

All hangers, supports, and anchors shall be assembled with heavy pattern, hexagon carbon steel nuts.

Perforated metal strap shall not be permitted.

Pipes above ceilings are to be grouped together and either hung from individual rod hangers or on Unistrut trapeze hangers as shown on the drawings. Pipes are to be run as high as possible for maximum clearance of attic spaces.

Risers shall be properly supported and guided at each floor. Pipe hangers, inserts, rollers, etc., and all necessary accessories required to support piping shall be provided by the Contractor, unless noted otherwise.

All soil, waste, and vent stacks shall be substantially supported at the base with either a base stack fitting and concrete block or a riser clamp resting on the floor slab.

All pipe hangers, inserts, trapezes, etc., and all necessary accessories required to support the piping shall be provided by this Contractor.

All pipe hangers shall be installed outside of insulation on all insulated lines.

Manufacturers may be Blaw-Knox, Grinnell, or Pipe Shields, Inc.

#### Pipe Insulation

##### Roof Drainage Lines:

All piping above grade shall be insulated with 1/2-inch thick Owens-Corning ASJ-25 fiberglass pipe insulation with vapor barrier jacket. The insulation shall be applied over clean, dry pipe with all joints firmly butted together. Fittings shall be similarly insulated with a fiberglass blanket insulation covered with a premolded PVC cover. Cover to be sealed to vapor seal jacket on piping. Provide a PVC cover where pipe is exposed in finished areas. Color to be selected by Architect. All rain leader bowls shall be insulated with fiberglass insulation with a field applied vapor barrier jacket consisting of fiberglass reinforced cloth and finished with insulating cement to form a smooth surface.

##### Insulated Pipe Supports:

Insulated pipe supports shall be furnished and installed by the Mechanical Contractor on all insulated pipe and tubing according to the following tables. See Pipe Insulation Specification Section. Supports shall be Pipe Shields, Inc. All designations as to hanger type refer to Pipe Shields, Inc., model numbers.

##### Horizontal Pipes:

## Model Designations

Pipe Size	Maximum Horizontal Spacing	In Ring Or Clevis Hanger		On Flat Surface		On Pipe Roll	
		Cold	Hot	Cold	Hot	Cold	Hot
Through 1-1/4"	7'-0"	CS-CW	CS	CS-CW	CS	CSX-CW	CSX
1-1/2 9'-0"	CS-CW	CS	CS-CW	CS	CSX-CW	CSX	
2 - 4 10'-0"	CS-CW	CS	CS-CW	CS	CSX-CW	CSX	
6	10'-0"	CS-CW	CS	CS-CW	CS	CSXP-CW	CSXP
8	10'-0"	CS-CW	CS	CSXP-CW	CSXP	MXP	MXP
10-16 10'-0"	CS-CW	CS	MXP	MXP	MXP	MXP	
18	10'-0"	NCP	NCP	MXP	MXP	MXP	MXP
20	10'-0"	NCP	NCP	MXP(c)	MXP(c)	MXP(b)	MXP(b)
24	9'-0"	NCP	NCP	MXP(a)	MXP(a)	MXP(a)	MXP(a)

## Notes:

- a) 7'-0" maximum spacing
- b) 8'-0" maximum spacing
- c) 9'-0" maximum spacing

## Vertical Pipes: (All Pipe Sizes)

### Pipe Riser Clamp Model      Maximum Vertical Centers

PRV	15'-0"
HPRC	40'-0"

Insulation shall be asbestos-free calcium silicate; 100 psi avg. compressive strength with a K = 0.38 BTU in/ft<sup>2</sup>/DegF/Hr. Insulating structural insert shall be asbestos-free calcium silicate; 600 psi avg. compressive strength treated with water repellent.

Jackets shall be galvanized sheet steel ASTM A-527; straps and load distribution plates to be carbon steel ASTM A-36; fasteners to be ASTM A-307, cadmium plated.

## PIPE INSTALLATION:

All piping systems shall be installed so that they can be easily drained by means of drainage of low points of all piping without disconnecting pipe. If not specifically indicated on the drawings, the frequency of draining shall determine whether drain caps, plugs, cocks, or valves are to be used. If other than valves are contemplated, the Architect's permission must be obtained.

All installed pipe lines shall be straight, free from dents, scars, and burrs, with ends reamed smooth, and shall remain straight against strains tending to cause distortion during system operation. The Contractor shall make proper allowance for pipe line expansion and contraction so that no unsightly distortion, noise, damage, or improper operation results therefrom.

Piping shall run only parallel or at right angles to the walls or axes of the building and shall be neatly organized. The Contractor shall study the architectural, structural, mechanical, electrical, and other drawings to eliminate conflict of piping with other structure lighting or other services. Unless specified otherwise, no piping shall be exposed in a finished room, except in shop or storage areas. All changes in direction shall be made with fittings.

No piping shall be run above any electrical panels, electrical equipment or access clearances for electrical for electrical panels or equipment. No piping shall be allowed to run through any electrical rooms.

All piping shall be clean and free from acids and loose dirt when installed and shall be kept clean during the completion of the installation.

Plugs of rags, wools, cottons, waste, or similar materials may not be used in plugging. All piping shall be so arranged to not interfere with removal of other equipment or devices; and to not block access to manholes, access openings, etc. Piping shall be arranged to facilitate equipment maintenance. Flanges or unions, as applicable for the type of piping specified, shall be provided in the piping at connections to all items of equipment. Piping shall be placed and installed so that there will be no interference with the installation of the air-conditioning equipment, ducts, etc. All piping shall be so installed to insure noiseless circulation. All valves and specialties shall be so placed to permit easy operation and access, and all valves shall be regulated and packed, and the glands shall be adjusted at the completion of the work and before final acceptance. All piping shall be erected to insure proper draining. No bushings, short nipples, or street-type fittings shall be used.

When insulated pipes are supported by a roller hanger they shall be protected from damage by suitable pipe covering protection saddles. Saddles shall support pipe on roller and shall be packed with insulation.

#### Pipe Sleeves:

All pipes passing through wall, floor, or ceiling construction shall be fitted with sleeves. Each sleeve shall extend through its respective floor, ceiling, or wall and shall be cut flush with each surface except in unfinished areas. Unless otherwise specified, sleeves shall be two pipe sizes larger in diameter than the uninsulated passing pipe. Sleeves in outside walls shall be made of galvanized steel pipe with a water-stop flange.

Sleeves in all finished room floors shall be left flush with floor and caulked watertight around pipe; sleeves in unfinished room floors and under cabinets shall be left standing 2 inches above finished floor. All sleeves are to be caulked watertight with sealing mastic.

All sleeves, except in concrete walls, shall be furnished and installed as work of this Section.

Sleeves for concrete or masonry shall be galvanized steel or cast iron pipe. Sleeves for stud walls shall be 26-gauge galvanized iron. These shall be furnished and installed in close cooperation with the craft involved. These sleeves shall be of sufficient size to readily clear the pipe or pipes and insulation passing through sleeve. Everything more than 6 inches in diameter or groups of multiple piping shall be approved by the Architect.

**Bare Pipe:** All pipe penetrating fire walls and floors shall be encased in adjustable sheet metal cans sized for maximum one-inch spacing between pipe and can. Spacing shall be packed on either end with UL rated ceramic fiber strip insulation. Pipe Shields, Inc., Model WFB.

**Insulated Pipe:** Same as for bare pipe, but with the addition of a 360 degree water-proofed calcium silicate insert with metal shielding, all sized to extend to a minimum of one-inch beyond wall or floor. Pipe Shields, Inc., Model WFB-CS-CW for chilled water, and Model WFB-CS for all other insulated lines.

Sleeve and packing shall have the same fire rating as the construction in which they are installed. Any substitutions must have passed the ASTM E-119 test per UBC 43-1 for pipe penetrations.

2 All holes required for piping through floors or walls, where sleeves have not been installed, shall be core  
drilled one pipe size larger in diameter than passing pipe.

4 This Division shall be responsible for the proper sizing and positioning of all necessary boxes and sleeves  
through walls and floors to accommodate this work. Exact location of exterior wall penetrations shall be  
6 coordinated with the Architect prior to core drilling.

8 ANCHORS AND GUIDES:

10 All pipes shall be securely anchored where necessary to properly distribute expansion stresses. All vertical  
risers shall be anchored at the midpoint and at additional locations as required.

12 Anchors shall be located where indicated by the drawings or required and shall be applicable to the type of  
14 piping installed. All anchor bolts, after tightening, shall be welded to the anchor frame in such a manner that  
all anchor bolts are effective. Additional restraining pipe supports shall be provided wherever danger of  
16 excessive pipe movement exists.

18 Aligning guides of the concentric ring type shall be installed and anchored at all locations where piping may  
be distorted from the normal centerline movement of the piping and on either side of all expansion joints.  
20 Two guides, spaced 3 feet 0 inches on centers shall be provided at each side of the expansion joint or the  
expansion loop. Job or shop-fabricated guides are not acceptable.

22  
24  
26  
END OF SECTION

N:\6000\6400\6462 UDOT Reroof\Secretary\Specifications\15300.wpd

DIVISION 15 - MECHANICAL

SECTION 15400  
PLUMBING SYSTEMS

GENERAL CONDITIONS:

All pertinent sections of Section 15100, Division 15, are a part of the work described in this section. Division 1 is a part of this and all other sections of these specifications.

SCOPE OF WORK:

This work shall include a complete rainwater system. All new and existing roof drains (RD's and RDO's) associated with the reroofing areas are to be provided with new stainless steel anchor bolts, washers, and nuts. Bolts, washers, and nuts are to match those being provided with the new roof drains and roof drain overflows being installed.

CODES AND STANDARDS:

All work included in the scope of this specification shall conform to the latest adopted versions of applicable codes and standards, including the following:

International Plumbing Code

International Building Code

International Mechanical Code

UOSHA

IAPMO

PDI

Utah State Building Board Planning and Design Criteria To Prevent Architectural Barriers for the Aged and Physically Handicapped.

SUBMITTALS:

Submit product data in accordance with Division 1 and Section 15100. Submit the following:

Roof drains and accessories  
Pipe materials

TESTS:

The roof drainage piping shall be tested by plugging all outlets and filling the lines with water to the highest roof opening. The water level shall not drop more than 3 inches in 1 hour. All joints within the building shall be inspected for visible leaks.



2 Defective Work: If inspection or tests show defects, such defective work or material shall be replaced or  
corrected and inspection and tests shall be repeated. All repairs to piping shall be made with new materials.  
4 No caulking or screwed joints or holes will be acceptable.

6 All defects in material and workmanship which appear during the test shall be promptly remedied and the  
test shall be reapplied.

8 Enclosed Piping: Any piping which is to be insulated, placed within the construction, or otherwise concealed  
shall be carefully tested before being permanently enclosed.

10 Test Instruments: All testing shall be performed in the presence of the Architect or his Mechanical Engineer  
12 and shall meet with their approval. Instruments required for making the tests shall be provided by this  
Contractor. Relief valves set to avoid excessive pressure during testing shall be provided.

14 Required Adjustments: Before final acceptance of the piping system as a whole, this Contractor shall make  
16 all required adjustments and shall place the entire piping system in a perfect operating condition. At the  
completion of the work, this Contractor shall furnish the Architect with all certificates of inspection.

#### 18 GENERAL REQUIREMENTS:

##### 20 Existing Lines:

22 Any utility line uncovered during construction that is not clearly defined on the drawings shall be immediately  
24 brought to the attention of the Architect and Owner. The Owner and Architect will subsequently inform the  
Contractor what should be done. Relocation of any existing piping shall be done with the same material and  
26 fittings as the original installation. Damaged or removed insulation shall be repaired and/or replaced.

##### 28 Cleanouts:

30 Full size cleanouts shall be installed at the base of each rainwater stack. All other cleanouts shall be installed  
where shown on the drawings and where required by State, local, or National Plumbing Codes.

32 Cleanouts shall have cast-iron bodies with threaded brass screw plugs. They shall be the full size of the pipe  
34 line in which they are installed, up to and including 4 inches. All cleanouts shall be installed in locations  
easily accessible for rodding. Where stacks or other piping is concealed, cleanouts shall be installed above  
36 the floor with extensions made to the finished wall surface. Cleanouts in walls shall be J. R. Smith 4402 with  
countersunk plugs and round stainless steel access covers. In floors, J. R. Smith 4023 square top cleanouts  
38 with countersunk plugs and round scoriated polished nickel bronze access covers with frames shall be used.

40 Cleanouts shall be J. R. Smith, Zurn, Wade, or Josam. J. R. Smith references are used herein.

##### 42 Flashing and Sleeves:

44 Furnish and install on each pipe passing through the roof a Stoneman Stormtite four pound seamless lead  
flashing assembly extending horizontally not less than 12-inches all around. Flashing to have steel reinforced  
46 conical boot and counter-flashed with a hooded cast iron counter-flashing. Seal the neck of the flashing to  
the pipe with permaseal waterproofing compound and secure the counter-flashing to the pipe with vandal  
48 proof screws. Fill the top annular space of counter-flashing with epoxy compound. Alternate using open top  
models of all pipes. See specification Section 15100.

50 Sleeves for pipes passing through walls, floors or ceilings shall be as specified in Section 15300.  
52

### Roof Pans:

Roof pans shall be 4-pound lead sheet pans 40 inches square or as noted. Roof flashing members shall be placed into position but the final installation shall be made by the Roofer under supervision of this section. Floor drains with clamping collars shall be complete with pan.

### Courses of Pipe:

Water pipes shall not be exposed in finished rooms except where noted on plans or as permitted by the Architect, except the finished brass supplies that are a part of the fixture trimmings. Pipes are to be run in tunnel, furred ceiling and walls, and behind or under cabinets as shown.

### Piping Layouts:

Layout of piping shown on drawings is in a general sense diagrammatic as to the exact location of piping. It is to be understood by the Contractor that unforeseen conditions and obstacles at the site may not permit the running of piping as scaled from the drawings, but changes shall not be made without the written permission of the Architect.

### PLUMBING FIXTURES:

This Contractor shall furnish and install all fixtures shown on the drawings or specified hereinafter, shall make all parts complete, and shall leave the entire system in perfect working order. He shall clean and adjust all fixtures before leaving the job. Any damaged or cracked fixtures shall be replaced at the Contractor's expense.

### Fixture Schedule:

#### (ROOF DRAINS)

RDO-1 Roof Drain: J.R. Smith 1080-RC cast iron overflow roof drains with flashing clamp and cast iron dome, sump receiver, (suffix-R), underdeck clamp (suffix C), and stainless steel anchor bolts, washers, and nuts. Size shown on Plans.

DSN-1 Downspout Nozzle: Smith 1770-PB cast bronze body and flange, polished bronze finish. Size shown on plans.

END OF SECTION

November 3, 2006

Mr. Bob Anderson  
State of Utah DFCM  
4110 State Office Bldg  
Salt Lake City, Utah 84114

Ref: Batch #72025, Lab #DFC1178  
Received November 2, 2006  
Test Report  
Hazardous Materials Program  
Analytical Air & Bulk Testing Services  
DFCM PO #44959  
UDOT Region II Admin Bldg, SLC UT  
Sampled by Bob Anderson, 10/25/06, 09:30

Dear Mr. Anderson:

Sample DFC1178 has been analyzed by visual estimation based on EPA-600/M4-82-020 December 1982 optical microscopy test method. Appendix "A" contains statements which an accredited laboratory must make to meet the requirements of accrediting agencies. It also contains additional information about the method of analysis. Appendix "A" must be included as an essential part of this test report.

This report may be reproduced but all reproduction must be in full unless written approval is received from the laboratory for partial reproduction. The result of analysis is as follows:

Lab DFC1178, Field AB-001 Asphalt roofing material

This sample contains five types of material: The first type is shiny black tar with layers of 50% plant fiber in black tar felt; the second type is gray plastic with cross-woven synthetic fiber; the third type is white foam plastic; the fourth type is 60% fiberglass in white binder; the fifth type is 20% plant fiber in brown binder with perlite, rocks and debris. This sample is non-homogeneous. **Asbestos is none detected.**

The first type is 40% of the sample. The second type is 15% of the sample. The third type is 10% of the sample. The fourth type is 5% of the sample. The fifth type is 30% of the sample.

Batch #72025  
Lab #DFC1178  
Page 2 of 2

In order to be sure reagents and tools used for analysis are not contaminated with asbestos, blanks are tested. Asbestos was none detected in the blanks tested with this bulk sample set

Very truly yours,

Steve H. Dixon, President

Analyst: Bruce P. Thorne \_\_\_\_\_ Date Analyzed: 11/3/06